



OCCASION

This publication has been made available to the public on the occasion of the 50th anniversary of the United Nations Industrial Development Organisation.



DISCLAIMER

This document has been produced without formal United Nations editing. The designations employed and the presentation of the material in this document do not imply the expression of any opinion whatsoever on the part of the Secretariat of the United Nations Industrial Development Organization (UNIDO) concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries, or its economic system or degree of development. Designations such as "developed", "industrialized" and "developing" are intended for statistical convenience and do not necessarily express a judgment about the stage reached by a particular country or area in the development process. Mention of firm names or commercial products does not constitute an endorsement by UNIDO.

FAIR USE POLICY

Any part of this publication may be quoted and referenced for educational and research purposes without additional permission from UNIDO. However, those who make use of quoting and referencing this publication are requested to follow the Fair Use Policy of giving due credit to UNIDO.

CONTACT

Please contact <u>publications@unido.org</u> for further information concerning UNIDO publications.

For more information about UNIDO, please visit us at www.unido.org

22258

OFFICE:

No. 201

Mahestan Bld.

Enghelab Sqr.

TEHRAN IRAN

Tel. 00 98 21 6432854

Fax 00 98 21 6420759

Sobouhi

Final Report

(Page 1)



REPORT

CONVERSION OF

SOBOUHI Co.

HOT CHAMBER

FINAL REPORT

Contract No. 99/044P

UNIDO's PROJECT No. MP/IRA/98/086

10 Nov. 99

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 2)



TABLE OF CONTENTS

- 1-SYNOPSIS
- 2-INTRODUCTION
- 3-ICRC HOT CHAMBER CHARACTERISTICS
- 4- PLANT HOT CHAMBER, TECHNICAL CHARACTERISTICS
- 5- CENTER HOT CHAMBER TECHNICAL CHARACTERISTICS
- **6-ACTIVITIES**
- 7 SUPPLY PARTS AND MATERIALS
- **8-CONCLUSION**
- 9-RECOMMENDATION
- **10-ATTACHMENTS**

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 3)




SYNOPSIS

Under supreme supervision of UNIDO the CFC phase project has been implemented in Iran to phase out 100 % ODS in some Iranian White Industries

The project No. MP/IRA/98/086 has been nominated to Islamic Republic of Iran for the Multilateral Fund for the implementation of The Montreal Protocol Financing.

The project was approved by Montreal Protocol Multilateral Fund executive committee. The project was actually started in November 1994, but the implementation of the project has been already started from January 1994, by recommendation of Montreal Protocol and request of Government of Islamic Republic of Iran, the refrigerant R134a was finally approved and selected by UNIDO as an alternative for refrigerant R12.

Sobouhi Co. As a home appliance and Industrial Refrigrator manufacturer in Iran the main activities of Sobouhi Co., is producing refrigerators and freezers,





INTRODUCTION

According to UNIDO contract No. 99/044P with Industrial Control Research Center Co. (ICRC) the existing Sobouhi Co. hot chambers facilities—shall be converted and modified to phase out CFC-12 and suitable for R134a refrigerant to perform functionality and performance test of converted refrigerators and complying with ISO standards 7173, 8187, and 5155.

1 This proposal has been prepared based on the requirements of Islamic Republic of Iran indicated in the country program no *UNEP/OZL.PRO/EX COM/10/24* dated 27 May 1993 prepared by **UNDP**.

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 5)



- 2 The CFC phase out project in *Sobouhi Co.* will enable *Sobouhi Co.* to convert the existing production line facilities and existing hot chambers into Non CFC production line, using R134a refrigerant.
- 3 The converted Hot Chamber Installations will provide more than 20 data points in the refrigeration circuit this means more information and the ability of analyzing refrigeration system and new refrigerant effect.
- 4 The reconstructed Hot Chamber will be able to check and test 2 refrigerator and/or ref.-freezers units at the same time. The same equipment and data processing system, as will be used at plant test room will be installed in this chamber.
- 5 The immediate effect of this project at **Sobouhi Co.** is to perform all required check and tests, suitable for Refrigerator & Freezers using Ozone Friendly Gases. The existing test facilities in **Sobouhi Co.** are not adequate for check and testing, converted ref. and freezer units, in addition to that the hot rooms are not able to perform Energy Consumption and Optimization Program.

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 6)



ICRC Hot Chamber Characteristics

In order to convert *Sobouhi Co.* hot rooms facilities , ICRC shall provide following services:

- Supply of new equipment.
- Redesign of old equipment
- Delivery of technical drawings and software.
- Installation and commissioning.
- Start-up of the equipment and the technology.
- On-the-job training of the plant personnel.

With respect to **ISO** standards test requirements, and for the purpose of functionality and performance tests of the new redesigned Refrigerator and Ref.-Freezers using R134a refrigerants. The existing hot room in *Sobouhi Co.* is being converted and equipped in such a way to enable *Sobouhi Co.* to check and test at least one different models of refrigerators and freezers at ambient temperature 32 to 43 degree centigrade at one hot room chambers. In addition to these services is providing. But the hot room is capable to test eight refrigerators and freezers in case of adding more transducers and sensors in the main panel in the hot room:

- a) Procurement of new test measurement and data processing equipment.
- b) Redesign and rebuilding of presently used equipment and installation.
- c) Installation, commissioning, trial operation, start-up and on-the-job training

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759


Sobouhi Final Report (Page 7)



SOBOUHI HOT CHAMBER TECHNICAL SPECIFICATION

As previously mentioned, *Sobouhi Co.*'s plant is producing 50 refrigerator daily. And subsequently the hot chamber should have been able to cover plant daily test requirement as well as other activities. Therefore, the converted hot chamber should respond to all test requirement and be able to meet ISO standards numbers 7371, 5155, 8187 as set forth in the contract and IJISI, Iranian standards numbers 254, 2482, 2818. The plant hot chamber technical specification are as follows:

- Hot Chamber Dimension about 3 mt. by 3 mt.
- Refrigerator test ability simultaneously, 2 units and ability to test 6 sample out of the room
- Ability to perform following operational tests and report:
 - 1 Pull down test.
 - 2 Continuous run test.
 - 3 Cyclic run test.
 - 4 Ice Freeze test.
 - 5 Energy consumption test





- 20 Measuring points, including. (for each applia.)
 - 1 Humidity, one point for one hot room.
 - 2 Compressor Power, 2 point
 - 3 Motor current, 2 point.
 - 4 Supply Voltage, 2 point.
 - 5 Hot chamber air temperature reading, one point.

160 points for eight models in case of improving the system by spending very low costs.

- Computerized graphical diagram of the refrigerator performance data sheet.
- Test measurement tolerance for temperature reading 0.3 degree centigrade.
- Computerized data processing system.
- Full color test sheet system reporting.


Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 9)



- On screen and data reporting system ability with following characteristics;
 - 1 Test number.
 - 2 Product name.
 - 3 Product model
 - 4 Product internal volume
 - 5 Compressor name
 - 6 Compressor model
 - 7 Compressor cooling capacity
 - 8 Compressor current
 - 9 Thermostat setting
 - 10 Thermostat type.
 - 11 Total test running time.
 - 12 Ambient temperature.
 - 13 Voltage rating
 - 14 Working percentage





- 15 Evaporator mean air temperature
- 16 Cabin mean temperature
- 17 Evaporator bulb temperature
- 18 Crisper temperature.
- 19 Actual compressor running time
- 20 Energy consumption
- 21 Compressor motor winding temperature
- 22 Compressor shell temperature.
- 23 Compressor discharge temperature.
- 24 Condenser inlet temperature.
- 25 Condenser out let temperature.
- 26 Condenser mid temperature
- 27 Evaporator inlet temperature
- 28 Evaporator outlet temperature.
- 29 Freezing temperature.
- 30 Refrigeration system condition display.

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 11)



ACTIVITIES

The following activities were accomplished so far toward achievement of the contract requirement as set forth by **UNIDO** and the counterpart.

- 1 Planning for;
 - a) Hot chambers system management.
 - b) Hot chambers graphic display management.
 - c) Hot chambers calibration setting parameters.
 - d) Hot chambers test standards management
- 2 Preparing material requirement list.
- 3 Component and material supply source evaluation.
- 4 Technical data collecting.
- 5 Engineering drawing for electronic and electrical system
- 6 Hot chamber design review.



Sobouhi Final Report (Page 12)

- 7 Data processing software planning.
- 8 Data processing hardware planning.
- 9 Thermal amplification electronic cart design
- 10 Preparation of timer 1 flow chart..
- 11 Initial test of data loggers electronic cart.
- 12 Initial connection of data loggers to the computers.
- 13 Interface electronic cart design for PC and operating system.
- 14 RTX3 electronic diagram design.
- 15 RTX electronic diagram design.
- 16 UNIDO, CRC 386 design.
- 17 UNIDO, TC- 100 design.
- 18 UNIDO, in-out CRC design.
- 19 Preparation of operating system display flow chart.



Sobouhi Final Report (Page 13)

20 - Visits and coordination;

20/1:

- -Visiting plant One day, One engineer, one time.
- -Visiting and coordinating with UNDP office.
- -Technical negotiation with **Sobouhi** Co. engineers and hot chamber in order to coordinate activities.
- -Advising for the necessary modification on the Room.

20/2:

- -Visiting plant 3 days, 5 engineer and Technician, one time.
- -Installation Electronic Panel
- -Installation Electrical Panel
- -Completing The Room
- -Starting Test
- -Controlling Condition Of the Room
- -Testing 2 Samples for Energy Consumption
- -Testing 2 Samples for Performance Test
- -Testing 2 Samples for Fume Quality
- -Teaching the technical Test

20/3:

- -Visiting plant 2 days, 2 engineer and One Technician, one time.
- -Testing Controlling Condition Of the Room
- -Testing 2 Samples for Energy Consumption
- -Testing 2 Samples for Performance Test
- -Testing 2 Samples for Fume Quality
- -Teaching the technical Test

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 14)



- -Visiting and coordinating with UNDP office .
- -Technical negotiation with *Sobouhi Co.* engineers and hot chamber in order to coordinate activities.
- -Advising for the necessary modification on the Samples .

21 - Soft Ware:

- -data gathering
- -calibrating
- -printing
- -editing
- -humidi curving
- self checking

All software are installed and Started

Mahestan Bld. Enghelab Sqr. TEHRAN IRAN

Tel. 00 98 21 6432854 Fax 00 98 21 6420759

Sobouhi Final Report (Page 15)



SUPPLY PARTS AND MATERIALS

In order to fabricate components and electronic kits following material and parts have been purchased so far.

- 1 Semiconductor sensors for measuring temperature from 30 to + 110 degree centigrade. 32 each
- 2 Electronic humidity measurement sensor 1 each
- 3 Electronic data logger cart for temperature measurement 2 each
- 4 Electronic data logger cart for humidity Calibration 1 each
- 5 ADC912 Converter IC for system conversion management.
- 6 Electronic parts consist of resistor. IC, capacitor, and diode.
- 7 Main Electronic Data Log
- 8 (2*24) Electronic Sensors for Thermal Measuring
- 9 (2*4) Electronic Sensors for Thermal Measuring of Condenser
- 10 -Heater Controller contractors



```
Sub Load Spec ()
    Dim a50 As String * 50
End Sub
Sub Noc MouseDown (b As Integer, S As Integer, X As Single,
Y As Single)
End Sub
Sub NocPnl_MouseDown (b As Integer, S As Integer, X As
Single, Y As Single)
    nn = NocPnl.Height / 4
    If (Y < nn) And (CopyNomber > 1) Then
        CopyNomber = CopyNomber - 1
    ElseIf (Y > (nn + nn + nn)) And (CopyNomber < 3) Then
        CopyNomber = CopyNomber + 1
    ElseIf (CopyNomber < 1) Then
        CopyNomber = 1
    ElseIf (CopyNomber > 3) Then
        CopyNomber = 3
    End If
    NocPnl.Caption = ".Copy No. = " & CopyNomber
End Sub
Sub PageTest Click ()
    PageTestNameTxt.Text = PageTest.Caption
    PageTestNameTxt.Visible = True
    PageTestNameTxt.SetFocus
```



```
End Sub
Sub PageTestNameTxt KeyDown (KeyCode As Integer, Shift As
Integer)
    If KeyCode = 13 Then
        PageTest.Caption = PageTestNameTxt.Text
        PageTestNameTxt.Visible = False
    End If
End Sub
______
Sub Print All ()
    screen.MousePointer = 11
    sl = 0
    st = -8
              1-3
    sw = 210 '202
    sh = 280'275'280
    dw = 1
    printer.ScaleLeft = sl
   printer.ScaleTop = st
   printer.ScaleWidth = sw
   printer.ScaleHeight = sh
    printerdrawwidth = dw
    armic.Picture = Hr.FactoryIcon.Picture
    first = 0
    If Spec chk. Value = True Then
        Call PrintArm(0)
        Call PrintVersion
        Call PrintProductSpec
        Call PrintResult(0)
        Call PrintRemark
        Call PrintName
        first = 1
    End If
    If Graph chk. Value = True Then
        For page = 1 To PrnPageNo
```



```
If first = 0 Then first = 1 Else printer.NewPage
            printer.ScaleLeft = sl
            printer.ScaleTop = st
            printer.ScaleWidth = sw
            printer.ScaleHeight = sh
            printerdrawwidth = dw
            Call PrintArm(CInt(page))
            Call PrintVersion
            Call PrintResult(CInt(page))
            Call PrintShape(CInt(page))
            Call PrintCrv(CInt(page))
        Next page
    End If
    printer.EndDoc
    screen.MousePointer = 0
End Sub
_____
Sub PrintArm (page As Integer)
    X0 = 0
    y0 = 0
    armic.Visible = True
    sl = printer.ScaleLeft
    st = printer.ScaleTop
    sw = printer.ScaleWidth
    sh = printer.ScaleHeight
    printer.ScaleMode = 3
    printer.Print ""
    rx = printer.ScaleWidth / sw
    ry = printer.ScaleHeight / sh
    W0 = printer.ScaleWidth
    H0 = printer.ScaleHeight
    left0 = 171 * rx
    Top0 = 10 * ry
    X = PrintWindow(printer.hDC, left0, Top0, W0 * 1.75, H0
* 1.75, armic.hWnd)
    'left0 = 171 * rx
    'Top0 = 12 * ry
```




```
'X = PrintWindow(printer.hDC, left0, Top0, W0 * 1, H0 * 1,
armic.hWnd)
    armic.Visible = False
    printer.ScaleLeft = sl
    printer.ScaleTop = st
    printer.ScaleWidth = sw
    printer.ScaleHeight = sh
    armic.Visible = False
    printer.DrawWidth = 4 * printerdrawwidth
'Print arm
    printer.ForeColor = Blue
    printer.Line (15, 0)-(200, 270), , B
                                                     'BOX
AROUND SHEET
   printer.Circle (5, 103), 3
    printer.Circle (5, 183), 3
    Y = 155
    printer.DrawWidth = 3 * printerdrawwidth
    X0 = 174
    v0 = 5
    printer.Line (15, 30)-(200, 30), Magenta
                                                    'only
red
    printer.FontName = "arial"
    1______
    printer.FontSize = 7
    printer.FontBold = True
    printer.ForeColor = Black
   printer.CurrentX = 20
    printer.CurrentY = 2:
                                        printer.Print
"Printing in Labaratory Of"
    printer.CurrentX = 20
   printer.CurrentY = 6:
                                        printer.Print
Factory
    1______
   printer.FontSize = 19
    printer.FontBold = True
   printer.ForeColor = Green
   printer.CurrentX = 70
   printer.CurrentY = 3:
                                        printer.Print
Factory0
    Y = 1 + printer.TextHeight(a$) + 4
    printer.FontSize = 11
   printer.FontBold = True
```




```
a$ = "TestDate:"
    printer.FontItalic = True
    printer.ForeColor = Cyan
    printer.CurrentX = 20
    printer.CurrentY = 18:
                                         printer.Print a$
    b$ = grffile
    a\$ = Mid(b\$, 1, 2) \& "/"
    a\$ = a\$ \& Mid(b\$, 3, 2) \& "/"
    a$ = a$ & Mid(b$, 5, 2) & "
    a\$ = a\$ \& Mid(b\$, 7, 2) \& ":"
    a\$ = a\$ \& Mid(b\$, 11, 2)
    printer.FontItalic = False
    printer.ForeColor = Black
    printer.CurrentX = 45
    printer.CurrentY = 18
    printer.FontSize = 13:
                                         printer.Print a$
    printer.FontSize = 11
    a$ = IIf(page = 0, "TestName:", "PageTestName:")
    printer.FontItalic = True
    printer.ForeColor = Cyan
    printer.CurrentX = 20
    printer.CurrentY = 24:
                                         printer.Print a$
    a$ = PageTest.Caption
                                             "Cycling
Performance"
    printer.FontItalic = False
    printer.ForeColor = Magenta
    If page = 0 Then
        printer.CurrentX = 45
    Else
        printer.CurrentX = 60
    End If
    printer.CurrentY = 24:
                                         printer.Print a$
    a$ = "Report No.:"
    printer.FontItalic = True
    printer.ForeColor = Cyan
    printer.CurrentX = 110
                                         printer.Print a$
    printer.CurrentY = 18:
    If page = 0 Then
        a$ = "Spec & Remark"
    Else
```



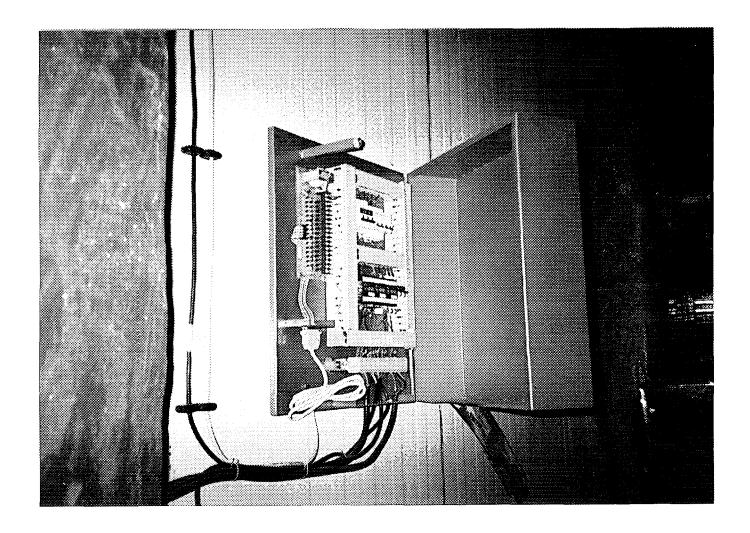


Mahestan Building Enghelab Sqr. TEHRAN IRAN Tel. 0098-21-6432854 Fax 0098-21-6420759



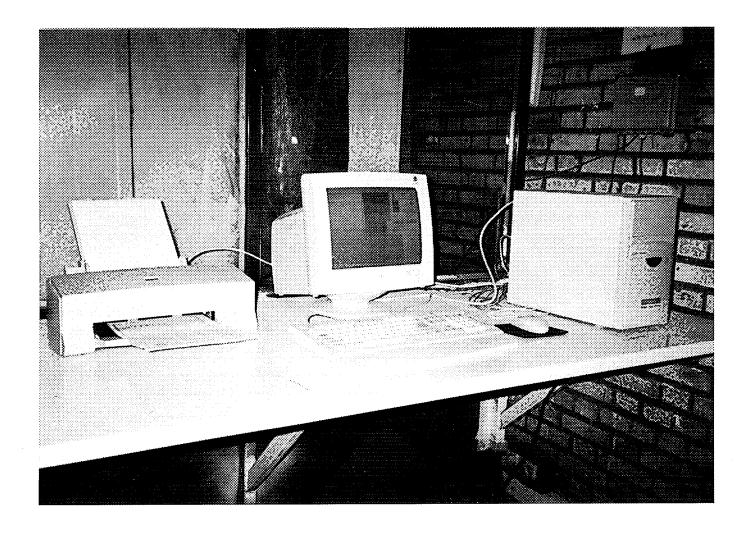




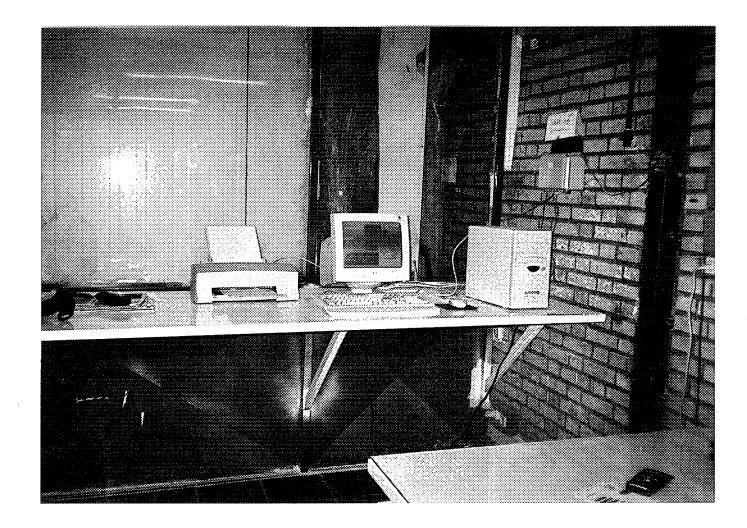


Mahestan Building Enghelab Sqr. TEHRAN IRAN Tel. 0098-21-6432854

Fax 0098-21-6420759



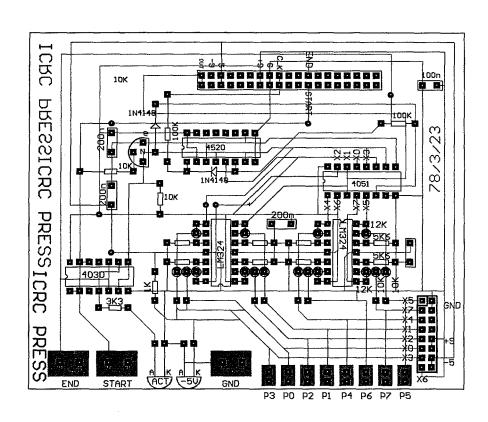



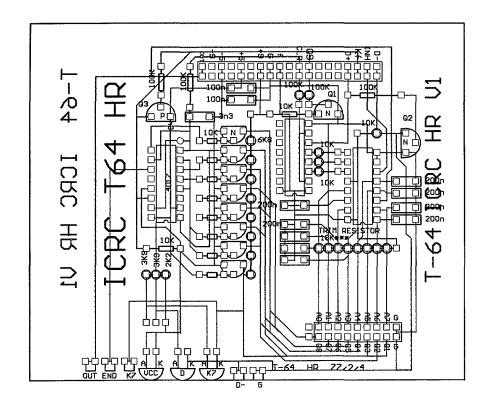

Printing in Labaratory Of SOBUHI Co. Hr

SOBUHI Co. Hr



TestDate:

78/08/12 08:14

Report No.: (

) - Page

PageTestName:

Energy Consumtion

ReportDate: 98/10/19 20:57

Page Result:

1 - Page Test Time 10 Hours 2 - Working Percent 83 %On

2 - Working Percent 83 %On

3 - Energy (Accord to page) 2.524 kwh

4 - Zoom Time 6:38 Hour

5 - Compr Gurrent 1.35 Amp

6 - Evaprator Mean Temp -12.5 C

7 - Cabin Niean Temp 1.4 C

8 - Crisp Temp 2.6 C

9 - Gompr Temp **72.5 C**

10- Condensor in Temp 35.3 C

11- Condensor Out Temp 57 C

12- Condition 31.1 C 20 %H


13- Volt Max=225 Mean=220 Min=216


14.

15.

46.-

17.

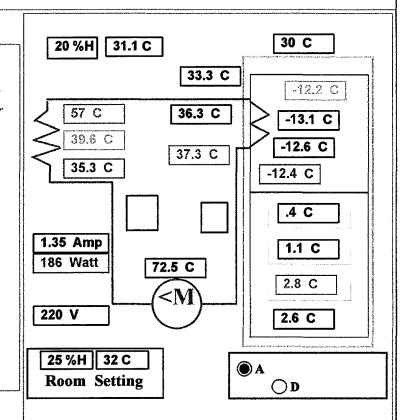

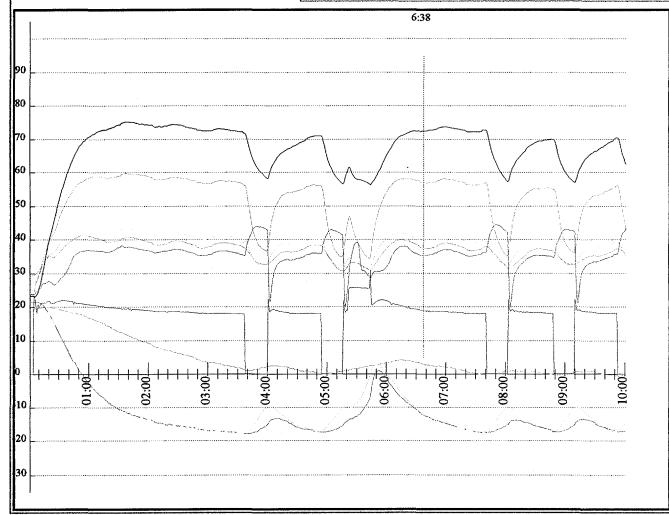

Industrial Control Research Center HotRoom Ver 5

Printing In Labaratory Of SOBUHI Co. Hr

SOBUHI Co. Hr



TestDate:

78/08/12 08:14

Energy Consumtion

Report No.: () - Page ReportDate: 98/10/19 21:06

Page Result:

PageTestName:

1 - Page Test Time 10 Hours 74 %On 2 - Working Percent

3 - Energy (Accord to page) 2.545 kwh

4:46 Hour 4 - Zoom Time

5 - Compr Current

1.37 Amp

6 - Evaprator Mean Temp

-17 C

7 - Cabin Wean Temp

-.2 C .2 C

8 - Crisp Temp

9 - Compr Temp

71 C

10- Condensor In Temp 11- Condensor Out Temp 35.9 C 56.3 C

12-Condition

33.3 C 20 %H


13- Volt Max=226 Mean=221 Min=211


14.

15-

16.

17.

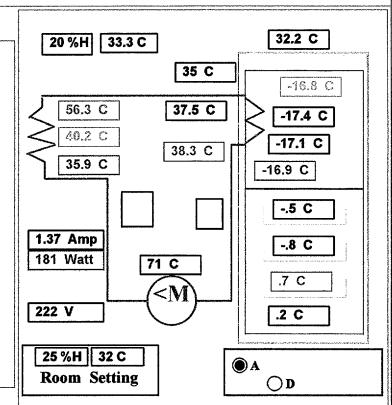

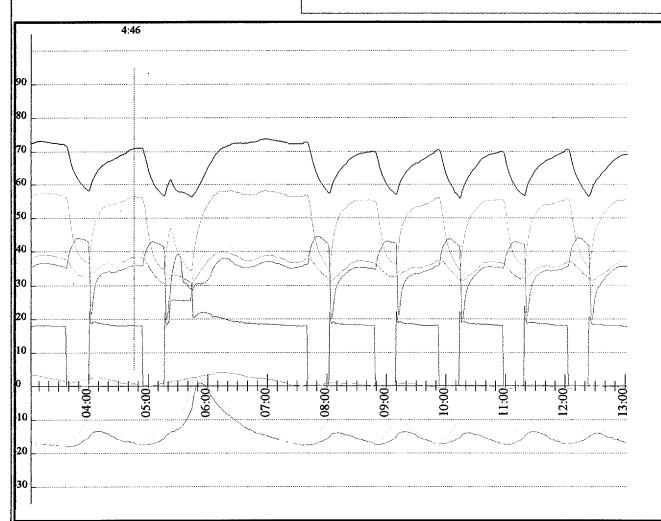

Industrial Control Research Center HotRoom Ver 5