



TOGETHER
for a sustainable future

OCCASION

This publication has been made available to the public on the occasion of the 50th anniversary of the United Nations Industrial Development Organisation.



TOGETHER
for a sustainable future

DISCLAIMER

This document has been produced without formal United Nations editing. The designations employed and the presentation of the material in this document do not imply the expression of any opinion whatsoever on the part of the Secretariat of the United Nations Industrial Development Organization (UNIDO) concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries, or its economic system or degree of development. Designations such as “developed”, “industrialized” and “developing” are intended for statistical convenience and do not necessarily express a judgment about the stage reached by a particular country or area in the development process. Mention of firm names or commercial products does not constitute an endorsement by UNIDO.

FAIR USE POLICY

Any part of this publication may be quoted and referenced for educational and research purposes without additional permission from UNIDO. However, those who make use of quoting and referencing this publication are requested to follow the Fair Use Policy of giving due credit to UNIDO.

CONTACT

Please contact publications@unido.org for further information concerning UNIDO publications.

For more information about UNIDO, please visit us at www.unido.org

BLENDING OF ALCOHOL WITH DIESEL FUELS

VOLUME 1 of 2

REPORT

BLENDING OF ALCOHOL WITH DIESEL FUELS

VOLUME 1 of 2

REPORT

CONTENTS

	Page
EXECUTIVE SUMMARY	1
ABSTRACT	3
ETHANOL/DISTILLATE EMULSIFIED BLENDS IN DIESEL ENGINES	4
1. INTRODUCTION	4
2. EXTENSION OF DIESEL FUELS WITH ALCOHOLS	5
2.1 Background	5
2.2 Technology Description and Research and Development Rationale	6
2.3 Commercial Suitability Criteria	8
2.4 Physical Suitability Criteria	10
3. PROJECT DESCRIPTION	11
3.1 Project Objectives	11
3.2 Project Work Programme	11
3.3 Main Findings and Main Conclusions	11
3.4 Diesel Engine Thermodynamic Performance	12
3.5 Conclusions on the Results Obtained	16
4. POTENTIAL FOR INDUSTRIAL/COMMERCIAL APPLICATION	17
5. ENGINE PERFORMANCE TESTS	19
5.1 TEST ENGINES	19
5.2 ENGINE TEST EQUIPMENT AND MEASURING METHODS	20
5.3 TEST FUELS	28
5.4 ENGINE MATRIX TESTS	30
5.5 ENGINE MATRIX TEST RESULTS	32
5.6 DISCUSSION OF ENGINE TEST RESULTS	41
5.7 CONCLUSIONS ON ENGINE PERFORMANCE	43
6. TOYOTA LANDCRUISER	43
7. RECOMMENDATIONS	45

Photographs :

Ph.G.1
Ph.G.2
Ph.G.3
Ph.G.4
Ph.G.5

TABLES

		Page
Table 1.	Comparison of Currently Available Methods for Achieving Substitution of Alcohol in Existing Diesel Engines	9
Table 2.	Maximum Cylinder Pressure	13
Table 3.	Maximum Rate of Cylinder Pressure Rise	13
Table 4.	Ignition Delay	14
Table 5.	Observed Engine Torque	15
Table 6.	Thermal Efficiency	15
Table 7.	Brake Specific Fuel Consumption	16
Table 8.	Specification for FORD 3000 Engine	19
Table 9.	Fuel Properties	29
Table 10.	Acceleration times for Toyota Landcruiser	44

APACE RESEARCH LTD.

REPORT ON

BLENDING OF ALCOHOL WITH DIESEL FUEL

An Evaluation of Diesel Engine Performance when Fuelled by
Surfactant Stabilised Hydrated Ethanol/Distillate Emulsions
containing Ignition Improving Additives.

FOR THE UNITED NATIONS INDUSTRIAL DEVELOPMENT ORGANISATION

PROJECT NUMBER : US/GLO/83/039

First submitted

JULY 1985

Corrected and revised

OCTOBER 1985

R. R. REEVES AND E. J. LOM

EXECUTIVE SUMMARY.

=====

ALCOHOLS AS FUELS FOR UNMODIFIED DIESEL ENGINES

- * The use of alcohols as extenders of gasoline fuels has led to significant implementation of "gasohol" in several countries (e.g. Brazil).
- * The ratio of distillate to gasoline usage in developing countries is such that an extender for distillate is far more necessary than an extender for gasoline.
- * Distillate is an income producing fuel having a vital role to play in the agricultural, goods and product transportation and industrial sectors thus further strengthening the need for a suitable extender.
- * A number of countries have surplus ethanol or the capacity to produce ethanol and could significantly achieve foreign exchange savings from substituting domestically produced ethanol for imported crude oil or refined distillate.
- * Ethanol production for fuel is labour rather than capital intensive and provides real opportunity for effective decentralisation in developed nations and a strong base for third world countries.
- * While the technology for mixing hydrated ethanol with gasoline is relatively straightforward, in the past it has not been possible to produce an economical stable blend of hydrated ethanol and distillate, i.e. "diesohol".
- * Apace Research Ltd. has developed an effective distillate/alcohol emulsifier technology that, for the first time, enables the practical and economical blending of hydrated alcohols (both ethanol and methanol) with distillate and the use of these diesohols in existing, unmodified diesel engines.
- * The level of ethanol substitution that can be readily achieved is:
 - 15% ethanol - No engine modifications or ignition improver required.
 - 25% ethanol - No engine modification required, fuel and/or timing re-adjustment may be desirable. Ignition improver required.
 - 30% ethanol - No engine modification needed in majority of cases, however some fuel injection equipment may require modification. In some cases new fuel injection equipment will be required leading to possible engine changes.

Ethanol substitution in excess of 30% is not recommended for unmodified existing diesel engines.

At the 15% substitution level rapid and flexible implementation of a diesohol technology is possible and can be followed by the gradual introduction of higher substitution levels.

- * Patents have been granted for the technology in five countries, including the United States and Australia, and further patent applications are pending in 30 other countries.
- * Agreements have been made with two major international companies - Albright & Wilson Limited and Shell Internationale Research Maatschappij B.V. (Shell).

Albright & Wilson has been granted a world-wide non-exclusive licence to produce and market the Apace emulsifier and diesohols.

Shell has been granted a world-wide licence to undertake a research and development programme covering optimisation of diesohols.

Shell has also been granted the right of first refusal to the second world-wide non-exclusive licence to commercially produce and market the Apace emulsifier and diesohols.

ABSTRACT

=====

The thermodynamic performance of a FORD 3000 diesel engine was evaluated on an engine test bed using stable ethanol/distillate emulsions containing varying proportions of different ignition improvers. Additionally a limited road test using a Toyota Landcruiser was also performed.

It has been previously shown that increasing the alcohol content of an alcohol/distillate blend (including emulsion) decreases both the ignition quality (cetane number) and the calorific value of such a blend. In a diesel engine the effect of the former leads to knock or quench but can increase the thermal efficiency, while the latter results in a power drop.

Previous tests and subsequent discussions with major engine manufacturers have indicated that an ethanol/distillate emulsion containing 20% by volume ethanol without ignition improving additives is extremely marginal as far as ignition delay and knock are concerned. In fact engine manufacturers would not approve the use of an emulsion containing in excess of 15% v/v ethanol without ignition improving additives.

The purpose of this project was to evaluate ignition improving additives of two types, one which enhances the ignition quality of the continuous distillate phase, the other affecting only the dispersed alcohol phase. Also investigated was the effect of variations in injection timing and establishment of the optimum timing for an ethanol emulsion.

The results obtained have shown that the alcohol compatible ignition improver Triethyleneglycoldinitrate (TEGDN) is extremely effective in reducing ignition delay and knock throughout the engine speed and load range. The cold starting characteristics of the Toyota Landcruiser were also substantially enhanced. The quantity required was only 75% of that recommended by the supplier for use with ethanol as the sole fuel in diesel engines and it may be beneficial to reduce this quantity even further in order to achieve improved thermal efficiency.

The timing changes showed that as far as engine performance was concerned there was minimal difference between the distillate and emulsion containing TEGDN in terms of power, thermal efficiency, ignition delay and combustion pressure characteristics. Retarding the timing improved the performance of the engine on both fuels. There was however a dramatic increase in observed smoke on distillate with retarded timing which was not evident on the ethanol/ distillate emulsion.

It should be noted that most engine manufacturers set the timing slightly advanced and sacrifice some performance for smoke free exhaust. The timing using the emulsion could therefore be set to the optimum and some of the loss of performance due to the lower calorific value regained.

ETHANOL/DISTILLATE EMULSIFIED BLENDS IN DIESEL ENGINES.
=====

An Evaluation of Diesel Engine Performance when Fuelled by Surfactant Stabilised Hydrated Ethanol/Distillate Emulsions containing Ignition Improving Additives.

1. INTRODUCTION

Apac Research Ltd. (A.R.L.) is a non profit company concerned with the research and development of renewable energy technologies mainly in the biomass sector. It is especially involved in the production and application of alcohols with emphasis on fuels for diesel engines. The company competes for research funds from governments and the private sector and in addition has a capacity for internally funded research in these and other areas.

A large proportion of the R.& D. as well as marketing effort of A.R.L. to date has been directed towards developing energy efficient means of production and utilisation of the alcohols, ethanol and methanol. The reasons for encouraging the implementation of fuel alcohol industries/utilisation include :

- * Concern over guarantee of supply of distillate and it's cost.
- * Alcohol production is strongly linked to the agricultural base. Because of economic limitations imposed by the transport of large quantities of biomass feedstock, alcohol for fuel production is effectively a labour intensive industry and provides real opportunity for effective decentralisation in developed nations and a strong base for third world countries.
- * Compared to coal and oil shale conversion to synthetic hydrocarbon fractions, alcohol production is not capital intensive. Furthermore, in the case of methanol produced from non-renewable resources, i.e. natural gas or coal, it's cost is already competitive with petroleum based fuels. Methanol is also available as a by-product from coal or natural gas to synthetic gasoline processes, for example Sasol and Mobil processes respectively, and hence could readily be utilised as both a gasoline and distillate extender.
- * When produced from biomass, fuel alcohol does not result in cumulative increase of atmospheric carbon dioxide.
- * In order to avoid competition for land for food production, more effective land utilisation and the development of integrated, multi-purpose agriculture and horticulture will be encouraged.
- * In a broad view, alcohol is a valuable feedstock for the chemical industry generally.

In the applied sense, the research effort of A.R.L. has been directed towards resolving three major criticisms of the fuel alcohol industry. These are :

- * The absence of a cost and performance effective method of using alcohols in diesel engines.
- * In relation to ethanol for fuel, the high processing energy requirement of conventional technology, in particular that of distillation, often results in an overall negative energy balance for the fuel.
- * The lack of a low cost and effective waste treatment process for fermented biomass.

While patent applications have resulted from work in all three areas the main marketing effort to date has concerned the A.R.L. technology for extension of distillate with alcohols. That technology also constitutes the subject of the UNIDO funded project reported here.

2. EXTENSION OF DIESEL FUELS WITH ALCOHOLS

2.1 Background.

Since even hydrated methanol or ethanol are easily made miscible with gasoline, such blends received world-wide attention and in several countries significant "gasohol" programmes are under way.

However, because of a number of hitherto technical difficulties, the widespread use of alcohols in diesel engines has not been realised. This has created impediments to future fuel alcohol industries in a number of ways :

Studies on the economic feasibility of alcohol fuels have been limited to considering the use of alcohols in the gasoline market only.

Because of increasing demand for distillate world-wide, and because of the relatively inflexible ratio of gasoline to distillate in the refining operation, cracking to satisfy distillate demand results in gasoline surplus or lower quality distillate. If alcohol substitution occurs only in the gasoline market the refinery balance is further aggravated.

Since the great bulk of fuel consumed by income producing activity is distillate, alcohols have, by default given added importance to other alternatives exclusively for distillate, such as esterified vegetable/ animal oils/fats.

However it should be recognised and stressed that for the gasoline and distillate markets a common extender for either market as the situation demands is highly desirable.

A.R.L. has developed a technology which enables the practical and economic blending of hydrated alcohols and distillate and the use of such blends in unmodified existing diesel engines.

The commercial value and importance of this inherently simple concept and technology lies in its potential benefits for a broad spectrum of interests :

At a national level, the direct substitution of domestically produced alcohols, from whatever source, for imported petroleum products, benefits through savings in foreign exchange. In this context it is also important to note that falling or low world crude oil prices can result in increasing domestic consumption, which can aggravate balance of payments, particularly for those countries heavily dependent on the importation of refined or crude petroleum products.

By allowing for a market to be created for methanol as a liquid transport fuel, the A.R.L. technology can give added incentives and markets for major coal and/or gas resource development projects which may be suffering a downturn in their more traditional markets.

Considering petroleum refining operations, even in the short term, indications are that critical problems of refinery balance and efficiency of operation will be encountered due to a rapidly increasing market demand for distillates and lead free gasolines, and the falling quality of crude cracking stock for their production. The ability to offset this trend by the substitution of alcohols for distillates is thus of considerable significance and value to refinery practice. Further the ability to extend the automotive distillate market sector with alcohol may allow the refineries to produce more aviation turbine fuel without greatly upsetting the gasoline-distillate balance at the refinery. Alternately, should the local demand and refinery practice be such that the shortage is in the gasoline rather than the distillate sector then "gasohol" can be easily produced.

2.2 Technology Description and Research and Development Rationale.

Opportunities to use methanol or ethanol directly as distillate extenders, as opposed to their indirect use in esterified vegetable oils, continue to arise on both local and national levels as a reflection of changing socio-economic circumstances, and out of foreign exchange savings considerations.

At the present stage of implementation of alternative fuels however, such opportunities, and the optimum level of alcohol substitution are often the subject of particular sets of circumstances which in themselves are subject to change.

Thus, maximum flexibility in the level of alcohol substitution is an important consideration when assessing the known methods of achieving alcohol substitution in existing diesel engines in particular.

In general terms, the current methods of achieving alcohol substitution in diesel engines involve modification of the fuel to suit the engine, modification of the engine to suit the fuel, or a combination of both. The methods are conveniently summarised in Table 1. (Page 9)

Alcohol cannot be used as the fuel in compression ignition (diesel) engines because the high self ignition temperature and high latent heat of vaporisation result in unacceptable ignition delay leading at best to severe knock and at worst quench (no ignition at all) without the use of ignition improvers. Changes are almost certainly required to the fuel injection system and lubricants need to be added to the alcohol.

However, when considering the introduction of alcohol extended transport fuels into the established infrastructure, blends to about 15% by volume of alcohol are usually of prime interest. As to the available choices of achieving at least this level of substitution, there is a choice of two approaches. These are -dual fuel systems or blended fuels.

In the dual fuel system, alcohol and distillate are kept in separate tanks and metered to the engine via separate arrangements. A control system is employed to limit the amount of alcohol admitted to the combustion chamber under those conditions where extended ignition delay would otherwise occur. Such systems have been shown to work, but the costs to retrofit existing engines are considerable, and there is the added complication of fuelling with two different fuels. Additionally the resale value of such vehicles can be substantially reduced if on resale it is moved to an area where no alcohol is available as an extender.

The blended fuel approach incorporates modifying the fuel so that little or no modifications are required to the engine or fuel injection equipment. From the user point of view this is by far the best approach.

Further, in relation to strategy and programme for the introduction of fuel alcohols into the established transport infrastructure it should also be noted that an advantage of the blended fuel approach is that the successful use in engines of blends containing in excess of 15% by volume alcohol requires the incremental addition to such blends of a suitable ignition improver with possible progressive fuel injection equipment and engine adjustments or modifications.

Thus in this way, with existing diesel engine population, the blended fuel approach allows for progressively higher levels of alcohol substitution coincident with alcohol availability, while still retaining a high degree of flexibility in relation to engine fuelling.

The obvious starting point for the blended fuel approach is to mix hydrated alcohol and distillate together in one tank and then assess engine performance when running on the mix.

Unfortunately, although strictly anhydrous ethanol and distillate are miscible at high temperatures, the presence of even 0.05%(v%) water in the mixture causes phase separation. Since even so called "anhydrous alcohol" often contains at least 0.5% (v%) water it is virtually impossible to obtain a homogeneous mixture of ethanol and distillate. Further even strictly anhydrous methanol is immiscible with distillate.

One method of overcoming this problem is to form an emulsion of the ternary system alcohol/distillate/water by use of chemical emulsifiers.

To this end A.R.L. has developed a new surfactant for producing emulsions of such ternary systems which in addition to producing long term stable emulsions is also economical in use and environmentally acceptable. It also exhibits compatibility with distillate only operation and high tolerance to water ingress.

The precise composition of the surfactant is still proprietary but it essentially consists of a mixture of a poly(ethyleneglycol-styrene) copolymer and a poly(butadiene-styrene) copolymer. Thus only the elements carbon, hydrogen and oxygen are present.

In terms of physical chemistry of the emulsions, there are two types:

Alcohol/water as the dispersed phase in a continuous phase of distillate, termed EW/D,

Distillate as the dispersed phase in a continuous phase of alcohol/water, termed D/EW.

The preferred type for a number of reasons is the EW/D type.

The structure of the emulsions also allows other additives, such as ignition or combustion improvers, which are compatible with either the distillate or the alcohol phases to be incorporated into the emulsions. This broadens considerably the range of additives available.

General criteria used in the development of A.R.L. "diesohols" are on two fronts, commercial and physical, as follows.

Table 1. COMPARISON OF CURRENTLY AVAILABLE METHODS FOR ACHIEVING SUBSTITUTION IN EXISTING DIESEL ENGINES

		% ALCOHOL SUBSTITUTION										
		0	10	20	30	40	50	60	70	80	90	100
<u>BLENDING FUEL APPROACH</u> (Modification of alcohol fuel to suit the existing diesel engines)	<u>DALCO CHEMICAL EMULSION</u>	<u>DALCO CHEMICAL EMULSION PLUS IGNITION/CETANE IMPROVER</u>										
	Low cost, Unmodified engines, Compatible with diesel only engine operation. Water tolerant	Increasing engine modification required Decreasing compatibility with diesel only operation Increasing engine development costs Water tolerant over whole range										
<u>DUAL FUEL AND MECHANICAL MODIFICATION APPROACH</u> (Modification of existing diesel engines to suit alcohol fuel)	<u>MECHANICAL EMULSION</u>	<u>MECHANICAL EMULSION PLUS IGNITION/CETANE IMPROVER</u>										
	Installation needs comprehensive mods to fuel system. High installation costs.	As for chemical emulsion plus ignition/cetane improver Complication of fuelling with two different fuels										
	<u>ASPIRATION</u>											
	Complicated engine and fuel injection equipment modifications required. Can be compatible with diesel only operation. High engine development costs. Complications of fuelling with two different fuels.											
	<u>DUAL INJECTION</u>											
As for aspiration, at greater cost but gives superior performance. Alcohol fuel may require lubricant additive.												
<u>SPARK IGNITION SYSTEMS</u>												
Not compatible with diesel only engine operation. Fuel may require lubricant additive. High engine development costs. →												

2.3 Commercial suitability criteria:

- To enable the use of lower cost hydrated alcohols containing to at least 10% by volume water.
- The contribution to the cost of diesohols due to surfactant and its incorporation to be relatively insignificant. The A.R.L. method of preparation of diesohols is as follows:

A surfactant concentrate is prepared and then metered in the correct proportion with likewise metered quantities of distillate and hydrated alcohol and passed through an in-line, high shear mixer or low pressure ultrasonic homogeniser to achieve a dispersion of hydrated alcohol in distillate.

- Total surfactant concentration to be less than 1% (w/v) (i.e. less than 10 grams per litre of blend).
- The raw materials for the manufacture of the compounds comprising the surfactant to be common, widely available and low cost.

2.4 Physical suitability criteria:

- On storage, which ensures minimum loss of ethanol by evaporation, stability towards phase separation to be in excess of 12 months.
- To be suitable for use in existing diesel engines and require no or minimal modifications to be made to the engine or fuel injection system. Also the EW/D type "diesohols" to be miscible with distillate in any proportion.
- An absolute viscosity not largely different from that of automotive distillate (2.5-3.5 centipoise @ 38 deg C).
- To be physically stable at high pressure and temperature. This is particularly relevant to the high volume of return line fuel which characterises particular types of fuel injection systems. Portion of such fuel has been subjected to the maximum operating pressure and temperature of the fuel prior to return to the fuel tank.
- Hydrated alcohols have poor lubricating qualities. An EW/D emulsion reduces the risk of increased corrosion/erosion of mechanical parts by hydrated alcohol.
- The surfactant not to adversely affect any mechanical components, lubricating oil, etc.
- The surfactant not to release unacceptable pollutants upon combustion.

3. PROJECT DESCRIPTION.

3.1 Project objectives.

This UNIDO funded project furthers the work already carried out by Apaco Research Ltd. to establish the feasibility of extending distillate fuel supplies by the addition of ethanol, especially in developing countries.

Prior work by Apaco was aimed at establishing the ethanol substitution level possible without the use of ignition improvers. It was concluded that, on the engines then tested, 20% substitution was the limit. Since then, however, further testing with different engines reduced this level to approx. 15%. This lower figure is more acceptable to engine manufacturers.

The objective of this project was to establish the maximum level of ethanol substitution possible, by the addition of suitable ignition improvers to emulsions to reduce the degree of knock and quench resulting from the use of ethanol in excess of 15%, without incurring high fuel or engine modification costs.

3.2 Project Work Program

- * Establish the effect of different types of ignition improvers on the thermodynamic performance of a suitably instrumented diesel engine (specifically a FORD 3000) mounted on a test bed and connected to a dynamometer.
- * Establish the optimum injection timing for the emulsion fuels.
- * Establish the maximum economic level of alcohol substitution possible for existing unmodified diesel engines.
- * Perform chassis dynamometer testing and road trials in a suitable vehicle.

3.3 Main Findings and Main Conclusions

Two commercially available ignition improvers were tested, one (Isooctyl nitrate (ION)) is already widely used to improve the ignition quality of distillate, and the other (Triethylene-glycoldinitrate (TEGDN)) is specifically formulated for use in diesel engines modified for 100% ethanol.

It was found that ION did not reduce ignition delay and knock to any great extent when used in the recommended quantities (0.2-0.4% of the emulsion) but projections show that somewhere around 0.8- 1.0% could give acceptable results in a 20% emulsion.

The product containing TEGDN supplied for evaluation, "Alcoolita", also contained dibutylphalate and diphenylamine as stabilisers (present to ensure product safety), castor oil, other lubricants and an anti-corrosive agent.

The quantity of TEGDN alone required for acceptable engine performance is 3.1% of the alcohol content of the emulsion. Therefore the percentage needed for, say, a 25% emulsion would constitute 0.78% of the total emulsion volume.

3.4 Diesel engine thermodynamic performance.

The assesment of engine thermodynamic performance was based mainly on the following criteria:

- * Maximum cylinder pressure
- * Maximum rate of change of cylinder pressure
- * Ignition delay i.e. the number of degrees of crankshaft rotation occurring between start of injection and start of combustion.

Torque, Power, Specific fuel consumption and Thermal efficiency are considered of secondary importance in this instance, however they were not ignored.

Maximum cylinder pressure.

The maximum pressure reached in a cylinder during combustion is mainly determined by the applied load and injection timing with the emulsion alcohol content having only minor effects. Table 2. shows this quite clearly where for example at 20 deg static timing the difference in cylinder pressure between the two extreme fuels (these being emulsion + 0.62% TEGDN and 20% ethanol emulsion) is only 1.2 bar at full load whereas a change in timing of six degrees causes a change in pressure obtained with distillate in excess of 6 bar. The effect of the different fuel type on engine cylinder pressure is more significant at lower applied loads but of course the pressures are also much lower. An example of "tailoring" the maximum cylinder pressures of an alcohol emulsion is also shown where almost identical cylinder pressures are achieved throughout the load range for distillate at 20 degrees and 25% ethanol emulsion containing 0.78% of TEGDN at 18 degrees static timing.

Maximum rate of change of cylinder pressure.

At any given engine speed this is dependent on

- * Ignition quality of the fuel
- * Dynamic injection timing
- * Applied load

and is probably the most important of the thermodynamic criteria. Too high a rate can result in a destructive knock condition whereas too low a rate will lead to an inefficient thermodynamic cycle.

Table 3 shows the relationship between the various factors. The inter-relationship is quite complex. In the example selected a 12 degree change in timing changes the rate from 19.1 to 11 bar/deg under full load conditions on distillate which is equivalent to a reduction of 42.6%. A load change from full load to 1/3 load at 20 deg using the same fuel reduces the rate by 47%. The highest rates of pressure rise are obtained using the E20 emulsion with no ignition improvers. The addition of TEGDN to the 20% emulsion has the effect of modifying the ignition quality, as far as rate of pressure rise is concerned, to being almost equivalent to that of distillate. The E25/TEGDN at 18 deg BTDC exhibits a lower rate of pressure rise at full load, however part load match with distillate at 20 deg is very close.

TABLE 2. Maximum cylinder pressure (bar)

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	89.8	88.6	96.2	97.1	95.9	103	102	96.9
2/3	66.8	69.6	75.4	78.8	76.7	85	85	75
1/3	56.6	51.6	61.4	65.3	60.5	67	66	61

Notes: Static timing is expressed in degrees BTDC.

DIST = 100% automotive distillate

E20 = Emulsion containing 20% v/v hydrated ethanol and no ignition improvers.

TEGDN= Emulsion containing 20% v/v hydrated ethanol where the alcohol contains 3.1% TEGDN.

E25/TEGDN= Emulsion containing 25% v/v hydrated ethanol where the alcohol contains 3.1% TEGDN.

LOAD = These are nominal loads only and FULL, 2/3 and 1/3 are for identification only, however part loads are identical for all fuels. Thus 2/3 load is the same for any speed, fuel or timing test condition.

Results apply to an engine speed of 1400 rpm.

TABLE 3. Maximum rate of cylinder pressure rise (bar/deg)

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	11	10.8	15.7	22.2	15	19.1	20.2	14.2
2/3	8.2	8.3	10.7	13.7	9.9	14.1	14.5	11
1/3	6.8	4.5	8.3	10.2	6.9	9.6	8.9	7.2

Notes: As per Table 2.

Ignition delay.

There is a tendency by most other researchers into thermodynamic behaviour to express the ignition delay in terms of time only, this being taken from the point of commencement of injection (as determined by needle lift diagrams) and commencement of combustion (determined by the inflection of the cylinder pressure curve). Although the Apaca equipment has the ability to determine these times, we believe that the sensitivity of the delay expressed in terms of degrees is greater than in terms of time alone. Thus the results on which decisions can be made have been based on the degree mode.

As Table 4 shows the ignition delay is mainly affected by injection timing (over the 12 degree range). The load has very little effect at more retarded timings, but has a significant effect at the more advanced timings. The ignition quality of the fuel also has a major bearing on the ignition delay.

TABLE 4. Ignition delay (Crank angle degrees).

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	8	7.8	10.1	11.6	9.7	12.4	12.0	8.8
2/3	8	8	8.9	10.4	8.8	10.9	10.4	8.5
1/3	8.4	8.8	9.2	9.8	8.1	10.8	9.2	8.3

Notes: As per Table 2.

On the basis of the results presented in Tables 2,3 and 4 it can be seen why 18 deg timing was chosen for the E25/TEGDN emulsion to achieve similar power output to the 20 deg distillate timing. Table 5 shows the torque (and hence the power) attained under the various conditions. Although the calorific value of the E25/TEGDN emulsion is reduced to 37.66MJ/kg from 42.75MJ/kg for distillate (an 11.9% drop) the torque is actually decreased by only 3.2% (This is fairly typical throughout the speed range). Similar results can be applied to the TEGDN emulsion(20% v/v ethanol where the alcohol contains 3.1% of TEGDN) and 14 deg timing where the reduction is even less.

It should be noted that because of smoke emissions the engine could not be operated normally at 14 deg static timing on distillate and therefore comparison must be made to the 20 deg timing. The emulsions are reasonably smoke free at the retarded conditions and could be operated at the 14 deg setting.

TABLE 5. Observed engine torque (NM)

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	166	159	160	148	152	142	142	155

Notes: As per Table 2.

Thermal efficiency.

The thermal efficiency is dependent in the main on the start of combustion, rate of pressure rise and the completeness of combustion. The most efficient heat cycle is the constant volume cycle and the closer the approach to this ideal the higher the thermal efficiency. That an emulsion containing no ignition improvers (such as the listed E20) should exhibit higher thermal efficiency can be readily explained by the first two factors i.e. later start of combustion and higher rate of pressure rise. The same cannot be stated for the E20 emulsion containing TEGDN and thus any efficiency improvement must be attributed to improved combustion.

Table 6. sets out the efficiencies obtained under the various conditions and it can be discerned that again injection timing plays a significant role as does the fuel type. The typical characteristic indicating that the highest efficiency is obtained somewhere between 55 and 80% of full load is also very much in evidence under all conditions.

TABLE 6. Thermal efficiency (%)

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	27.4	29.2	26.5	27.6	27.5	23.4	25.8	28.5
2/3	30	30.5	29.7	29.3	29.4	27.9	28.3	29.6
1/3	20.4	20.2	21.5	20.6	20.1	19.2	20.4	20.4

Notes: As per Table 2.

Specific fuel consumption.

The thermal efficiency of the engine heat cycle and calorific value of the fuel determine the specific fuel consumption. Table 7. lists the values of the specific fuel consumptions obtained and the interaction of efficiency and calorific values observed. Thus it can be seen that 100% distillate because of its high calorific value tends to exhibit the lowest specific

fuel consumption even when its efficiency is low compared to the emulsions. Where the efficiencies between the fuels are similar (as at part loads) then specific fuel consumption must increase in direct relationship to the calorific value of the fuel. This is further adversely compounded by the density of the fuel as most operators use volumetric instead of gravimetric fuel consumption criteria.

TABLE 7. Brake specific fuel consumption. (BSFC gms/KW/hr)

STATIC TIMING	14 deg		20 deg			26 deg		18 deg
	DIST	TEGDN	DIST	E20	TEGDN	DIST	TEGDN	E25/TEGDN
Full	307	319	289	336	338	360	361	335
2/3	281	306	281	317	317	301	329	323
1/3	412	462	410	450	464	439	456	470

Notes: As per Table 2.

Toyota Landcruiser experience.

The Toyota vehicle fitted with a 6 cylinder H series indirect injection engine was down on power when operated on a 20% ethanol emulsion containing .62% v/v TEGDN. The power could be readily restored by fuel rack adjustment only, rather than carrying out timing alterations. This would, obviously, increase the fuel consumption to compensate for the reduced calorific value of the fuel.

Observations made of the cold starting ability indicated that cold starting was much easier using the emulsion fuel with ignition improver than with distillate. Apart from the fact that the glow plugs needed to be used for a shorter period there was an almost total lack of cold start "crackle" (knock) and black smoke from the start-up excess fuel.

Driving the vehicle normally on the road did not reveal any necessity for re-establishing the power output, the engine operated smoothly throughout the load and speed range. At no time was any black smoke emitted.

3.5 Conclusions on the results obtained

It would be inappropriate to make any firm recommendations based on the results obtained. However it can be stated with reasonable confidence that 20%, probably 25% in the vast majority of cases and in certain applications (such as large stationary or railway engines) even 30% ethanol substitution can be achieved.

The scenarios envisaged are :

- * 15% ethanol substitution- No engine modifications and no ignition improver required.
- * 20% ethanol substitution- No engine modifications required, but some fuel delivery or timing changes may be required. Ignition improver required.
- * 25% ethanol substitution- No engine modifications required in majority of cases, but fuel delivery and/or timing changes will be required. Ignition improver required.
- * 30% ethanol substitution- No engine modifications required in majority of cases however some fuel injection equipment may need to be modified. In extreme cases new fuel injection equipment will be required leading to possible engine changes. Ignition improver required.
- * Ethanol substitution in excess of 30% would not be recommended as fuel injection equipment modifications would be required in virtually all cases. The ethanol/distillate emulsion may also require lubricant in addition to ignition improver and emulsifier.

4. POTENTIAL FOR INDUSTRIAL/COMMERCIAL APPLICATION.

The apparent stability and oversupply of crude oil existing at present would seem to indicate that the emulsion technology would have limited application. However the quality of the available crude is dropping rapidly and the need for additional cracking and refining for the lead-free gasoline market as well as the demand for high grade (and highly profitable) aviation kerosene is eroding that part of the barrel generally sourcing the automotive type distillate. There is already evidence of quite serious down-grading in terms of the ignition quality of automotive distillate which is being boosted by the addition of ignition improvers. To this state of affairs must be added the plight of the alcohol (either ethanol or methanol), sugar and starch producers which is causing a serious glut of alcohol in the market place. This situation will not be improved when the Middle East mega-litre methanol plants come on stream in the near future.

Distillate can be considered as an income producing product having a vital role to play in the agricultural, industrial and goods/product transportation sectors. This is especially true in developing countries where the ratio of distillate to gasoline consumption is high. The cost of distillate to these countries is very high (at the time of writing the strength of the American dollar was having a significant effect on these costs) and thus the introduction of emulsions incorporating indigenously produced alcohol could alleviate balance of payment problems.

It is the opinion of the authors that there are a number of countries at present where socio-economic conditions are such that great benefits would accrue rapidly from the introduction of the emulsion technology.

Apac Research Ltd. has filed complete patent specifications relating to the emulsion technology in the following countries.

Australia	U.S.A.	Europe
Argentina	Colombia	designating
Mexico	Chile	Austria
Norway	India	Belgium
South Africa	Mauritius	France
Israel	New Zealand	Germany
Japan	Taiwan	Italy
Philippines	Sri Lanka	Liechtenstein
Indonesia	Nigeria	Luxembourg
Canada	Pakistan	Netherlands
Brazil	South Korea	Sweden
Venezuela	Thailand	Switzerland
Turkey		United Kingdom

with confirmation applications to be filed in:

Kenya
Malaysia
Singapore
Fiji

Negotiations in relation to licensing the technology have culminated in the granting of a world-wide non-exclusive licence to Albright and Wilson Ltd.(UK), a major international chemical company, to manufacture, use and sell the emulsifier and the emulsions.

The right of first refusal for the second such licence has been granted to Shell (Netherlands).

Governments and/or organisations interested in implementing the technology should contact either or both of these organisations.

5. ENGINE PERFORMANCE TESTS.

5.1 TEST ENGINES.

All preliminary test work to establish the effect of the selected ignition improvers was conducted on a Ford 3000 engine located in the Engineering Department at Hawkesbury Agricultural College.

This engine was considered to be suitable for this type of work for a number of reasons, the main ones being:

a. It was used on previous methanol projects and has proved itself tolerant to a considerable degree of abuse (i.e. knock).

b. A complete engine is available as a spare, including Fuel Injection Pumps and Injectors. Spare parts are available locally at reasonable cost.

c. The combustion chamber is not state of the art design and thus should be relatively sensitive to fuel quality. A bore to stroke ratio of 1:1 is used and cylinder volume is around the 1 litre capacity. Max governed speed is 2200 r.p.m. although 2000 r.p.m. was considered more suitable for the tests. A full specification for this engine is listed in Table 8.

Table 8.

Specification for Ford 3000 Test Engine.

Make	Ford
Model	3000
Type	4 stroke, direct injection, naturally aspirated.
No. of cyl.	3
Bore	106.7 mm (4.2")
Stroke	106.7 mm (4.2")
Displacement	2860 cc (174.5 cis)
Comp. Ratio	16.5:1
Firing Order	123
Max. No Load Speed	2175-2225 r.p.m.
Idle Speed	600-700 r.p.m.
Compression pressure @ 1000 r.p.m.	38 bar (550 p.s.i.)
Injection Timing	The injection timing was arbitrarily set to 20 deg B.T.D.C.
Injection Pump	D.P.A. 3233F161
Injector Nozzle	BDLL150S6443
Opening Pressure	185 atm

5.2 ENGINE TEST EQUIPMENT AND MEASURING METHODS.

The equipment used for this project comprised a combination of conventional test equipment used by many other research establishments for this type of work and equipment designed by Apace Research Ltd. to enhance the measuring techniques.

Typical equipment and methods for the measurement of engine parameters consist of :

- (1) Manual reading and recording of fairly stable test parameters such as :
 - a. Dynamometer load
 - b. Engine speed
 - c. Fuel consumption
 - d. Various engine and dynamometer temperatures

- (2) Recording of cylinder pressures and needle lift by means of an oscilloscope and Polaroid photography. In a number of more advanced engine test facilities ignition delay is measured by means of an ignition delay meter, although this requires a degree of skill on the part of the engine tester.

It should be noted however that more advanced systems are being installed utilising such items as digital storage oscilloscopes, F.F.T. analysers and computer aquisition systems.

The investigation of the effects of different fuels having widely differing ignition characteristics is hampered by the existing manual methods leading to considerable inaccuracies and slow analysis and interpretation.

The equipment and methods used by Apace Research Ltd. for the aquisition of all engine parameters are completely computer based and are believed to offer a degree of accuracy of results not possible with conventional or indeed other methods under development.

The following is a brief description of the equipment and methods used :

- (1) HEENAN and FROUDE Type G Hydraulic Dynamometer modified for electrical readout of applied load. The dynamometer is still however manually operated.

- (2) Fuel consumption measurement is mass based and comprises a Mettler PE3000 electronic balance equipped with a 2400 baud serial interface. Fuel flow to the weighed fuel container is controlled by a solenoid valve under instruction from the computer. An electric pump delivers the fuel to the engine.
- (3) A Kistler Type 6123 Piezo-electric pressure transducer coupled with Type 5041 charge amplifier is used to convert the cylinder pressure into an appropriate electrical signal. Great care had been taken with the installation of this transducer in the cylinder head, mounted vertically with the diaphragm flush with the cylinder head face and well within the piston bowl periphery. It is mounted within a separate tube and a degree of installation compliance has been built in. This is to reduce cylinder head transmitted vibration to the pressure transducer.
- (4) The Injector needle lift is measured by means of a C.A.V. Type 1368 FM system consisting of :
 - a. Inductive measuring coil which detects the movement of the aluminium extension attached to the injector push rod.
 - b. Oscillator
 - . Demodulator/amplifier/filter.The measuring system produces a voltage proportional to the needle lift.
- (5) Heated air is supplied to the engine from an airbox fitted with a thermostatically controlled heater and recirculating fan. The airbox has a volume of approximately 2 cubic metres and air is drawn out of it at a rate dependant on engine demand.
- (6) Thermocouples are used to measure temperatures of:
 - a. Engine cooling water inlet
 - b. Engine cooling water outlet
 - c. Sump oil
 - d. Fuel oil inlet
 - e. Air inlet 150mm prior to the inlet manifold
 - f. Air box
 - g. Exhaust gas approximately .5m downstream of the manifold.
 - h. Cooling tower water in
 - i. Cooling tower water out.

- (7) The data acquisition and instrument system is under the control of a Hewlett-Packard 86B computer complete with disc drives, HP-IB, RS232 and GP-IO interfaces. Additionally the memory has been expanded to 256k and I/O and Advanced Programming enhancement ROMs have been installed. Although it was not considered an ideal machine for the application it proved adequate in the majority of respects. It's main drawback is the slow Basic operating system. With the time limitations imposed on us by the delays to complete the project it was not considered worthwhile to re-write the programme in machine language.
- (8) Equipment described above is conventional in nature, however in order to make the best use of it, it was necessary to design and build a special interface. The interface is based on the S100 bus and briefly consists of :
- a. 16 bit address bus
 - b. 16 bit data bus
 - c. 4 1/2 digit A-D converter is used for the measurement of all slow changing signals such as thermocouples with a maximum conversion speed of 330mS. A demultiplexer allows differential signals to be steered to the converter via a differential instrumentation amplifier. The BCD coded output of the converter is hardware translated to binary code.
 - d. A 12 bit A-D converter is employed to convert the voltage produced by the Cylinder pressure charge amplifier to offset binary code. This is then placed into a memory location determined by crankshaft position and specified measurement parameters. A sample hold amplifier at the input of the A-D converter ensures accuracy of the signal. The conversion rate is in the region of 25 micro-seconds.
 - e. An 8 bit A-D converter is used to convert the signals from the Needle lift amplifier to unipolar binary code and this is also stored in a specified memory location. Again a sample hold amplifier is placed at the input to the A-D converter to ensure data integrity. As the output is unipolar, an offset voltage is applied at the input so that only positive voltage is seen. The conversion rate is approximately 4 micro-seconds. It should be noted that a second 8 bit A-D converter together with sample hold and high gain instrumentation amplifier is installed for use with a fuel line pressure transducer.

- f. Five pre-settable down counters. Each counter has associated with it a data latch which can be directly addressed and loaded with data by the computer. The function of the five counters are :
- i. Number of measurement samples to be taken
 - ii. Measurement delay expressed as number of grads after bottom dead centre.
 - iii. Actual number of consecutive grads when cylinder pressure and needle lift are to be measured and stored in their respective memories.
 - iv. Cycles between consecutive measurements. It allows the selection of complete engine cycles (two revolutions) when no cylinder or needle lift are recorded.
 - v. Revolution counter which generates an interrupt signal to the computer that the specified number of revolutions has been completed.
- g. An up counter which measures actual engine revolutions and is under computer control. It is used to determine engine speed and fuel consumption.

All the counters are preset to their initial value (data in the latches for the down counters, zero for the up counter) by a trigger signal from the computer.

- h. Memories and memory management.
Each high speed A-D converter has it's own 4k of memory, 8 bit wide in the case of the needle lift and 12 bit wide in the case of the cylinder pressure. The memory address is accomplished by means of up-counters which are either addressed by engine crankshaft position sensors during the write cycle or by the computer during the read cycle. Again the counters are preset to their initial value (zero) by the trigger signal from the computer.
- i. Electronic switching is used for the RS232 signals so that single serial interface of the computer can be used for reading the fuel measurement system data or writing to a printer. Additional switching is also provided for the GP-IO interface to cater for a plotter drive.

- (9) In order to synchronise the acquisition of the high speed data i.e. cylinder pressure and needle lift with the combustion cycle, the crankshaft position must be monitored. This is achieved by means of a disc having 400 slots machined in its periphery, each slot corresponding to one grad. One of the slots is longer and corresponds to No1 crank being at bottom dead centre. Two infra red sensitive photo transistor/diode sensors coupled with Schmitt triggers sense the slots and output a square edged pulse each time a slot passes the detector. Thus one detector produces 400 pulses per crankshaft revolution while the other produces only one pulse at bottom dead centre per crankshaft revolution. A proximity type switch is installed near the camshaft gear which is fitted with a steel flag indicating whether the compression/expansion part or the exhaust/induction part of the combustion cycle is in progress.

The combination of the three sensors together with some counters can therefore determine the crankshaft position within a combustion cycle to within one grad. ($0.9 \text{ deg} = 1 \text{ grad}$)

The measurement methods are fairly simple and operate in a number of different modes. These are :

- (1) Idle mode.
In this mode the only measurements that are taken are the slow response ones i.e. temperatures, torque and engine speed. A complete measurement cycle takes approximately 10 seconds. This is useful for monitoring engine parameters for stabilisation and setting up for a more complete measurement mode. The computer always starts up in this mode and always reverts to it at the completion of any other mode. Exit from this mode to any other mode or function is accomplished by use of the special function keys. While in this mode it is also possible to alter all the measurement parameters such as grads delay, number of samples, number of revolutions for the fuel consumption measurement and number of grads to be read.
- (2) Beginning of injection mode.
The purpose of this mode is to acquire needle lift data during the latter part of the compression stroke and early part of the expansion stroke and calculate by the use of a suitable algorithm the dynamic starting point of injection. This allows for re-adjustment of the pump timing to obtain the required dynamic commencement of injection.

The programmed default parameters are :

- a. One sample only
- b. Grads delay set to 150 grads
- c. Grads measured set to 100 grads. These can, of course, be altered by entering the required data into the computer. This allows the study of either short term or long term changes in engine parameters by varying the sampling period.

(3) Ignition Delay.

This mode is identical to the Beginning of injection mode in all aspects but also includes the cylinder pressure data, number of revolutions and time taken to complete that number of revolutions. Once the data has been collected and commencement of injection calculated then another algorithm is used to determine the start of combustion from the cylinder pressure data. It is then a simple matter to establish the ignition delay from the time and number of revolutions both in terms of time and crank angle.

The additional default parameter is the number of revolutions and is set to 100. Again if higher accuracy or greater number of samples are required then this parameter can be easily re-specified.

When either the beginning of injection or this mode is specified an internal computer flag is set which enables, at the completion of the measuring cycle, for needle lift and cylinder pressure data to be graphically displayed on the computer monitor. Additionally the commencement of injection and combustion are marked together with grad marks and top dead centre.

(4) Full run.

This mode is selected when the engine has reached correct specified operating conditions such as

- a. Water temperature
- b. Oil temperature
- c. Air inlet temperature
- d. e.t.c

and the engine speed and load have been set and stabilised.

The following sequence takes place when this mode is entered :

- i. A quick check is made of the engine speed over 100 revolutions and stored.

- ii. A calculation is made how many readings of engine load and all temperatures (i.e. how many idle loop equivalents) can be made within 1000 revolutions at the speed obtained in (i.). This determines how many readings of these parameters will be taken during the full run. This figure is however deliberately limited to five and if necessary the computer will enter into a wait state to achieve equally spaced readings.
- iii. The fuel feed to the fuel measurement system is switched off and a wait period of five seconds initiated.
- iv. The counter latches are set up with test conditions, the default ones being:
 - a. Samples = 5
 - b. Delay ,grads = 10
 - c. Number of grads measured = 780
 - d. Number of cycles between samples = 89
 - e. Number of revolutions = 1000Note that the number of cycles between samples (89) + 1 sample = 90 so that a sample is taken every 90 engine cycles or 180 engine revolutions.
- v. The memory address counters are set to zero.
- vi. The RS232 port connected to the balance is selected and the buffer registers in the serial interface cleared. Two consecutive readings from the balance are read by the computer and the first one rejected, the timer is started and all counters loaded with data from their respective latches and enabled by common trigger signal. The interrupt from the down counter is also enabled.
At this point the Apace interface commences to collect data from the cylinder pressure, needle lift and (when available) fuel line pressure at every specified grad and storing the data in the relevant memory locations.
- vii. While the interface is collecting and storing the rapidly changing data the computer performs basically a number of idle loops as established in para. ii.
- viii. After the specified number of revolutions have been completed an interrupt is generated by the interface and the computer responds to this by checking that the balance RS232 port is still connected, clearing the serial interface buffer registers of accumulated data, again accepting two readings from the balance and rejecting the

first one. At this point it stops the revolutions up counter and reads the elapsed time from the start of the measurement cycle.

ix. The computer now restarts the fuel flow to the fuel consumption measuring system and commences the data transfer from the Apace interface memory into it's own memory. On completion of the data transfer internal flags are set to signify that the data is now ready to be tored on disc, displayed graphically on the monitor, selected data output to a printer or to a plotter .

The last two features were not utilised during this series of tests as vast quantities of data were collected and it was preferable to process the data in a less hostile environment.

x. The computer now re-initialises all setup parameters back to the idle loop conditions and restarts that loop.

The statistics of this type of data aquisition are quite surprising. Typically a single full run mode would produce in 1000 engine revolutions the following amount of information :

- * 3900 data points for needle lift
- * 3900 data points for cylinder pressure
- * 3900 data points for fuel line pressure(when available)
- * 5 applied load readings
- * 50 temperature readings (5 of each measured temperature)
- * 2 fuel mass readings (one at the commencement, the other at the end of the test run)
- * Elapsed time between the two fuel mass measurements
- * Number of engine revolutions occuring during the elapsed time.
- * Barometric pressure

Additional information that must be recorded includes such items as Test ID, Fuel ID, Fuel density, Fuel calorific value, Date, Record ID, Number of samples, Number of cycles between measurements, Grads delay, Number of grads measured, Engine specification, Dyno parameters and any comments.

In spite of virtually all information being stored in condensed form this still amounts to 16500 bytes per full run mode. The method selected for fuel evaluation requires 16 runs (3 different loads at 5 speeds and one idle condition) and thus 264,000 bytes of information have to be stored per single fuel.

Eight fuels have been evaluated during this project resulting in the collection of 3,696,000 bytes of information to be digested. It is rather fortunate that a large proportion of this information is not directly required, thus reducing the information to be processed to a much more manageable 500,000 bytes (approx).

5.3 TEST FUELS.

All the emulsions were prepared by Apace Research Ltd. from a common batch of Mobil distillate and C.S.R. Industrial Methylated Spirit.

The ignition improvers used were carefully selected from the literature, previous experience and private communications from other research organisations. Two ignition improvers were chosen for investigation, iso octyl nitrate (ION) for improving the ignition quality of the distillate phase and Triethyleneglycol-dinitrate (TEGDN) for improving the ignition quality of the ethanol phase of the emulsion.

Samples of ION were supplied by The Associated Octel Co. Ltd. (UK). It is also available from other organisations such as Ethyl Corporation who market ION under the trade name DII3. It is available worldwide at competitive prices.

The TEGDN used in the tests was obtained by Perkins Engines Ltd. on behalf of Apace Research Ltd. from Explo-Industrias Quimicas e Explosivos S.A. Brazil. The product containing TEGDN is marketed under the trade name of "Alcoolita". Alcoolita contains 60% ethyl alcohol, 32% TEGDN and the remaining 8% contains dibutylphalate, diphenylamine, castor oil, Maxlube, an anti-corrosive agent and other minor ingredients.

A blend of 13 parts of Alcoolita to 87 parts hydrated (96%) alcohol produces a fuel for use in specially adapted diesel engines. Thus the TEGDN content amounts to 32% of 13% which is equal to 4.16% of the total volume.

It is believed that the present production of TEGDN is in the order of 300 tonnes/month and can be readily expanded.

Initially five emulsions were prepared containing different amounts of ignition improver and their engine performance was compared with that of 100% distillate.

Based on the results obtained another two emulsions were prepared.

Table 9. shows the properties of the various fuels.

Table 9.
Fuel Properties.

Fuel Id.No	Dist. %	Eth. %	ION %	Density gm/cc	L.C.V. MJ/Kg
DIST 100	100			.849	42.75
E20	80	20		.845	38.83
E20/.2ION	79.8	20	.2	.845	38.83
E20/.4ION	79.6	20	.4	.845	38.83
			TEGDN		
E20/2.6TEGDN	80	19.48	0.416	.848	38.69
E20/5.2TEGDN	80	18.96	0.832	.850	38.55
E20/3.9TEGDN	80	19.22	0.624	.849	38.62
E25/3.9TEGDN	75	24.03	0.78	.848	37.66

NOTES.

1. Distillate was supplied by Mobil
2. "Ethanol" was Industrial Methylated Spirit supplied by CSR Ltd. and contains nominally 5% v/v of water. Its L.C.V. has been taken as 23.96 MJ/Kg.
3. The L.C.V. of TEGDN has been quoted as 13.2 MJ/Kg and the density taken as 1.338 gm/cc.
4. Densities shown in the table are those at 15 deg.C.
5. The surfactant is assumed to be part of the distillate.
6. Fuel identification.

For emulsions with ION the identification is simply expressed as the alcohol volume and ION volume in the emulsion. Thus E20/.2ION = 20% hydrated ethanol + 0.2% ION + 79.8% distillate.(% by volume)

For emulsions with TEGDN the identification is expressed as non-distillate volume and percentage of non-alcohol constituents of the non-distillate volume. Thus

E25/3.9TEGDN= 25% non distillate components + 75% distillate

where the 25% non distillate component comprises 21.1% hydrated ethanol + 3.9% non alcohol components

and the 3.9% non alcohol components comprise 3.12% TEGDN +

0.78% stabilisers, lubricants and anti-corrosive agents.

5.4 ENGINE MATRIX TESTS.

A test matrix of 16 load and speed conditions covering the entire engine range was carried out using each emulsion in addition to a distillate datum.

The matrix test conditions were :

3 loads.....Full load
 2/3 load (nominal)
 1/3 load (nominal)

5 speeds.....2000 rpm (nominal)
 1700 rpm (nominal)
 1400 rpm (nominal)
 1100 rpm (nominal)
 800 rpm (nominal)

An idle condition at 800rpm and minimum load.

At each matrix condition the following parameters were measured and recorded.

- * Engine speed
- * Dynamometer load (5 readings)
- * Nett fuel consumption (1 reading over 1000 + engine revolutions)
- * Air inlet temperature (5 readings)
- * Air box temperature (5 readings)
- * Exhaust temperature (5 readings)
- * Engine oil temperature (5 readings)
- * Cooling water in temperature (5 readings)
- * Cooling water out temperature (5 readings)
- * Fuel temperature at fuel pump inlet (5 readings)
- * Cooling tower water in temperature (5 readings)
- * Cooling tower water out temperature (5 readings)
- * Ambient/cold junction temperature (5 readings)
- * Needle lift and cylinder pressure readings at one grad intervals commencing at 190 grads BTDC on compression stroke and continuing for 780 grads. Five of the above cycles were repeated at intervals of 180 complete engine revolutions.

The method adopted for the aquisition of of all data for the various test fuels was as follows:

The engine was run at 1700 rpm and approximately 75% load until engine cooling water temperature was stabilised at about 80 deg C. outlet, 50 deg C inlet, sump oil temperature in excess of 80 deg C. and air inlet temperature of 30 deg C. When these parameters were reached a check of the dynamic performance was made by invoking the timing/delay measurement mode. If this was considered satisfactory then the full test matrix was carried out in the following order:

1. Full load -2000 rpm
-1700 rpm
-1400 rpm
-1100 rpm
- 800 rpm
2. 2/3 load -2000 rpm
-1700 rpm
-1400 rpm
-1100 rpm
- 800 rpm
3. 1/3 load -2000 rpm
-1700 rpm
-1400 rpm
-1100 rpm
- 800 rpm
4. Idle - 800 rpm

A check of all major parameters was made prior to executing full run mode at any matrix condition.

The engine remained unaltered for all tests with the exception of timing changes.

The methodology adopted was to compare 20% ethanol emulsion containing first guess quantities of ignition improvers to a 20% emulsion with no ignition improver, and 100% distillate. First guess quantities were 0.2% and 0.4% ION in the emulsion then 2.1% and 4.2% TEGDN in the alcohol phase of the emulsion. All of these fuels were tested at the static timing of 20 deg BTDC to establish the effect of the ignition improvers. From the results obtained the preferred ignition improver was selected together with its optimum required quantity for best thermodynamic engine performance.

The emulsion containing the required quantity of the preferred ignition improver was then compared to 100% distillate at various injection timing swings ranging from 6 deg (engine) retarded to 6 deg (engine) advanced in order to establish the optimum timing. Once the ignition improver, its quantity and the optimum timing were thus established an emulsion containing 25% ethanol plus ignition improver was prepared and compared to 100% distillate.

5.5 ENGINE MATRIX TEST RESULTS.

All engine test results are presented separately in:
Appendix 1., "Engine Results Curves", FIG AP1 to AP125
Appendix 2., "Engine Results Tables", Page 1 to 56

The results for torque, and its derivatives, shown in Appendix 1., have been corrected for atmospheric pressure only since the air inlet temperature was maintained relatively constant.

The engine results for torque (and power) shown in Appendix 2. have been corrected to standard conditions for atmospheric pressure and temperature as per Australian Standard "Method for Rating and Testing Internal Combustion Engines" AS 1501-1976 (100 kPa and 27 deg.C).

The most important criteria when assessing alternative fuels for diesel engines, especially fuels containing large percentages of single boiling point, high latent heat of vapourization, self ignition temperature liquids are ignition delay and rate of pressure rise.

The emphasis in this report (and indeed of the specialised instrumentation) is therefore directed to these aspects rather than the more conventional ones of torque, power, specific fuel consumption and thermal efficiency. These have not been ignored in the analysis, but the weighting given to them is less than would normally be the case.

Definitions of some of the terms used :

Three different loads have been used in the engine performance and these have been arbitrarily called Full load, 2/3 load and 1/3 load. The actual loads used are:

Full load- The maximum load that can be applied to the engine at any particular engine speed. This is dictated by the fuel delivery, fuel calorific value and thermal efficiency.

2/3 load-This is a load of 11.22 N (2.5 lbf) or torque of 89 NM. applied at any speed.

1/3 load-This is a load of 4.49 N (1.0 lbf) or torque of 35.6 NM applied at any speed.

Engine speeds quoted for comparison purposes are nominal engine speeds. There can be a variation of upto 50 rpm between the nominal and actual speeds. Actual speeds are used in all calculations and graphs.

(a) Commencement of Injection and Combustion, Max. Cylinder Pressure and Max. Rate of Pressure.

FIG AP1 to AP24 show the needle lift and cylinder pressure diagrams obtained on the initial fuels tested. These were:

* Distillate	FIG AP1	-AP4
* E20	FIG AP5	-AP8
* E20/2.6TEGDN	FIG AP9	-AP12
* E20/5.2TEGDN	FIG AP13	-AP16
* E20/.2ION	FIG AP17	-AP20
* E20/.4ION	FIG AP21	-AP24

These diagrams show the repeatability of the needle lift and cylinder pressure taken every 360 engine revolutions (Note that while five actual readings were taken every 130 engine revolutions, only the first, third and fifth readings are plotted). The table of results at the right hand side of each of the diagrams gives the average of the FIVE readings.

Typically the needle lift is repeatable at higher speeds and variable at the low speed, low delivery (i.e. idle) conditions. Please note that only the commencement of needle lift is taken into consideration and not vertical separation (which is to some extent influenced by the self tuning characteristics of the transducer system used). Considerable changes in needle lift, for example FIG AP8, indicate fuel delivery variations resulting in significant changes in combustion characteristics. This would be expected for the CAV DPA pump which exhibits a variable commencement of injection with load. This coupled with metering being accomplished by throttling leads to substantial changes in the amount of fuel injected and dynamic timing. The effect is particularly evident on three cylinder engines.

TEGDN emulsion fuels.

FIG AP25 -AP27 compare max. cylinder pressure, max. rate of cylinder pressure, start of injection and start of combustion of emulsions containing TEGDN with 100% distillate and E20 at different speeds and loads.

At full load there is virtually no difference in max. pressure with any of the fuels. At part loads the percentage difference is greater but the actual pressures are reasonably close between the fuels.

The start of injection at full and 2/3 loads within the 800 to 2000 rpm speed range is almost completely independent of the emulsion used. 100% distillate shows a departure from the other fuels only at 800 rpm exhibiting 2 deg of retard.

At 1/3 load there is a considerable change in the dynamic timing at 1400 rpm for the two fuels containing TEGDN ignition improver. Apart from this point the behaviour of 100% distillate and the emulsions follow the same pattern as at full and 2/3 load conditions.

At this stage there is no reasonable explanation for this phenomena. It certainly is not due to incorrect data acquisition as the max. pressure and max. pressure rate follow suit.

The change in the start of injection at 800 rpm can most probably be attributed to the advance device fitted to this pump which is load, viscosity and fuel bulk modulus sensitive. Its highest sensitivity would lie at the lower speeds where the transfer pressure is also most fuel viscosity sensitive.

The start of combustion at full and 2/3 load, again within the 1100 to 2000 rpm range, is fairly consistent with the 100% distillate and the two emulsions containing TEGDN. The E20 emulsion shows a considerable change in the start of combustion being much later than the other three fuels. Although the 1/3 load appears to be somewhat haphazard, careful study shows that similar conclusions can be drawn, although they are not as obvious when compared to the other conditions.

The max. rate of pressure is most certainly affected by fuel type. The worst (i.e. one exhibiting the highest rate) being the E20 emulsion and the best being the E20/5.2 TEGDN emulsion. The difference is most obvious under full load conditions at the higher speeds. At 2/3 and 1/3 load the difference between 100% distillate and the two emulsions containing TEGDN is much reduced.

FIG AP31 to AP33 show the effect of load at various speeds when using emulsions containing TEGDN compared with E20 emulsion and 100% distillate.

FIG AP37 to AP39 show how the max. pressure, max. rate of pressure, start of injection and combustion vary with emulsions containing TEGDN compared with E20 emulsion and 100% distillate at various speeds and loads.

ION emulsion fuels.

The max. cylinder pressure, max. rate of pressure, start of injection and combustion for the emulsions containing ION are compared to E20 emulsion and 100% distillate in FIG AP28 to AP30, AP34 to AP36 and AP40 to AP42.

The results show a trend similar to that obtained with the emulsions containing TEGDN but not to the same extent.

Thus max. cylinder pressures are almost identical at the full load conditions at all speeds for all four fuels with some divergence at the 2/3 and 1/3 loads.

Max. rate of pressure does decrease with the inclusion of ION to a small but significant degree. Again the main effect is seen at the higher speeds under full load conditions. Start of injection for the full and 2/3 loads is almost identical throughout the speed range for all the emulsions, some deviation occurring when using 100% distillate at 800 rpm. A similar phenomenon takes place at the 1400 rpm, 1/3 load condition to that obtained with the emulsions containing TEGDN i.e. the start of injection is similar for the 100% distillate and E20 emulsion while the ignition improved emulsions are similar to each other but are somewhat retarded with respect to the 100% distillate and E20.

(b) Fuel delivery, Torque and Specific fuel consumption (S.F.C.)

FIG AP43 and AP44 show the effect of the six initial fuels on the maximum fuel injection pump delivery and maximum torque. The deliveries are very similar for all the fuels tested and thus it can be stated that the fuel pump delivery is relatively insensitive to these particular fuels. It should be noted that the method of obtaining the fuel delivery is indirect. The actual fuel used is measured gravimetrically, then its volume is calculated from its known density at 15 deg C and the fuel pump inlet temperature. The volume so calculated is then divided by the number of injection strokes during the measuring period. The maximum torque is again very similar for each of the fuels the maximum difference occurs at 2000 rpm amounting to 5%, while the difference for the rest of the speed range is reduced to 2.5%. The S.F.C. for the emulsions containing TEGDN (FIG AP43) shows an apparent high variation, however the effect of the figure scaling must be noted and in fact, the greatest difference shown between the E20 emulsion and the E20/5.2 TEGDN emulsion at

1400 rpm amounts to only 2.5%. The emulsions containing ION (FIG AP 44) show even lower divergence in S.F.C. between the various fuels.

(c) Fuel delivery, Efficiency and Specific fuel consumption. (S.F.C)

TEGDN emulsion fuels.

FIG AP45 to AP48 show the effect of applied load (torque) on the above three parameters at three different speeds with the emulsion containing TEGDN.

Typically it can be deduced that 100% distillate is required in the least amount by comparison to all the emulsions to attain any given torque under the majority of conditions. The worst fuel in this respect is the E20/2.6 TEGDN emulsion. Efficiency varies with the torque and the fuel used e.g. at full and 2/3 loads, (all speeds), maximum efficiency is attained with the E20 emulsion while the 100% distillate shows minimum efficiency at full loads only.

Specific fuel consumption is dependant on the efficiency and fuel calorific value and therefore 100% distillate appears to be superior to the other fuels throughout the load and speed range. The two emulsions containing TEGDN give higher specific fuel consumptions, with the E20 emulsions showing a slight improvement over them.

The disparity in the fuel consumptions is more evident at part loads than at full load.

FIG AP51 compares the fuel delivery, efficiency and S.F.C. under full load conditions directly for the four fuels, 100% distillate, E20, E20/2.6 TEGDN and E20/5.2 TEGDN, and the three speeds.

ION emulsion fuels.

FIG AP48 to AP50 depict the variations in fuel delivery, efficiency and S.F.C. against applied load (torque) at various speeds with the emulsions containing ION.

Once again 100% distillate is required in the least amount compared to all the emulsions to attain any given load although under full load conditions the difference between any of the fuels is negligible. The three emulsions E20, E20/.2ION and E20/.4ION have almost identical performance throughout the load range at the three speeds selected, the exception being 2/3 load at 800 rpm. where greater delivery of E20/.4ION is required to attain the desired load.

The three emulsions (E20, E20/.2ION and E20/.4ION) exhibit higher efficiency under most loads and speeds, the only exception being the 2/3 load, 800 rpm condition using E20/.4ION.

Again the specific fuel consumption of all the emulsions is higher than that of 100% distillate at all loads other than full load. At the full load condition all the fuels give extremely close results.

FIG AP52 compares the fuel delivery, efficiency and S.F.C. under full load conditions directly for the four fuels, 100% distillate, E20, E20/.2ION, and E20/.4ION, and the three speeds.

Based on the results obtained it was projected that the optimum ignition improver would be TEGDN in the ratio of 3.12% TEGDN in the hydrated ethanol. This conclusion was drawn based mainly on matching the ignition delay and the rate of change of cylinder pressure to that of 100% distillate. Although it appeared that ION could be made to match at full load there was some doubt as to whether part load conditions could be matched as well. The amount that would be required was estimated at 0.8 to 1.0% of the total emulsion. Note that these amounts would be greater than those required for emulsions containing TEGDN.

The next stage of evaluation was to establish the effect of changes to static injection timing when using the "optimised E20/3.9TEGDN" emulsion. The E20/3.9TEGDN emulsion was compared to a 100% distillate datum and a full performance matrix test was carried out at 14 deg, 20 deg and 26 deg BTDC static injection timings for both fuels. Opportunity was taken to evaluate the repeatability of results over long term for the 100% distillate used as reference.

The results for this series of tests were as follows:

- (a) Commencement of Injection and Combustion, Max. Cylinder Pressure and Max. Rate of Pressure.

FIG AP53 to AP76 show the needle lift and cylinder pressure diagrams for the two fuels and the various static timings.

* 100% Distillate	20 deg BTDC	FIG AP53 - AP56
* "	14 deg BTDC	FIG AP57 - AP60
* "	26 deg BTDC	FIG AP61 - AP64
* E20/3.9TEGDN	20 deg BTDC	FIG AP65 - AP68
* "	14 deg BTDC	FIG AP69 - AP72
* "	26 deg BTDC	FIG AP73 - AP76

Again both the needle lift and cylinder pressure show good repeatability at the higher speeds and loads and poor repeatability at the low load, low speed or idle condition.

100% Distillate fuel.
FIG AP77 to AP79 are included to observe the repeatability with time using 100% distillate on these parameters. Some difference is observed in the max. pressure at full load this amounting to 5.5% at 2000 rpm where minor timing change occurred and 8% where considerable retardation (3.7 deg.) of commencement of injection occurred. The repeatability (especially at part loads) is considered very good and if timing would have been re-adjusted for each condition to ensure constant dynamic timing then excellent repeatability would have been attained.

FIG AP80-AP82 show the effect of static timing on the max. pressure, max rate of pressure and the ignition delay. As can be seen the max. pressure at full load increases considerably for a timing change from 14 deg to 20 deg BTDC but the increase in this pressure for the timing change from 20 deg to 26 deg BTDC is small. At part loads the max. pressure tends to be more proportional to the static timing at the higher speeds but follows the characteristics of the full load condition at the lower speeds.

Apart from the 800 rpm condition both the max. rate of pressure and ignition delay tend to be proportional to the static timing and they increase as the timing is advanced.

FIG AP86-AP88 are presented to show the variation in max. pressure, max. rate of pressure and ignition delay with load at the three different timings and three different speeds. It can be seen that both the max. pressure and max. rate of pressure are significantly load sensitive.

The ignition delay shows very little sensitivity to load (in fact it is marginally extended at the lower loads as would be expected from a cooler combustion chamber), it is however affected by the timing.

FIG AP92-AP94 show directly the effect of timing on the four parameters, Max. Pressure, Max. Rate of Pressure, Commencement of Injection and Commencement of Combustion.

E20/3.9 TEGDN emulsion fuel.

Results for the E20/3.9 TEGDN emulsion (FIG AP83-AP85, AP89-AP91, AP96-AP98) are virtually identical for those obtained on 100% distillate with the exception that the timing change from 26 deg to 20 deg has a greater effect on max. cylinder pressure under full load condition.

(b) Fuel Delivery, Torque and Specific Fuel Consumption.(S.F.C.)

100% Distillate.

The delivery at 2000 rpm varies by a max of 4% between that at the 20 deg timing compared to the other two. This could be due to slight governor interference however the magnitude need not be considered of great importance.

Torque increases considerably as the timing is retarded and from the results obtained it could be deduced that further retard could be possible. This does not however take into account that smoke is the limiting factor at approx. 18 deg BTDC. The specific fuel consumption also decreases with retarding the timing as would be expected from the increased torque without a corresponding increase in delivery. See FIG AP98.

FIG AP100-AP102 show the delivery required to attain a given part load condition at different engine speeds. It can be noted that the major effect of timing on all the parameters (delivery, efficiency, specific fuel consumption) occurs at full load conditions. This is shown more clearly in FIG AP106 where the delivery, efficiency and S.F.C. are plotted directly against the static timing for the various speeds.

E20/3.9 TEGDN emulsion.

(FIG AP100) Delivery is practically identical to that obtained on 100% distillate however the torque does not increase at the same rate with change in the timing. At 26 deg BTDC the torque for both the 100% distillate and E20/3.9 TEGDN emulsion are very similar but at 14 deg BTDC the torque at 1100 rpm is 5.7% lower on the emulsion than on the distillate. Specific fuel consumption follows suit being 5.7% higher on the emulsion at 1100 rpm at the retarded timing.

FIG AP103-105. Typically the thermal efficiency of the E20/3.9 TEGDN emulsion is higher than that for 100% distillate at all speeds and loads in excess of approx. 50%, at comparable timing settings. Below the 50% load the thermal efficiencies for both the distillate and emulsion are identical. Although the thermal efficiency using the emulsion

is at no time lower than that for distillate under identical conditions, the emulsion specific fuel consumption is higher than that for distillate under almost all conditions with the exception of full load at 2000 rpm and 26 deg BTDC timing (FIG AP107).

The results obtained from this test matrix indicate that a retarded timing for both the 100% distillate and E20/3.9TEGDN emulsion is highly desirable to obtain best torque, efficiency and S.F.C. Excessive smoke limits the static timing to 18 deg BTDC when using 100% distillate.

After carefully assessing all the results obtained to this point, it was considered appropriate to prepare an E25/3.9 TEGDN emulsion and set the static timing to 18 deg BTDC. Results obtained were as follows:

- (a) Commencement of Injection and Combustion, Max. Cylinder Pressure and Max. Rate of Pressure.

The needle lift and cylinder pressure diagrams are shown in FIG AP108-AP111 for 100% distillate and FIG AP112-AP115 for the E25/3.9TEGDN emulsion. Once again good repeatability is obtained at the higher speeds and loads. The low idle condition, no load and 800 rpm, is worst for repeatability both in terms of timing and start of combustion.

The commencement of injection and combustion for both 100% distillate and emulsion throughout the speed and load range are virtually identical. The only exceptions to this statement occur at the 800 rpm speed where the emulsion dynamic timing tends to be approximately 1 deg advanced and at 1400 rpm, 1/3 load where this increases to almost 2 deg.

Max. pressures for the two fuels are again almost identical throughout the speed and load range.

Maximum rate of pressure is generally higher for E25/3.9 TEGDN emulsion than for 100% distillate under full load conditions at 18 deg BTDC static timing. Typically the rate increase is approx. 2 bar/deg which is equivalent to 14% (FIG AP116-AP118).

FIG AP119-AP121 show the variation in ignition delay, max. rate of pressure and max. pressure with torque at different speeds. The ignition delay is identical for 100% distillate and E25/3.9 TEGDN emulsion and the max. cylinder pressures are very similar. The maximum difference between

the two fuels occurs in the max. rate of pressure, however, as already pointed out in the previous paragraph this increase with the emulsion amounts to a maximum of only 14%.

(b) Fuel delivery, Torque and Specific Fuel Consumption (S.F.C.). FIG AP122

The fuel delivery using E25/3.9 TEGDN emulsion is marginally higher than with 100% distillate throughout the speed range under full load conditions with the exception of 1700 rpm where it is marginally lower. It could however be considered that the fuel delivery is insensitive to the type of fuel being used.

The maximum reduction in torque occurs at 1700 rpm using the E25/3.9 TEGDN emulsion and amounts to 6.9%. From consideration of calorific value and actual fuel deliveries, the reduction in torque should have been in the order of 13.75%.

S.F.C. does increase with the emulsion, typical increase being in the order of 5.4%.

FIG AP123-AP125 show the effect of torque on the fuel delivery, efficiency and S.F.C. It can be seen quite clearly that increased fuel delivery of the E25/3.9TEGDN emulsion is required to attain the same torque as that obtained with 100% distillate.

The efficiency at loads exceeding 50% is almost always higher with the emulsion the only exception being the 2/3 load condition at 800 rpm. Below the 50% load the efficiencies of the two fuels are very similar.

5.6 DISCUSSION OF ENGINE TEST RESULTS.

From the results obtained it can be readily deduced that a stable emulsion containing distillate, hydrated ethanol and ignition improver can be readily prepared using the Apace Research Ltd. emulsifier. It is also apparent that this emulsion can be formulated to obtain the ignition characteristics of a high quality automotive distillate and that the alcohol content is not limited by thermodynamic considerations. The fact that TEGDN is used as an ignition improver for 100% hydrated ethanol engines should make this obvious. The maximum amount of ethanol substitution will therefore be governed by other factors, either physical or economic.

The FORD 3000 engine used in these tests exhibited, on 100% distillate, a rather poor thermal efficiency with correspondingly low torque and high specific fuel consumption. The improvement in performance on emulsion was relatively high, in fact much higher than could be reasonably expected. It is suspected that with more developed engines, the extent of performance improvement will be reduced over that obtained with the FORD 3000 engine.

It is to be expected that performance in terms of torque (power) will be reduced in some proportion to the calorific value of the fuel and hence, in the case of emulsions, to the amount of alcohol present. In the majority of cases the power drop will not be directly proportional to the calorific value of the fuel, the increased thermal efficiency and re-adjustment of the injection timing offsetting some of the calculated theoretical change. For example the calculated power drop for an E25/3.9 TEGDN emulsion compared to distillate on calorific value only should be 11.9%. The actual power drop obtained on the FORD 3000 engine amounted to an average of 2.2% when comparing the distillate results at 20 deg BTDC and E25/3.9 TEGDN emulsion at 18 deg BTDC static timing. It would be unwise to predict this sort of performance for other engines and a more realistic figure would be in the order of 7% power drop when changing from 100% distillate to the E25/3.9 TEGDN emulsion with the static timing optimised.

Should the application demand that full power be restored then the fuel delivery would have to be increased by a corresponding amount.

Generally there are two ways to increase the fuel delivery from a fuel injection pump. One way is to lengthen the injection period while the other is to increase the injection rate.

It would seem that increasing the injection period is the simplest way of increasing the fuel delivery and in the vast majority of instances this will be the case. It must however be borne in mind that a combination of retarded timing and extended injection period could cause late cycle burn to occur in some engines. This would result in loss of thermal efficiency and high exhaust gas temperatures.

Engines fitted with in-line fuel injection pumps having constant beginning of injection control helix would simply require maximum fuel and injection timing re-setting which is a simple operation. Generally an in-line pump has excess fuel capacity of at least 40%. There may however be rare applications where the additional fuel is injected over a sensitive cam radius with resultant high cam stresses.

Increasing the injection period on a DPA distributor type pump results in a change of injection timing and

this timing change would have to be taken into account in addition to any other timing change required. This pump does not possess excess fuel capability and in some instances may already be operated close to its maximum rated fuel delivery. Additionally in some applications the roller- camring contact occurs coincidentally with (or it may even precede) the delivery port opening. Increasing the delivery period under these circumstances would lead to high cam stresses and cam failure. A change of cam to delivery port phasing can be achieved by a change of either the camring or advance piston but this would affect the torque curve shape of the engine.

Increasing the fuel pump delivery by increasing the fuel injection rate would necessitate larger diameter pumping elements (irrespective of the type of pump). New injector nozzles, hopefully only having larger diameter spray holes, would also have to be fitted. Again there will be instances where a pump is already close to its design limit and a completely new pump would be required. This method, even in its simplest implementation could be considered as economically unsuitable.

5.7 CONCLUSIONS ON ENGINE PERFORMANCE.

- * The performance of the engine was considered excellent when operating on ethanol emulsions containing TEGDN ignition improver.
- * The amount of TEGDN required is determined by the ethanol content of the emulsion. The optimum amount of TEGDN is considered to be 3.12% of the hydrated (95% v/v) ethanol. Please note that for a 15% ethanol emulsion there is no requirement for an ignition improver.
- * The maximum ethanol substitution should be considered as 25% of the emulsion resulting in changes limited to minor adjustments only.
- * Although not commented upon elsewhere, noise levels using the emulsion containing TEGDN were comparable to those using 100% distillate.

6. TOYOTA LANDCRUISER.

A Toyota Landcruiser Model HJ 45RV-KCQ fitted with an H series engine (indirect injection) has been used by Apace Research Ltd. for the evaluation of a number of emulsions over a period of years. Most of the evaluation period (3 years and 50000kms) was spent operating on 15% ethanol emulsion containing no ignition improvers. No problems have been experienced during this period and average road operating fuel consumption was virtually identical for both 100% distillate and 15% ethanol emulsion (12.5 km/litre). Cold starting, although always satisfactory

when used with glow plugs, resulted in a period of knock during the engine warm-up period with both the 100% distillate and 15% ethanol emulsion. The warm up period tended to be longer (20 seconds instead of 10 seconds) with the emulsion.

Once the optimum ignition improver had been established on the engine test bed, a road performance test was carried out.

The fuel selected for this test was E20/3.9 TEGDN where the 20% ethanol content of the emulsion contained 3.12% TEGDN. It was considered that this would probably be the most widely used fuel where little or no engine/ fuel injection equipment changes would be required and yet have similar thermodynamic properties to that of distillate.

A long, straight and level stretch of road was selected for the vehicle road testing. A number of full acceleration tests were carried out at 30 to 60 km/hr in third gear , 60 to 80 and 60 to 90 km/hr in top (fourth) gear. The times obtained during these acceleration tests were averaged and are shown in Table 10. It should be noted that run to run variations in the measured times exceeded the average difference between the fuels. For example the time for the 60 to 80 km/hr test using distillate varies from 10.96 to 12.26 seconds giving an average of 11.65 seconds while for the E20/3.9TEGDN emulsion the time varies from 11.59 to 13.02 seconds with an average of 12.175 seconds.

The reduction in power when using the E20/3.9 TEGDN emulsion (although it appears to be considerable when times are taken into account) is not reflected in the driveability of the vehicle. The fuel pump delivery was temporarily reset, by allowing an extra 0.25 mm control rack travel, and it can be seen that power could be quite easily regained if absolutely essential.

TABLE 10. Acceleration Times for Toyota Landcruiser.

Speed Range km/hr	30-60	60-80	80-90	60-90
DIST 100	3.22	11.65	6.39	18.04
E20/3.9TEGDN	8.56	12.175	7.445	19.62
E20/3.9TEGDN (0.25 mm rack adjustment)	8.23	11.4	6.9	18.3

The engine performed smoothly on the E20/3.9TEGDN emulsion and virtually no smoke was emitted even when operating on excess fuel on start up. Cold starting was found to be superior to that on 100% distillate in as much that glow plugs needed to be used for shorter periods (approx 50%) at any given ambient temperature and there was an almost total absence of the cold start knock.

7. RECOMMENDATIONS.

* From the results obtained from these tests there would appear to be no thermodynamic barriers to prevent the introduction of ethanol emulsions containing ignition improvers into existing diesel engined equipment. As has been shown, the emulsions can be tailored to give a performance equal to that of distillate without the need for any engine changes, with the exception of possible minor adjustments to fuel injection equipment. Consequently engine manufacturers and fuel injection equipment manufacturers should be approached and test programmes established in conjunction with the traditional fuel distributors and potential fuel (alcohol) producers/suppliers within developing countries.


- * Large scale trials should be undertaken in developing countries to:
- Make potential users aware of the availability of emulsion technology.
 - Demonstrate the compatibility of the emulsion with distillate and existing diesel engines.
 - Demonstrate that emulsion fuels can be used with no impairment to the performance of diesel engined equipment.

Such trials should have the following features:


- Undertaken in a country with an indigenous ethanol supply (e.g. Malawi, Thailand, Brazil).
- Comprise a mixed fleet of automotive, agricultural and earth moving equipment totalling 30 to 50 units. These units should be based within a limited area of 20 km radius and have an operating range of 50 km. A further 5 to 10 mixed units should be tested concurrently on 100% distillate to serve as controls.
- Adequate field workshop facilities should be available for on site unit maintenance. Any part failures should be evaluated by both the original manufacturer and an independent assessor.
- Adequate emulsion blending facilities and storage should be centrally located in the test area.
- Supervision and monitoring of the trial should include:
 - a. Regular measurement of engine power.
 - b. Constant measurement of fuel consumption.
 - c. Regular sampling of engine oil.
 - d. Keeping of a maintenance log.
 - e. Good record keeping of all aspects of the trial.
- The trial should extend for a minimum period of one year.
- Visits by senior government officials of other developing countries to observe the trials should be encouraged.

Such trials would put to rest the fears and doubts concerning this "new fuel" that will inevitably exist.


- * Further research should be carried out in the area of ignition improvers with special emphasis on :
 - Increasing the effectiveness of TEGDN.
 - Establishing the effect of TEGDN in emulsions containing low ignition quality distillates.
 - Determining the effect of emulsions containing ignition improvers on exhaust emissions.

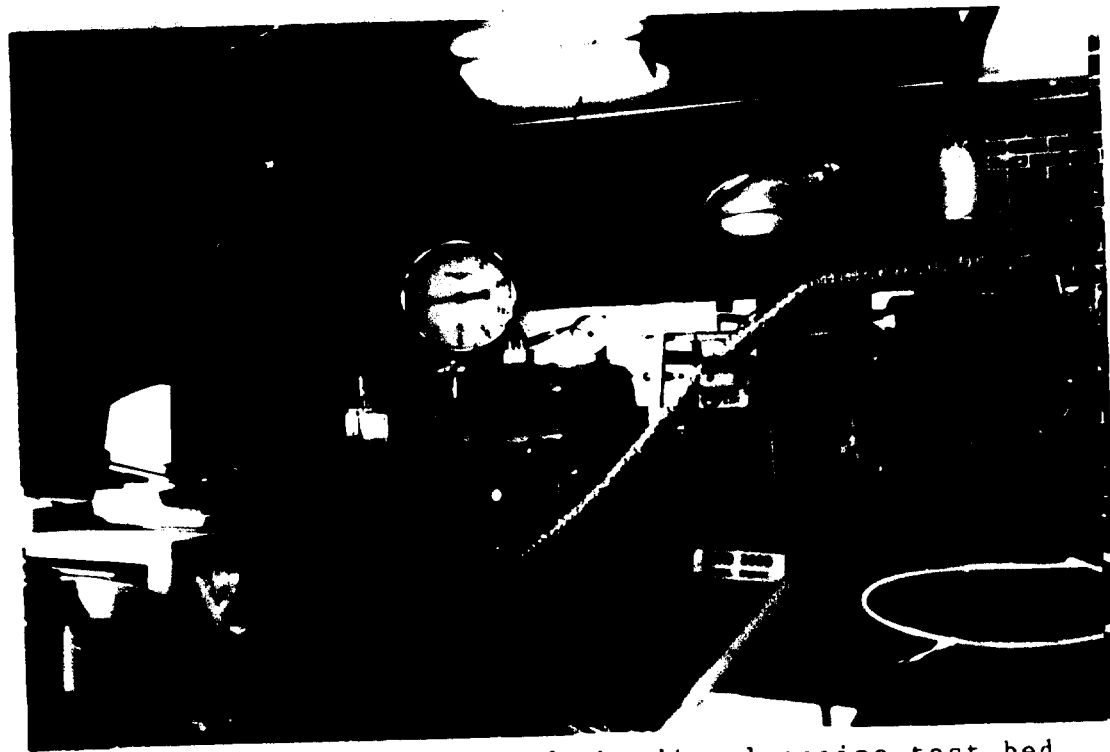


Ph.G.1 - An overall view of the diesel engine test bed and fuel evaluation test equipment as used for this UNIDO project. Photograph shows the data acquisition and control computer and the other instrumentation sitting on the hot air box, at left, the dynamometer, centre and the diesel engine to the right.

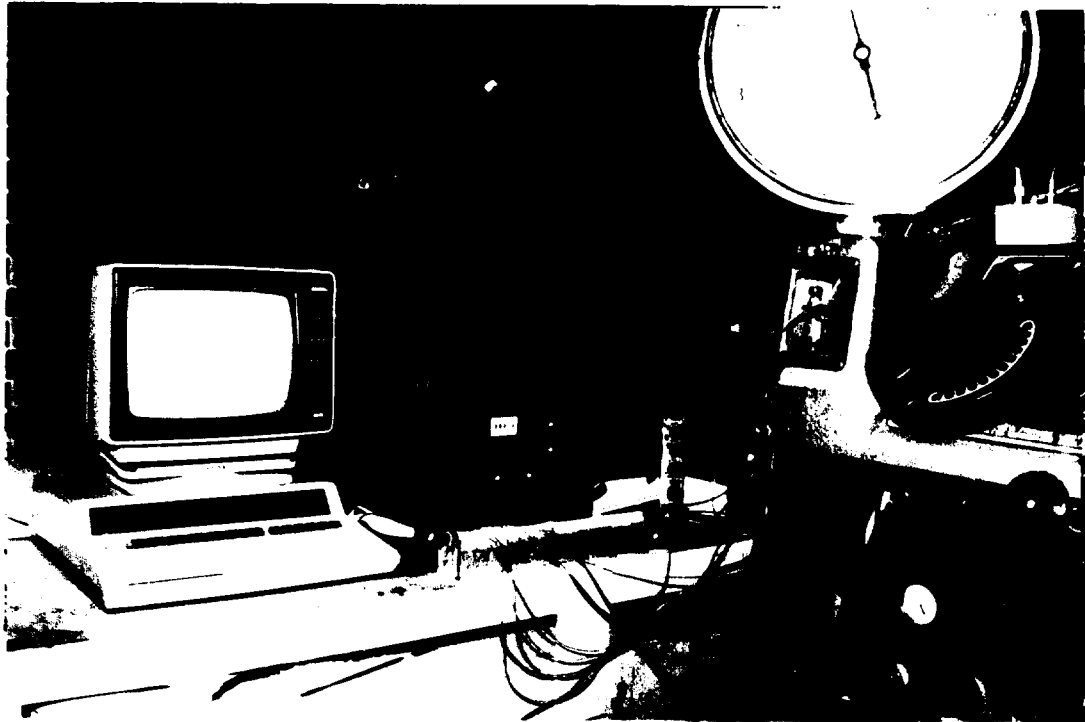


Ph.G.2 - Close up view showing the Hewlett Packard 86B computer and the Apace Research Ltd interface (black box) with the dynamometer partially visible on the right hand side.

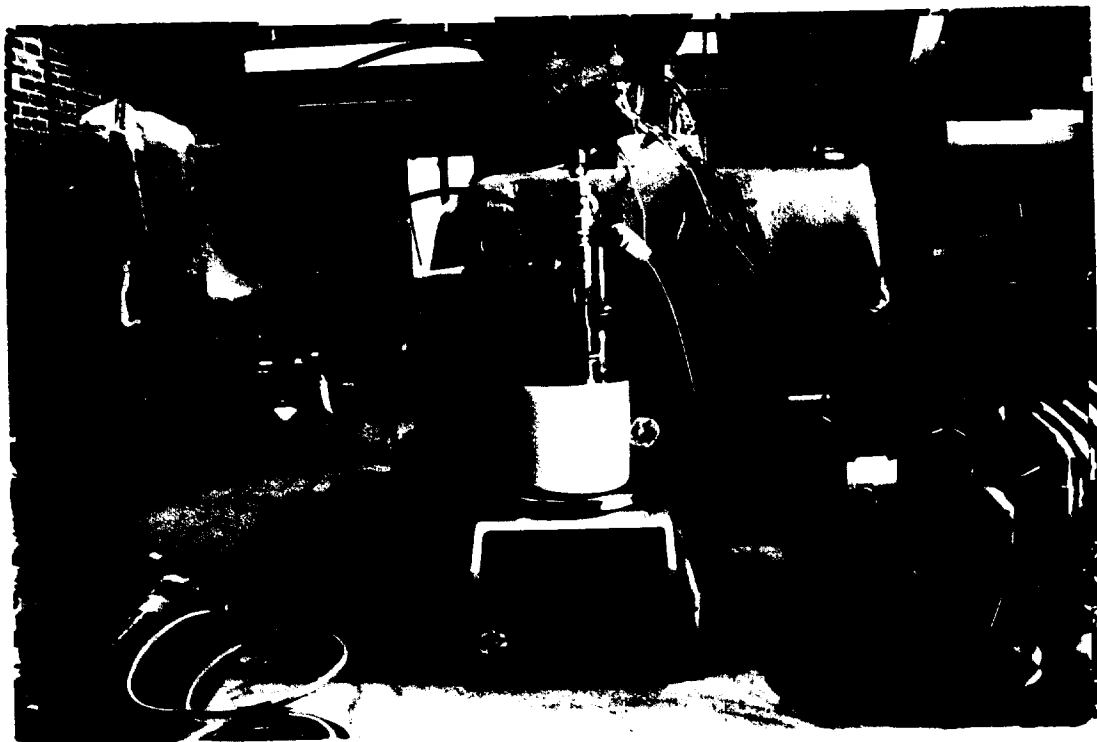

Ph.G.3 - Fuel mass measurement system- showing a
2 litre glass beaker containing emulsion
sitting on a Mettler electronic balance. Fuel
feed pumps are visible to the left.

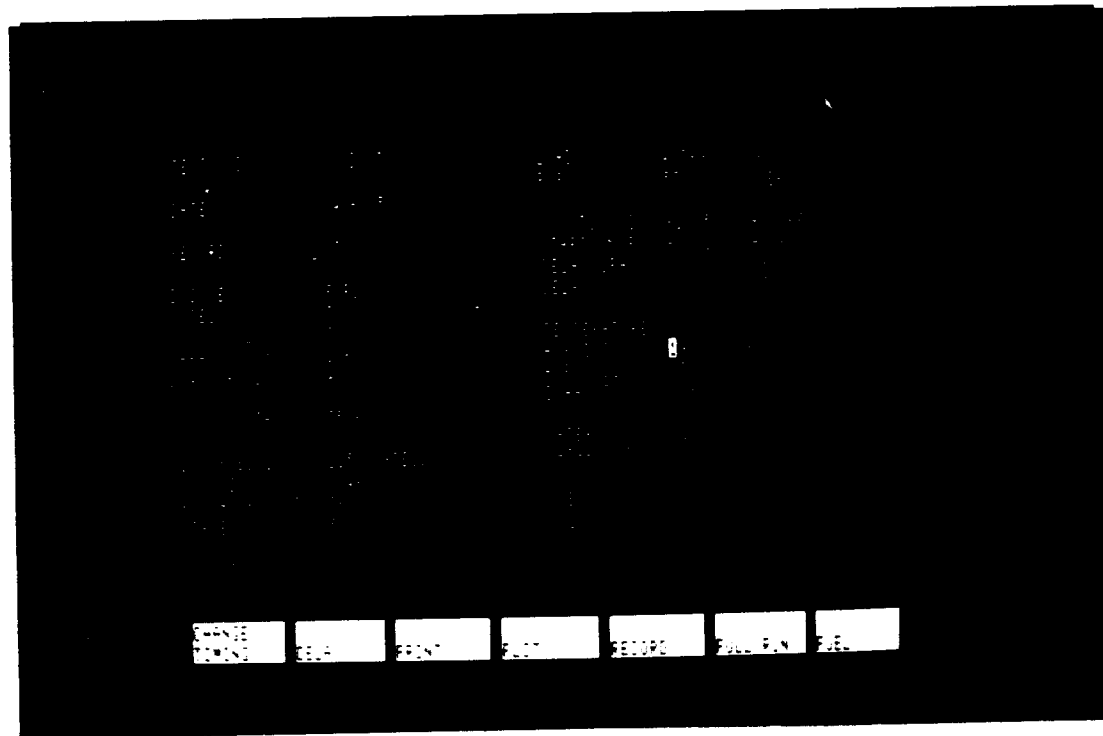

Ph.G.4 - This photograph shows the video screen of the computer displaying the many variables measured by the instrumentation as well as the selectable control functions along the bottom of the screen (inverse video).

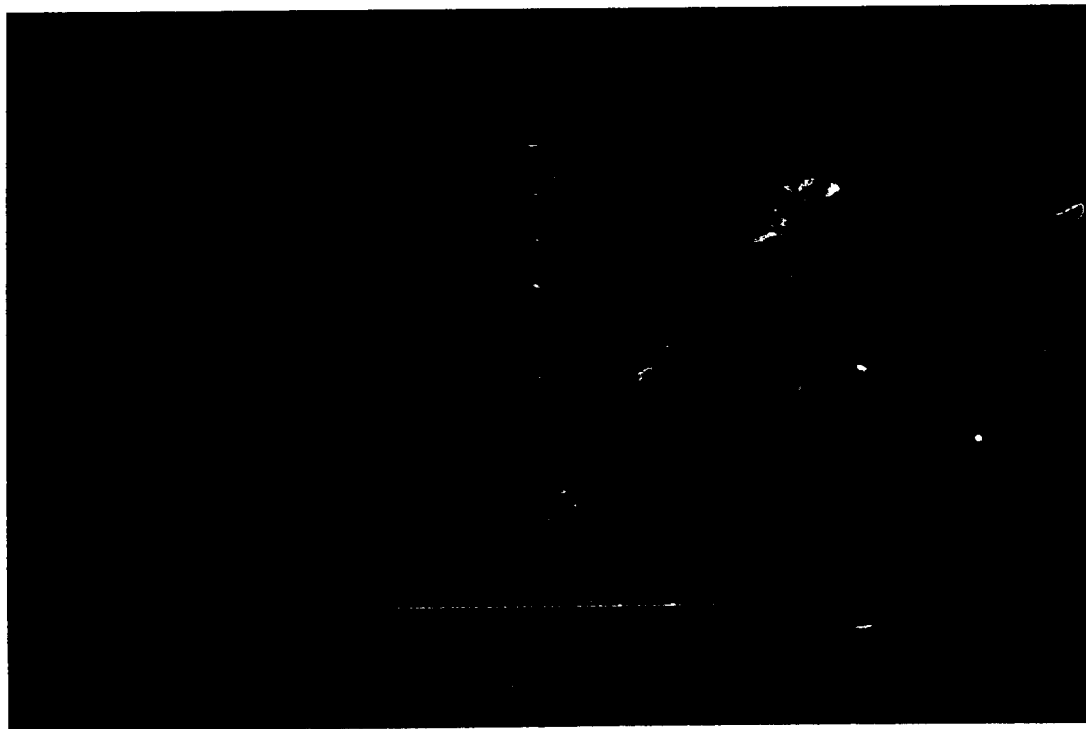

Ph.G.5 - Another view of the video monitor with the PLOT function selected, displaying the cylinder pressure and needle lift traces.

BLENDING OF ALCOHOL WITH DIESEL FUELS

VOLUME 2 of 2

APPENDIX 1
APPENDIX 2

APPENDIX 1
 =====
 Engine Results Curves.

FIG	Title		
AP1	Repeatability of Needle Lift and Cyl. Pressure	DIST 100	2000 rpm
AP2	"	"	1400 "
AP3	"	"	800 "
AP4	"	"	IDLE
AP5	"	E20	2000 rpm
AP6	"	"	1400 "
AP7	"	"	800 "
AP8	"	"	IDLE
AP9	"	E20/2.6TEGDN	2000 rpm
AP10	"	"	1400 "
AP11	"	"	800 "
AP12	"	"	IDLE
AP13	"	E20/5.2TEGDN	2000 rpm
AP14	"	"	1400 "
AP15	"	"	800 "
AP16	"	"	IDLE
AP17	"	E20/0.2ION	2000 rpm
AP18	"	"	1400 "
AP19	"	"	800 "
AP20	"	"	IDLE
AP21	"	E20/0.4ION	2000 rpm
AP22	"	"	1400 "
AP23	"	"	800 "
AP24	"	"	IDLE
AP25	Effect of TEGDN on Start of Injection, Combustion, Max. Pressure and Pressure Rate v rpm		Full load
AP26	DIST 100, E20, E20/2.6TEGDN, E20/5.2TEGDN		2/3 load
AP27	"		1/3 load
AP28	Effect of ION on Start of Injection, Combustion, Max. Pressure and Pressure Rate v rpm		Full load
AP29	DIST 100, E20, E20/0.2ION, E20/0.4ION		2/3 load
AP30	"		1/3 load
AP31	Effect of TEGDN on Start of Injection, Combustion, Max. Pressure and Pressure Rate v Torque		Full load
AP32	DIST 100, E20, E20/2.6TEGDN, E20/5.2TEGDN		2/3 load
AP33	"		1/3 load

APPENDIX 1
 =====
 Engine Results Curves.

FIG	Title	
	Effect of ION on Start of Injection, Combustion, Max. Pressure and Pressure Rate v Torque	
AP34	DIST 100, E20, E20/0.2ION, E20/0.4ION	Full load
AP35	"	2/3 load
AP36	"	1/3 load
	Effect of TEGDN on Start of Injection, Combustion, Max. Pressure and Pressure Rate v Fuel Blend	
AP37	Full load, 2/3 load, 1/3 load	2000 rpm
AP38	"	1400 "
AP39	"	800 "
	Effect of ION on Start of Injection, Combustion, Max. Pressure and Pressure Rate v Fuel Blend	
AP40	Full load, 2/3 load, 1/3 load	2000 rpm
AP41	"	1400 "
AP42	"	800 "
	Effect of TEGDN on Injection Pump Delivery, Torque and S.F.C. v rpm	
AP43	DIST 100, E20, E20/2.6TEGDN, E20/5.2TEGDN	Full load
	Effect of ION on Injection Pump Delivery, Torque and S.F.C. v rpm	
AP44	DIST 100, E20, E20/0.2ION, E20/0.4ION	Full load
	Effect of TEGDN on Injection Pump Delivery, Efficiency and S.F.C. v Torque	
AP45	DIST 100, E20, E20/2.6TEGDN, E20/5.2TEGDN	2000 rpm
AP46	"	1400 "
AP47	"	800 "
	Effect of ION on Injection Pump Delivery, Efficiency and S.F.C. v Torque	
AP48	DIST 100, E20, E20/0.2ION, E20/0.4ION	2000 rpm
AP49	"	1400 "
AP50	"	800 "
	Effect of TEGDN on Injection Pump Delivery, Efficiency and S.F.C. v Fuel Blend	
AP51	2000 rpm, 1400 rpm, 800rpm	Full load
	Effect of ION on Injection Pump Delivery, Efficiency and S.F.C. v Fuel Blend	
AP52	2000 rpm, 1400 rpm, 800 rpm	Full load

APPENDIX I
 =====
 Engine Results Curves.

FIG	Title		
	Repeatability of Needle Lift and Cyl. Pressure		
AP53	20 deg BTDC	DIST 100	2000 rpm
AP54	"	"	1400 "
AP55	"	"	800 "
AP56	"	"	IDLE
AP57	14 deg BTDC	"	2000 rpm
AP58	"	"	1400 "
AP59	"	"	800 "
AP60	"	"	IDLE
AP61	26 deg BTDC	"	2000 rpm
AP62	"	"	1400 "
AP63	"	"	800 "
AP64	"	"	IDLE
AP65	20 deg BTDC	E20/3.9TEGDN	2000 rpm
AP66	"	"	1400 "
AP67	"	"	800 "
AP68	"	"	IDLE
AP69	14 deg BTDC	"	2000 rpm
AP70	"	"	1400 "
AP71	"	"	800 "
AP72	"	"	IDLE
AP73	26 deg BTDC	"	2000 rpm
AP74	"	"	1400 "
AP75	"	"	800 "
AP76	"	"	IDLE
	Long Term DIST 100 Repeatability of Start of : Injection, Combustion, Max. Pressure and Pressure Rate v rpm		
AP77	"		Full load
AP78	"		2/3 load
AP79	"		1/3 load
	Effect of Static Timing on Ignition Delay, Max. Pressure and Pressure Rate v rpm		
AP80	14 deg, 20 deg, 26 deg BTDC	DIST 100	Full load
AP81	"	"	2/3 load
AP82	"	"	1/3 load
AP83	"	E20/3.9TEGDN	Full load
AP84	"	"	2/3 load
AP85	"	"	1/3 load


APPENDIX 1
 =====
 Engine Results Curves.

FIG	Title		
	Effect of Static Timing on Ignition Delay, Max. Pressure and Pressure Rate v Torque		
AP86	14 deg, 20 deg, 26 deg BTDC	DIST 100	2000 rpm
AP87	"	"	1400 "
AP88	"	"	800 "
AP89	"	E20/3.9TEGDN	2000 rpm
AP90	"	"	1400 "
AP91	"	"	800 "
	Effect of Static Timing on Start of: Injection, Combustion, Max. Pressure and Pressure Rate		
AP92	Full load, 2/3 load, 1/3 load	DIST 100	2000 rpm
AP93	"	"	1400 "
AP94	"	"	800 "
AP95	"	E20/3.9TEGDN	2000 rpm
AP96	"	"	1400 "
AP97	"	"	800 "
	Effect of Static Timing on Injection Pump Delivery, Torque and S.F.C. v rpm		
AP98	14 deg, 20 deg, 26 deg BTDC	DIST 100	Full load
AP99	"	E20/3.9TEGDN	Full load
	Effect of Static Timing on Injection Pump Delivery, Efficiency and S.F.C. v Torque		
AP100	14 deg, 20 deg, 26 deg BTDC	DIST 100	2000 rpm
AP101	"	"	1400 "
AP102	"	"	800 "
AP103	"	E20/3.9TEGDN	2000 rpm
AP104	"	"	1400 "
AP105	"	"	800 "
	Effect of Static Timing on Injection Pump Delivery, Efficiency and S.F.C.		
AP106	2000 rpm, 1400 rpm, 800 rpm	DIST 100	Full load
AP107	"	E20/3.9TEGDN	Full load


APPENDIX 1
=====

Engine Results Curves.


FIG	Title		
	Repeatability of Needle Lift and Cyl. Pressure		
AP108	18 deg BTDC	DIST 100	2000 rpm
AP109	"	"	1400 "
AP110	"	"	800 "
AP111	"	"	IDLE
AP112	"	E25/3.9TEGDN	2000 rpm
AP113	"	"	1400 "
AP114	"	"	800 "
AP115	"	"	IDLE
	Effect of TEGDN on Start of Injection, Combustion, Max. Pressure and Pressure Rate v rpm		
AP116	DIST 100, E25/3.9TEGDN	18 deg	Full load
AP117	"	"	2/3 load
AP118	"	"	1/3 load
	Effect of TEGDN on Ignition Delay, Max. Pressure and Pressure Rate v Torque		
AP119	DIST 100, E25/3.9TEGDN	"	2000 rpm
AP120	"	"	1400 "
AP121	"	"	800 "
	Effect of E25/3.9TEGDN Emulsion on Injection Pump Delivery, Torque and S.F.C.		
AP122	DIST 100, E25/3.9TEGDN	"	Full load
	Effect of E25/3.9TEGDN Emulsion on Injection Pump Delivery, Efficiency and S.F.C. v Torque		
AP123	DIST 100, E25/3.9TEGDN	"	2000 rpm
AP124	"	"	1400 "
AP125	"	"	800 "

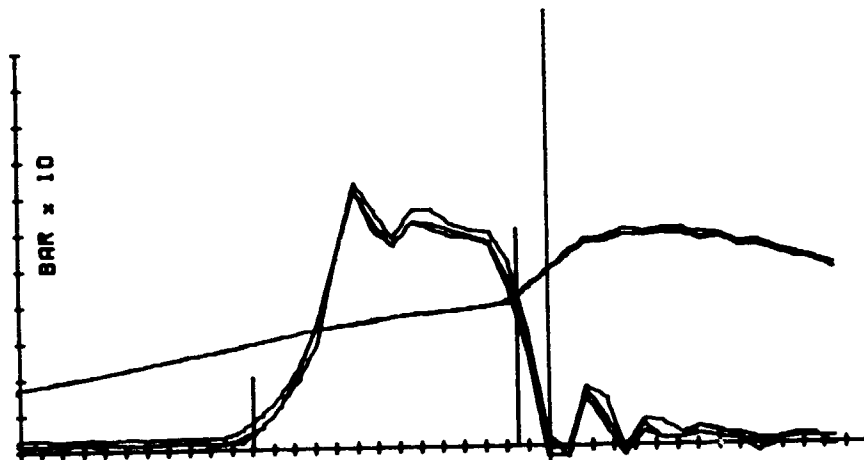

AVERAGE
 TORQUE : 37
 R.P.M. : 2034
 START OF
 INJN. : 13.9
 COMBN. : 1.4
 DELAY
 DEGREES : 12.5
 MS : 1.025
 MAXIMUM
 PRESSURE: 59
 RATE : 5.8
 TEMPERATURES
 AIR INLET: 32
 EXHAUST : 187

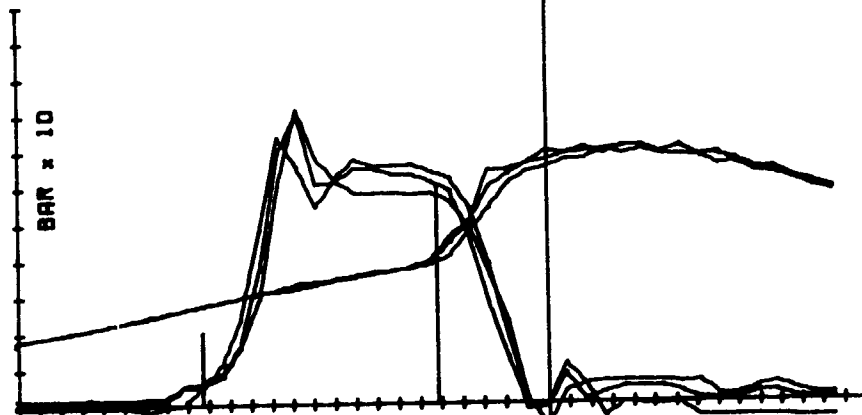


AVERAGE
 TORQUE : 69
 R.P.M. : 2028
 START OF
 INJN. : 16.2
 COMBN. : 5.1
 DELAY
 DEGREES : 11.1
 MS : .912
 MAXIMUM
 PRESSURE: 70.4
 RATE : 9.3
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 265

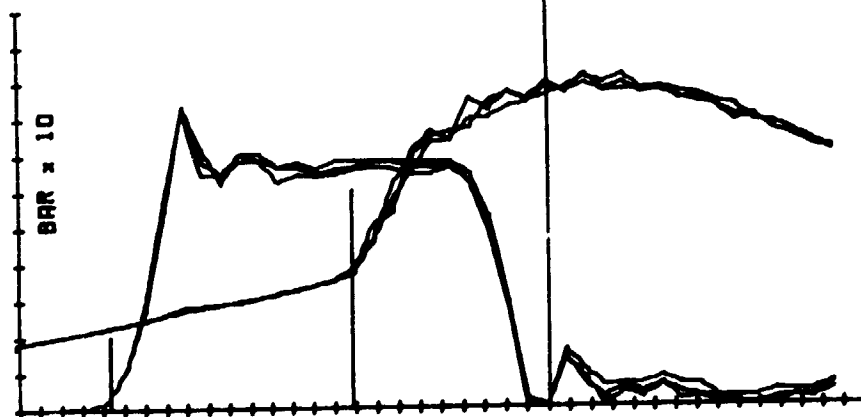

AVERAGE
 TORQUE : 140
 R.P.M. : 2008
 START OF
 INJN. : 20.7
 COMBN. : 9.1
 DELAY
 DEGREES : 11.6
 MS : .858
 MAXIMUM
 PRESSURE: 90.5
 RATE : 13.3
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 377

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN100-0	DENSITY : .649
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP1

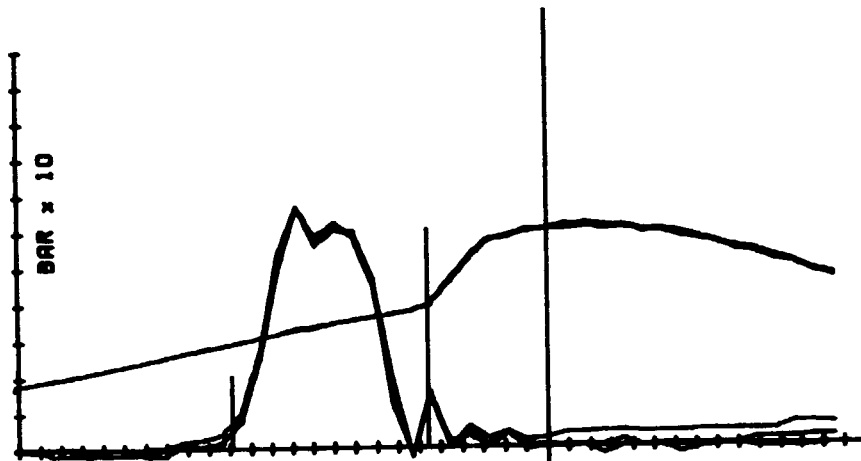

AVERAGE
 TORQUE : 37
 R.P.M. : 1451
 START OF
 INJN. : 14.8
 COMBN. : 5.8
 DELAY
 DEGREES : 9.2
 MS : 1.067
 MAXIMUM
 PRESSURE: 81.4
 RATE : 9.7
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 154




AVERAGE
 TORQUE : 69
 R.P.M. : 1458
 START OF
 INJN. : 17.7
 COMBN. : 8.3
 DELAY
 DEGREES : 9.4
 MS : 1.068
 MAXIMUM
 PRESSURE: 75.4
 RATE : 9.5
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 233




AVERAGE
 TORQUE : 146
 R.P.M. : 1452
 START OF
 INJN. : 22.8
 COMBN. : 12.8
 DELAY
 DEGREES : 10.2
 MS : 1.188
 MAXIMUM
 PRESSURE: 98.2
 RATE : 13.8
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 387

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2800	C.V. : 42.75
TEST ID. : UNIDG-0	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP2	

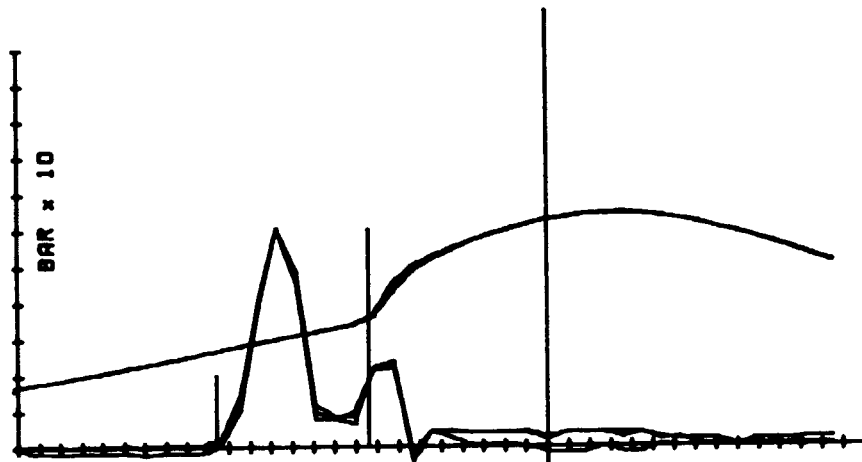

AVERAGE
 TORQUE : 37
 R.P.M. : 817
 START OF
 INJN. : 15.5
 COMBN. : 8.4
 DELAY
 DEGREES : 7.1
 MS : 1.465
 MAXIMUM
 PRESSURE: 64.5
 RATE : 7.4
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 140

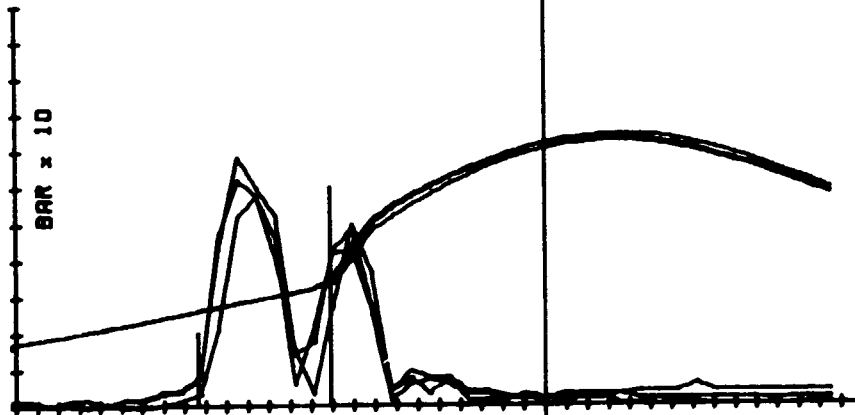


AVERAGE
 TORQUE : 89
 R.P.M. : 809
 START OF
 INJN. : 16.4
 COMBN. : 10.1
 DELAY
 DEGREES : 6.3
 MS : 1.298
 MAXIMUM
 PRESSURE: 73.4
 RATE : 6.2
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 188

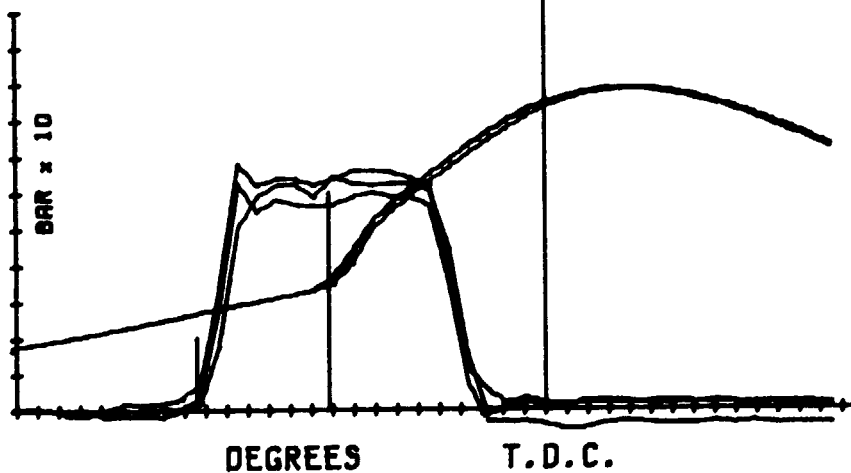


AVERAGE
 TORQUE : 148
 R.P.M. : 843
 START OF
 INJN. : 16.4
 COMBN. : 10.1
 DELAY
 DEGREES : 6.3
 MS : 1.24
 MAXIMUM
 PRESSURE: 88
 RATE : 6.8
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 321

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNID0-0	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP3	

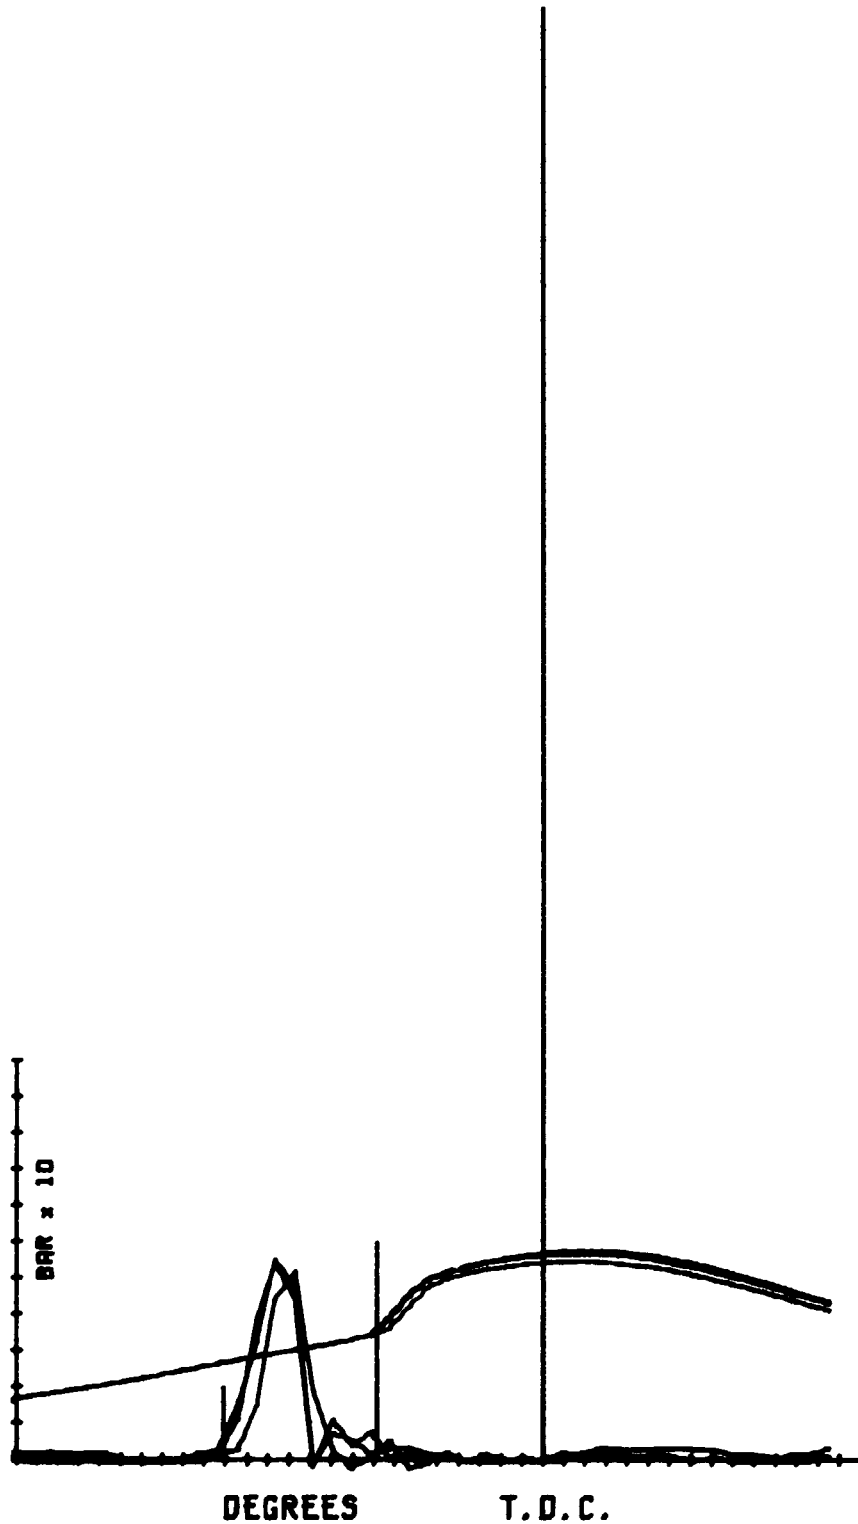


AVERAGE
 TORQUE : 3
 R.P.M. : 620
 START OF
 INJN. : 15.1
 COMB. : 7.0
 DELAY
 DEGREES : 7.3
 μ S : 1.471
 MAXIMUM
 PRESSURE: 55.9
 RATE : 0.3
 TEMPERATURES
 AIR INLET: 20
 EXHAUST : 94


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UNID0-0	DENSITY : .649
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP4

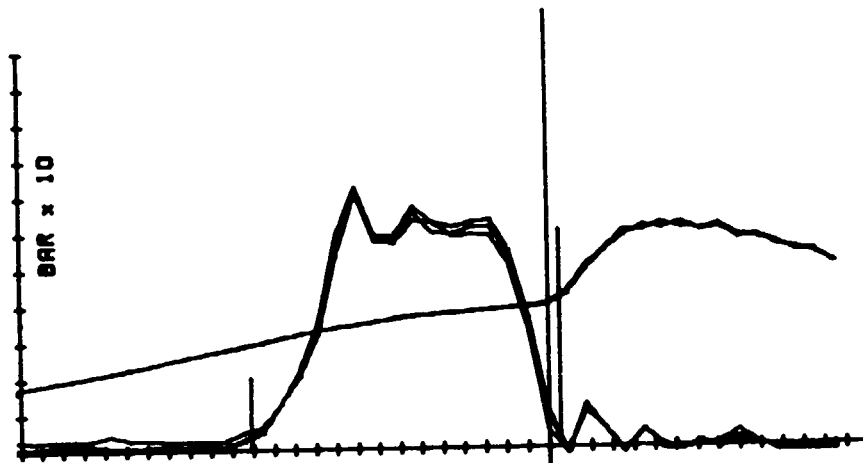

AVERAGE
 TORQUE : 35
 R.P.M. : 2028
 START OF
 INJN. : 14.1
 COMBN. : -.5
 DELAY
 DEGREES : 14.6
 MS : 1.202
 MAXIMUM
 PRESSURE: 61.5
 RATE : 6.8
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 178

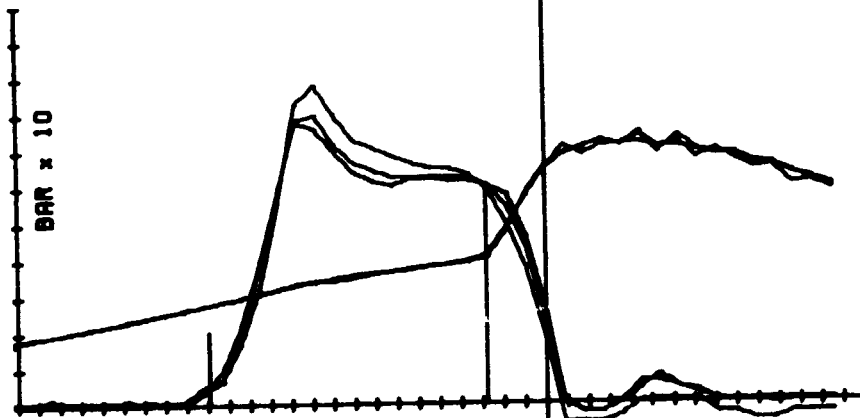


AVERAGE
 TORQUE : 89
 R.P.M. : 2042
 START OF
 INJN. : 16
 COMBN. : 2.8
 DELAY
 DEGREES : 13.2
 MS : 1.074
 MAXIMUM
 PRESSURE: 73.1
 RATE : 9.5
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 278

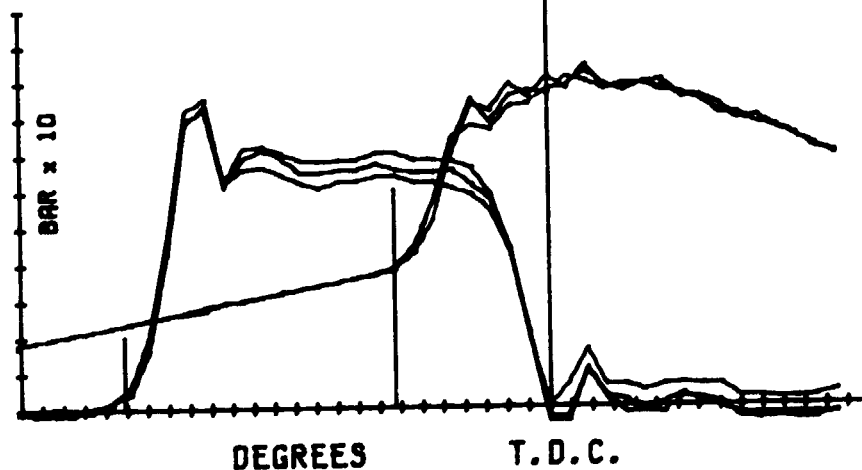


AVERAGE
 TORQUE : 138
 R.P.M. : 2011
 START OF
 INJN. : 20.1
 COMBN. : 7.3
 DELAY
 DEGREES : 12.8
 MS : 1.083
 MAXIMUM
 PRESSURE: 92.7
 RATE : 17.6
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 358


ENGINE : FORD 3000	FUEL ID : E20
CAPACITY : 2860	C.V. : 38
TEST ID. : UNID0-1	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP5	

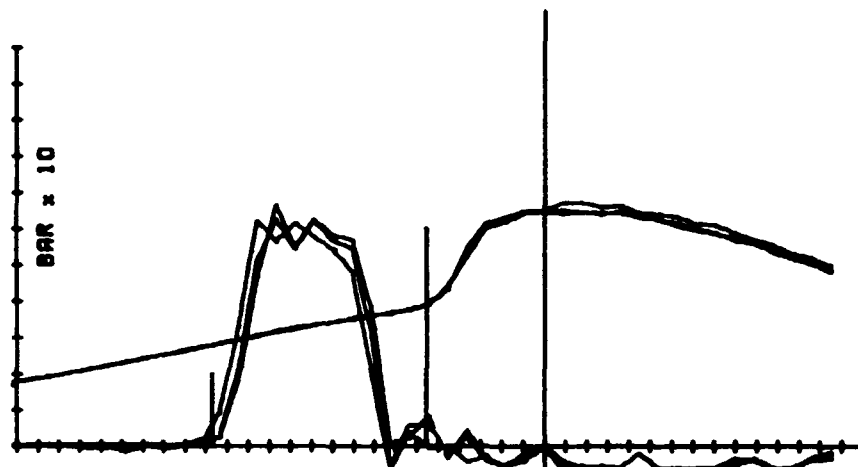

AVERAGE
 TORQUE : 39
 R.P.M. : 1436
 START OF
 INJN. : 15.6
 COMON. : 5.5
 DELAY
 DEGREES : 10.1
 ϕ S : 1.176
 MAXIMUM
 PRESSURE: 65.3
 RATE : 9.1
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 155

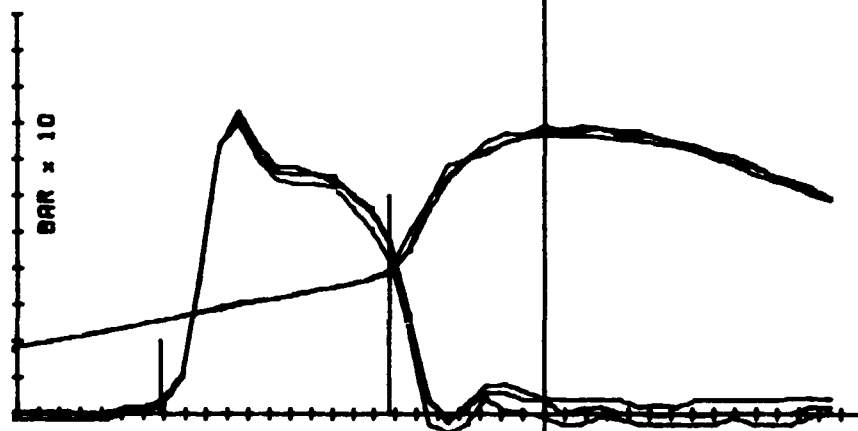


AVERAGE
 TORQUE : 69
 R.P.M. : 1444
 START OF
 INJN. : 16.1
 COMON. : 7.3
 DELAY
 DEGREES : 10.6
 ϕ S : 1.25
 MAXIMUM
 PRESSURE: 76.6
 RATE : 12.4
 TEMPERATURES
 AIR INLET: 32
 EXHAUST : 230

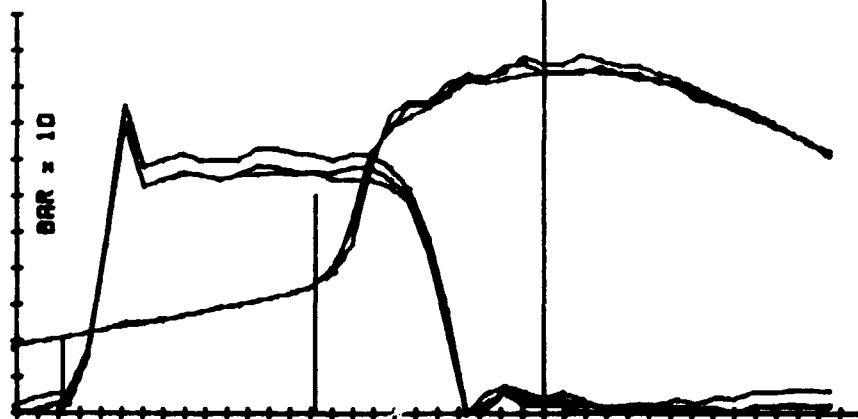


AVERAGE
 TORQUE : 146
 R.P.M. : 1450
 START OF
 INJN. : 22.6
 COMON. : 10.7
 DELAY
 DEGREES : 12.1
 ϕ S : 1.363
 MAXIMUM
 PRESSURE: 97.1
 RATE : 20
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 371

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20
CAPACITY : 2660	C.V. : 36
TEST ID. : UN100-1	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP6	

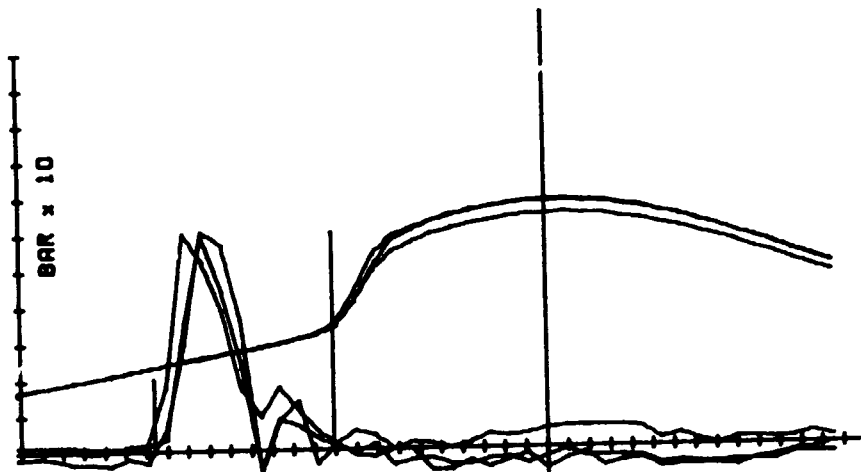

AVERAGE
 TORQUE : 30
 R.P.M. : 824
 START OF
 INJN. : 18.6
 COMBN. : 10.1
 DELAY
 DEGREES : 8.5
 MS : 1.723
 MAXIMUM
 PRESSURE: 67
 RATE : 9.7
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 135

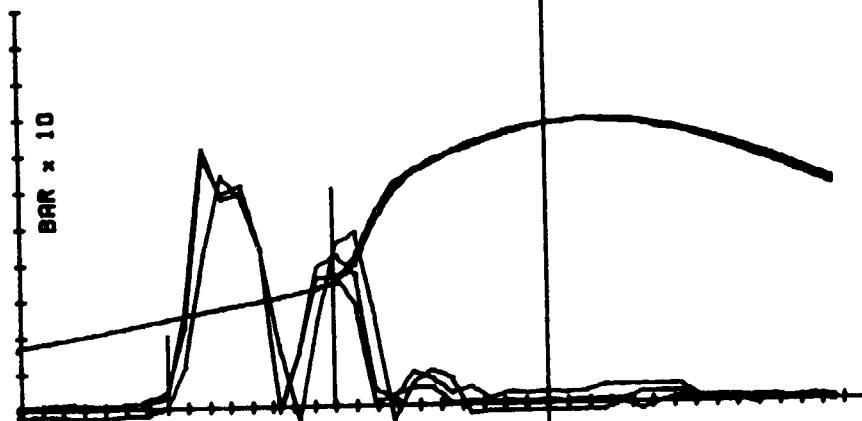

AVERAGE
 TORQUE : 92
 R.P.M. : 824
 START OF
 INJN. : 18
 COMBN. : 10
 DELAY
 DEGREES : 8
 MS : 1.6
 MAXIMUM
 PRESSURE: 77.9
 RATE : 10.8
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 199

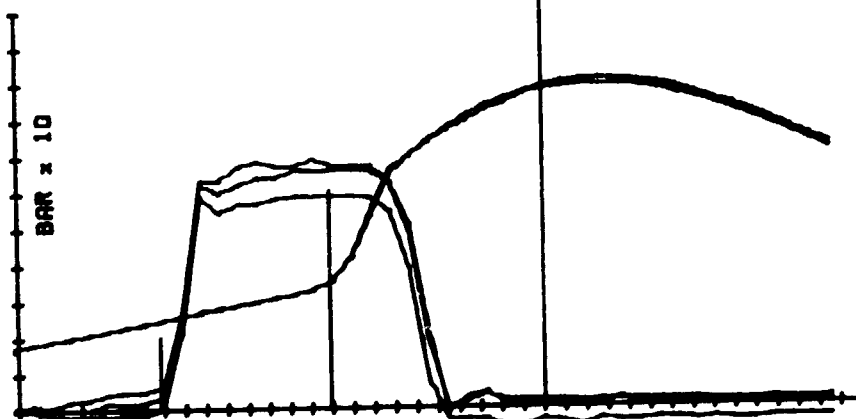

AVERAGE
 TORQUE : 146
 R.P.M. : 848
 START OF
 INJN. : 18.2
 COMBN. : 10.1
 DELAY
 DEGREES : 8.1
 MS : 1.591
 MAXIMUM
 PRESSURE: 69.8
 RATE : 12.1
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 312


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E20
CAPACITY : 2880	C.V. : 38
TEST ID. : UNIDO-1	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP7	




AVERAGE
 TORQUE : 3
 R.P.M. : 632
 START OF
 INJN. : 16.5
 COMMON : 0
 DELAY
 DEGREES : 6.5
 μ S : 1.703
 MAXIMUM
 PRESSURE: 52.6
 RATE : 4.8
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 84


ENGINE : FORD 3000	FUEL ID : E20
CAPACITY : 2860	C.V. : 38
TEST ID. : UNIDO-1	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP8	

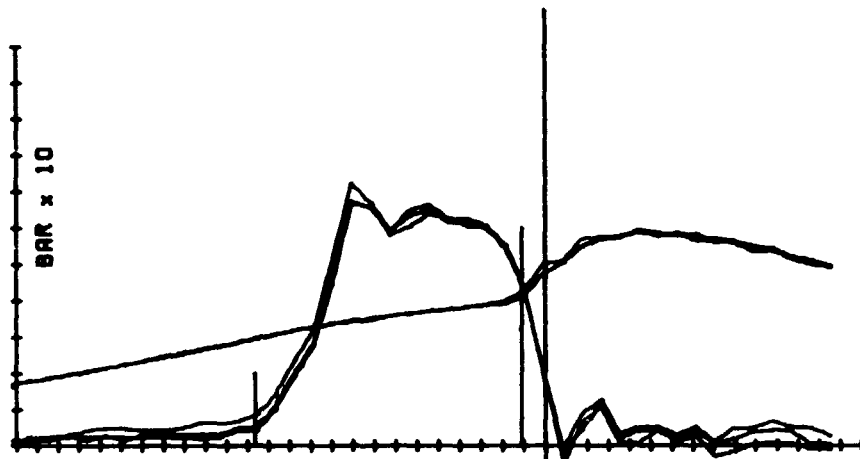

AVERAGE
 TORQUE : 35
 R.P.M. : 2020
 START OF
 INJN. : 13.8
 COMBN. : 1.1
 DELAY
 DEGREES : 12.5
 μS : 1.03
 MAXIMUM
 PRESSURE: 58.8
 RATE : 6.9
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 181

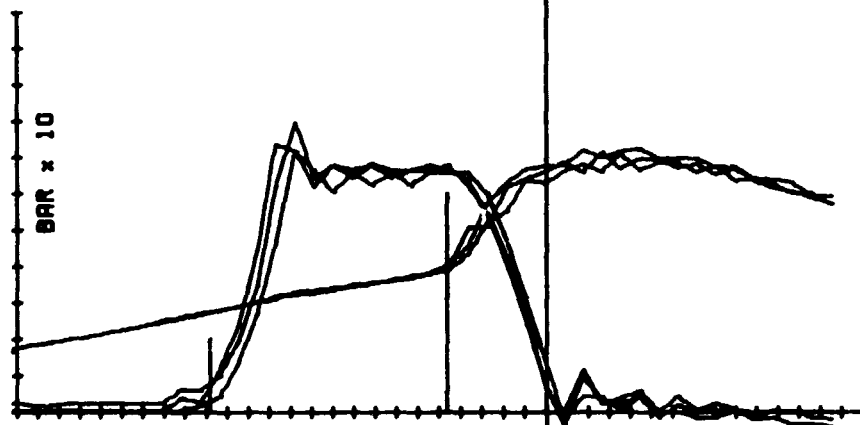


AVERAGE
 TORQUE : 69
 R.P.M. : 2064
 START OF
 INJN. : 15.8
 COMBN. : 4.8
 DELAY
 DEGREES : 11.2
 μS : .902
 MAXIMUM
 PRESSURE: 71.1
 RATE : 9.4
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 277

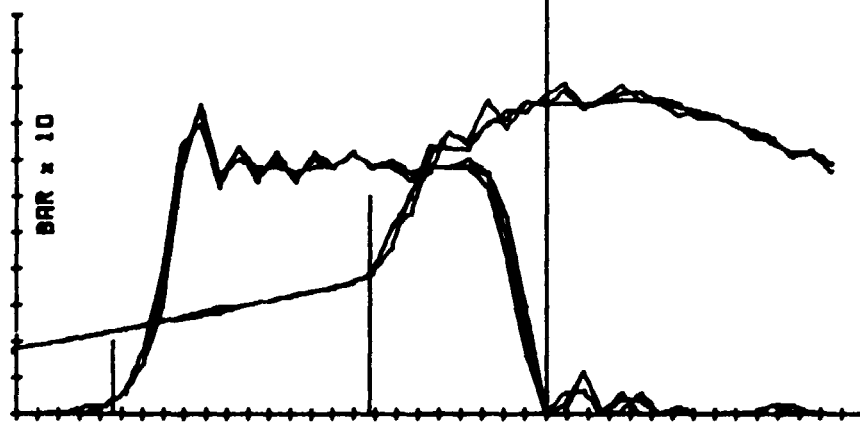


AVERAGE
 TORQUE : 133
 R.P.M. : 2056
 START OF
 INJN. : 20.4
 COMBN. : 8.2
 DELAY
 DEGREES : 12.2
 μS : .988
 MAXIMUM
 PRESSURE: 69.8
 RATE : 14.8
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 384

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/2.6TEGDN
CAPACITY : 2860	C.V. : 38.42
TEST ID. : UNID0-2	DENSITY : .847
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP9	

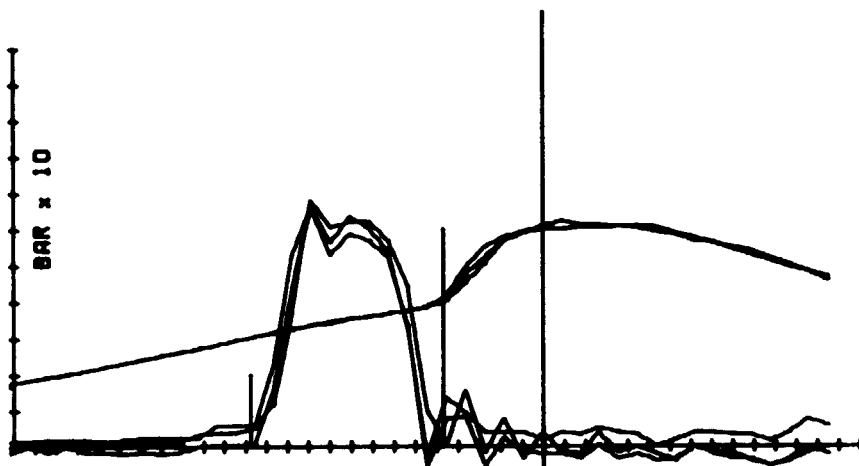

AVERAGE
 TORQUE : 35
 R.P.M. : 1436
 START OF
 INJN. : 13.7
 COMBN. : 4.7
 DELAY
 DEGREES : 9
 μS : 1.049
 MAXIMUM
 PRESSURE: 61.1
 RATE : 6.6
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 153

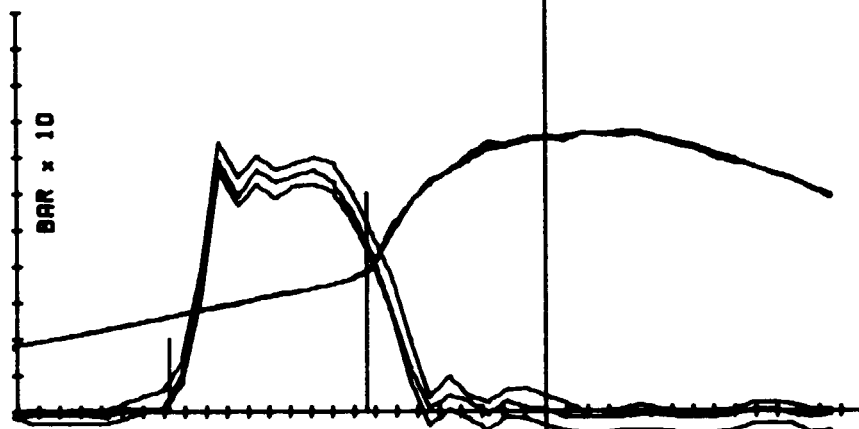


AVERAGE
 TORQUE : 88
 R.P.M. : 1443
 START OF
 INJN. : 17.6
 COMBN. : 6.4
 DELAY
 DEGREES : 9.4
 μS : 1.064
 MAXIMUM
 PRESSURE: 77.2
 RATE : 10.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 226

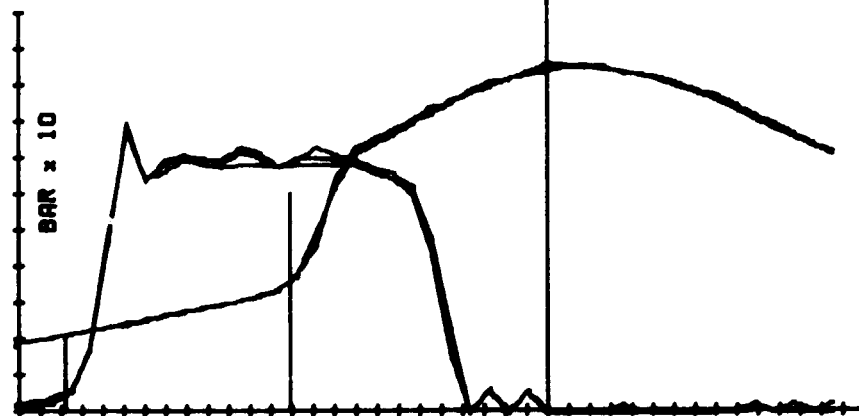


AVERAGE
 TORQUE : 144
 R.P.M. : 1444
 START OF
 INJN. : 22.6
 COMBN. : 12.1
 DELAY
 DEGREES : 10.7
 μS : 1.241
 MAXIMUM
 PRESSURE: 85.5
 RATE : 16
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 375

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/2.6TEGDN
CAPACITY : 2660	C.V. : 38.42
TEST ID. : UN100-2	DENSITY : .847
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP10	

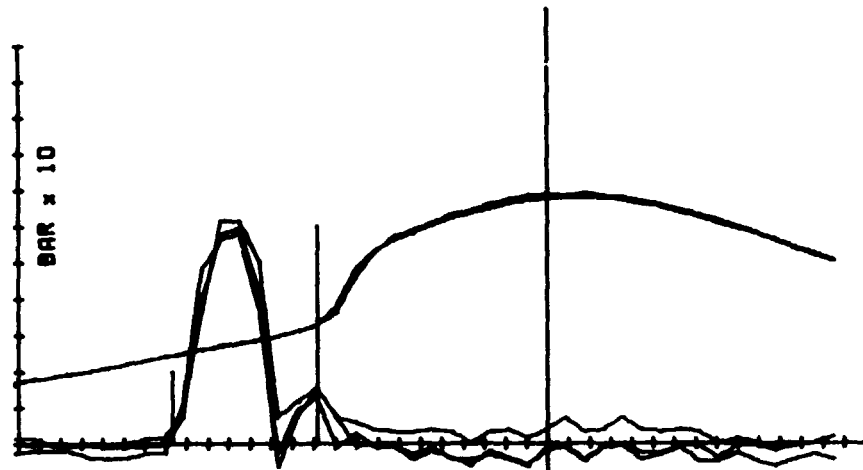

AVERAGE
 TORQUE : 37
 R.P.M. : 848
 START OF
 INJN. : 17.7
 COMBN. : 10.8
 DELAY
 DEGREES : 8.9
 MS : 1.35
 MAXIMUM
 PRESSURE: 68.3
 RATE : 9.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 136

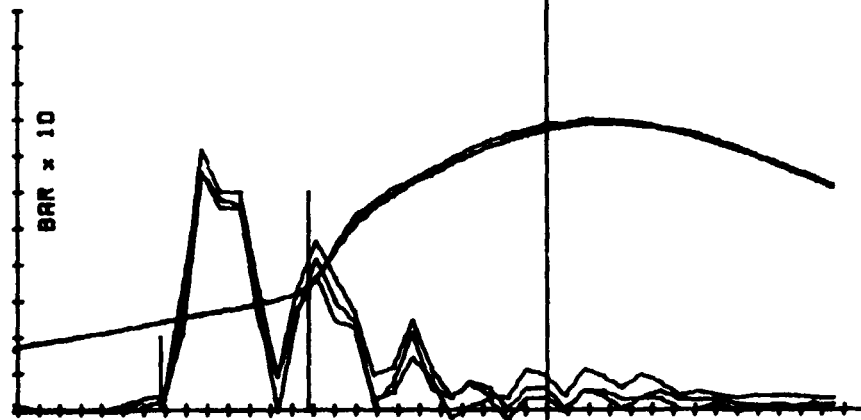


AVERAGE
 TORQUE : 90
 R.P.M. : 822
 START OF
 INJN. : 18.2
 COMBN. : 11.2
 DELAY
 DEGREES : 7
 MS : 1.426
 MAXIMUM
 PRESSURE: 78.9
 RATE : 8.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 205

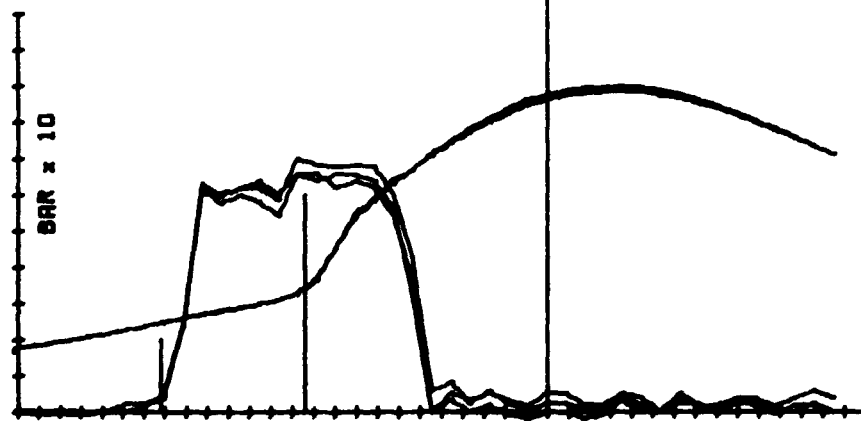

AVERAGE
 TORQUE : 145
 R.P.M. : 836
 START OF
 INJN. : 18.2
 COMBN. : 11.4
 DELAY
 DEGREES : 6.6
 MS : 1.352
 MAXIMUM
 PRESSURE: 89.3
 RATE : 9.2
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 314


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E20/2.6TEGDN
CAPACITY : 2880	C.V. : 38.42
TEST ID. : UN100-2	DENSITY : .847
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP11	

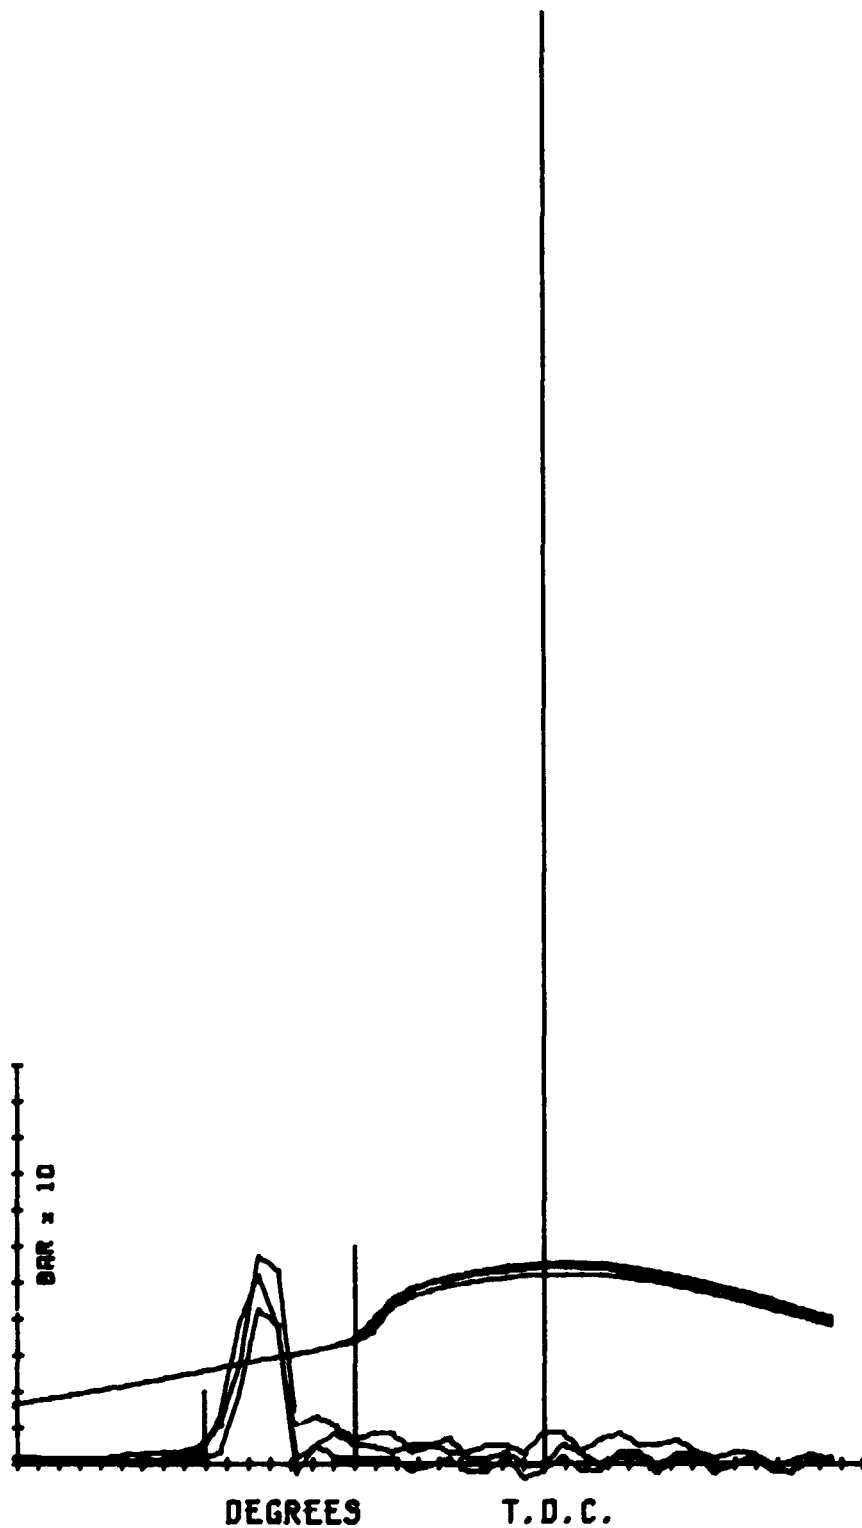


AVERAGE
 TORQUE : 3
 R.P.M. : 629
 START OF
 INJN. : 18.1
 COMBN. : 8
 DELAY
 DEGREES : 7.1
 MS : 1.424
 MAXIMUM
 PRESSURE: 54.4
 RATE : 0.1
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 100


ENGINE : FORD 3000	FUEL ID : E20/2.8TEGDN
CAPACITY : 2860	C.V. : 38.42
TEST ID. : UN100-2	DENSITY : .847
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP12	

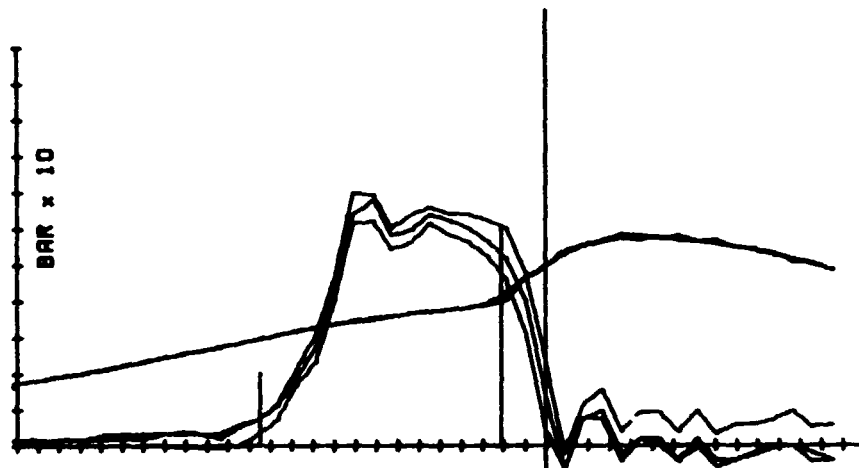

AVERAGE
 TORQUE : 34
 R.P.M. : 2026
 START OF
 INJN. : 13.5
 COMBN. : 2.1
 DELAY
 DEGREES : 11.4
 MS : .936
 MAXIMUM
 PRESSURE: 58.1
 RATE : 5.3
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 180

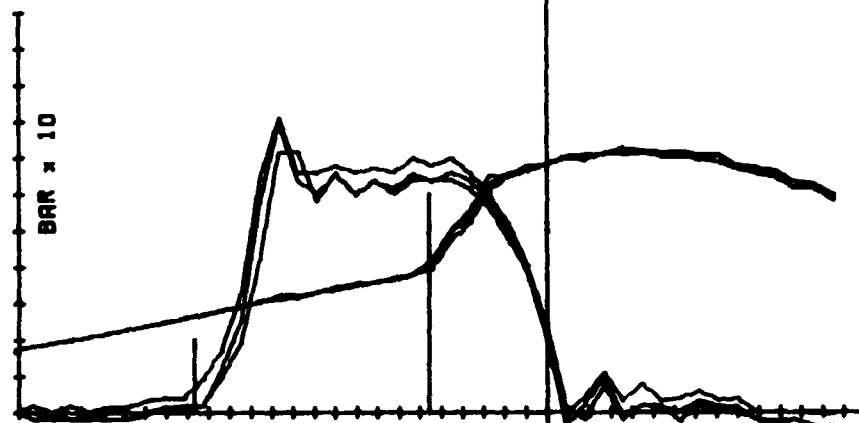


AVERAGE
 TORQUE : 90
 R.P.M. : 2100
 START OF
 INJN. : 16.6
 COMBN. : 5.5
 DELAY
 DEGREES : 11.1
 MS : .88
 MAXIMUM
 PRESSURE: 72.2
 RATE : 6.9
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 205

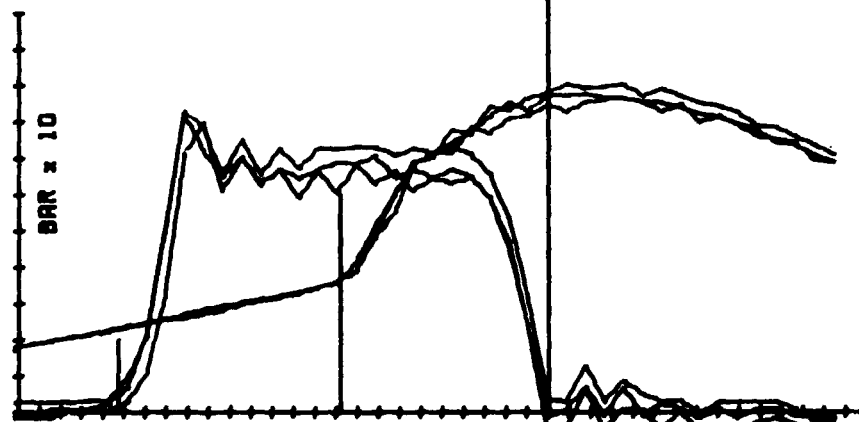


AVERAGE
 TORQUE : 138
 R.P.M. : 2015
 START OF
 INJN. : 20.3
 COMBN. : 9.6
 DELAY
 DEGREES : 10.5
 MS : .688
 MAXIMUM
 PRESSURE: 66.6
 RATE : 11.5
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 393

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/5.2TEGDN
CAPACITY : 2860	C.V. : 38.29
TEST ID. : UNIDO-4	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP13	

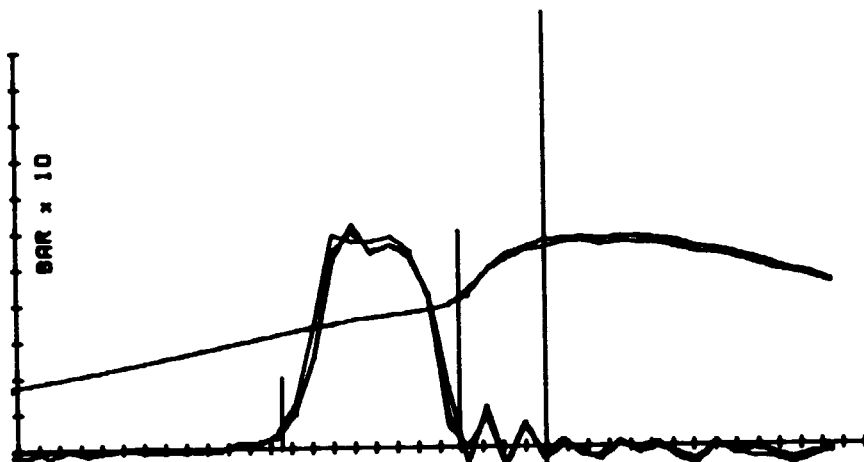

AVERAGE
 TORQUE : 35
 R.P.M. : 1438
 START OF
 INJN. : 12.4
 COMON. : 4
 DELAY
 DEGREES : 8.4
 MS : .97
 MAXIMUM
 PRESSURE: 58.1
 RATE : 5.7
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 152

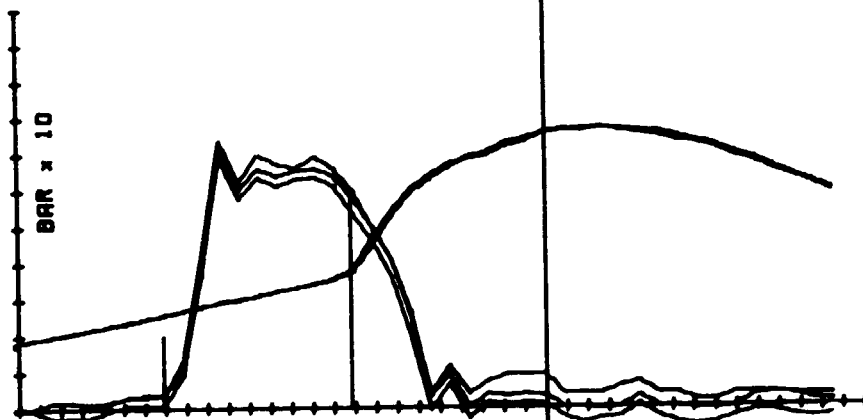


AVERAGE
 TORQUE : 69
 R.P.M. : 1443
 START OF
 INJN. : 18.1
 COMON. : 9.2
 DELAY
 DEGREES : 8.9
 MS : 1.032
 MAXIMUM
 PRESSURE: 77.3
 RATE : 8.6
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 231

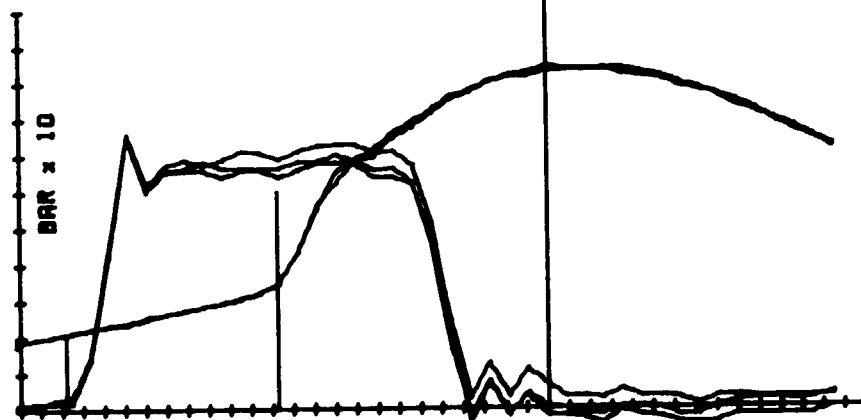


AVERAGE
 TORQUE : 148
 R.P.M. : 1437
 START OF
 INJN. : 22.8
 COMON. : 12.7
 DELAY
 DEGREES : 10.1
 MS : 1.188
 MAXIMUM
 PRESSURE: 94.4
 RATE : 12.3
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 377

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/5.2TEGDN
CAPACITY : 2860	C.V. : 38.29
TEST ID. : UNID0-4	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP14

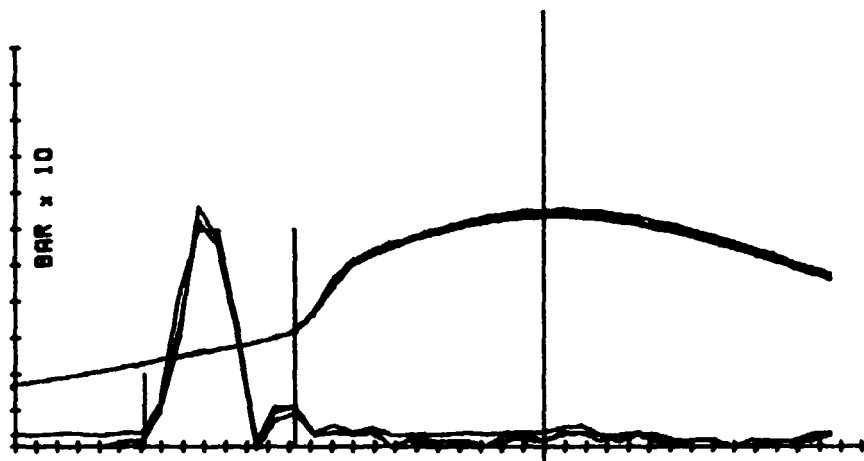

AVERAGE
 TORQUE : 37
 R.P.M. : 625
 START OF
 INJN. : 16.6
 COMON. : 11.7
 DELAY
 DEGREES : 7.1
 μS : 1.433
 MAXIMUM
 PRESSURE: 65
 RATE : 6.5
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 133

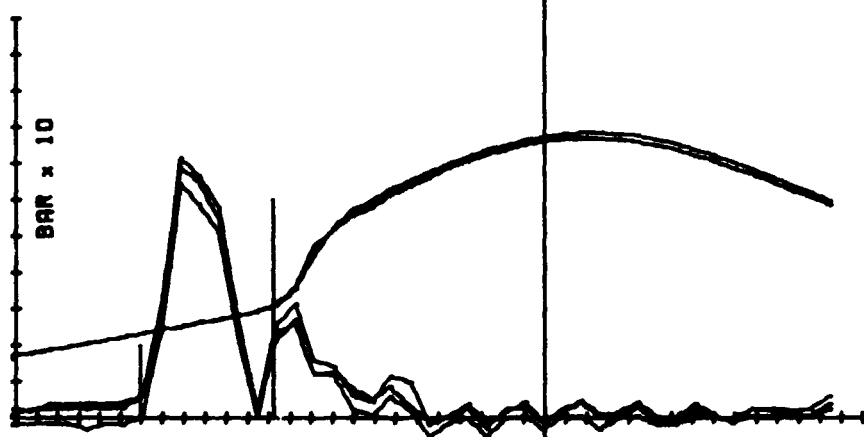


AVERAGE
 TORQUE : 93
 R.P.M. : 629
 START OF
 INJN. : 19
 COMON. : 12.7
 DELAY
 DEGREES : 6.3
 μS : 1.266
 MAXIMUM
 PRESSURE: 77.6
 RATE : 9.7
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 198

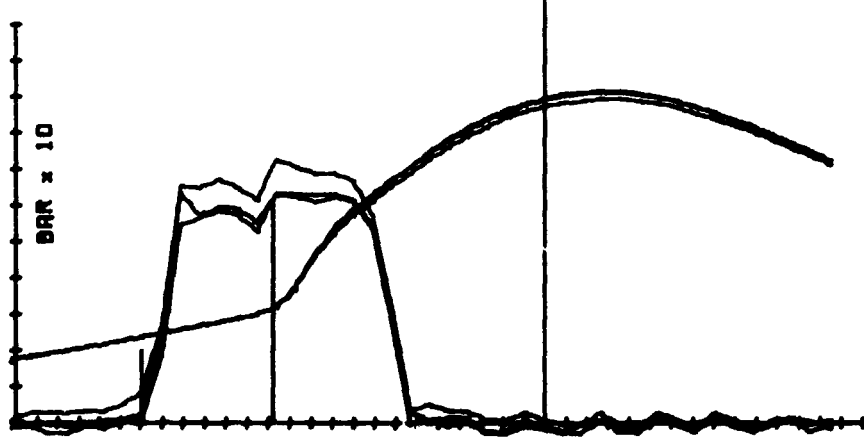

AVERAGE
 TORQUE : 147
 R.P.M. : 630
 START OF
 INJN. : 16.8
 COMON. : 12.6
 DELAY
 DEGREES : 6.1
 μS : 1.24
 MAXIMUM
 PRESSURE: 90.6
 RATE : 9.5
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 315


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E20/5.2TEGDN
CAPACITY : 2660	C.V. : 38.29
TEST ID. : UNID0-4	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP15	

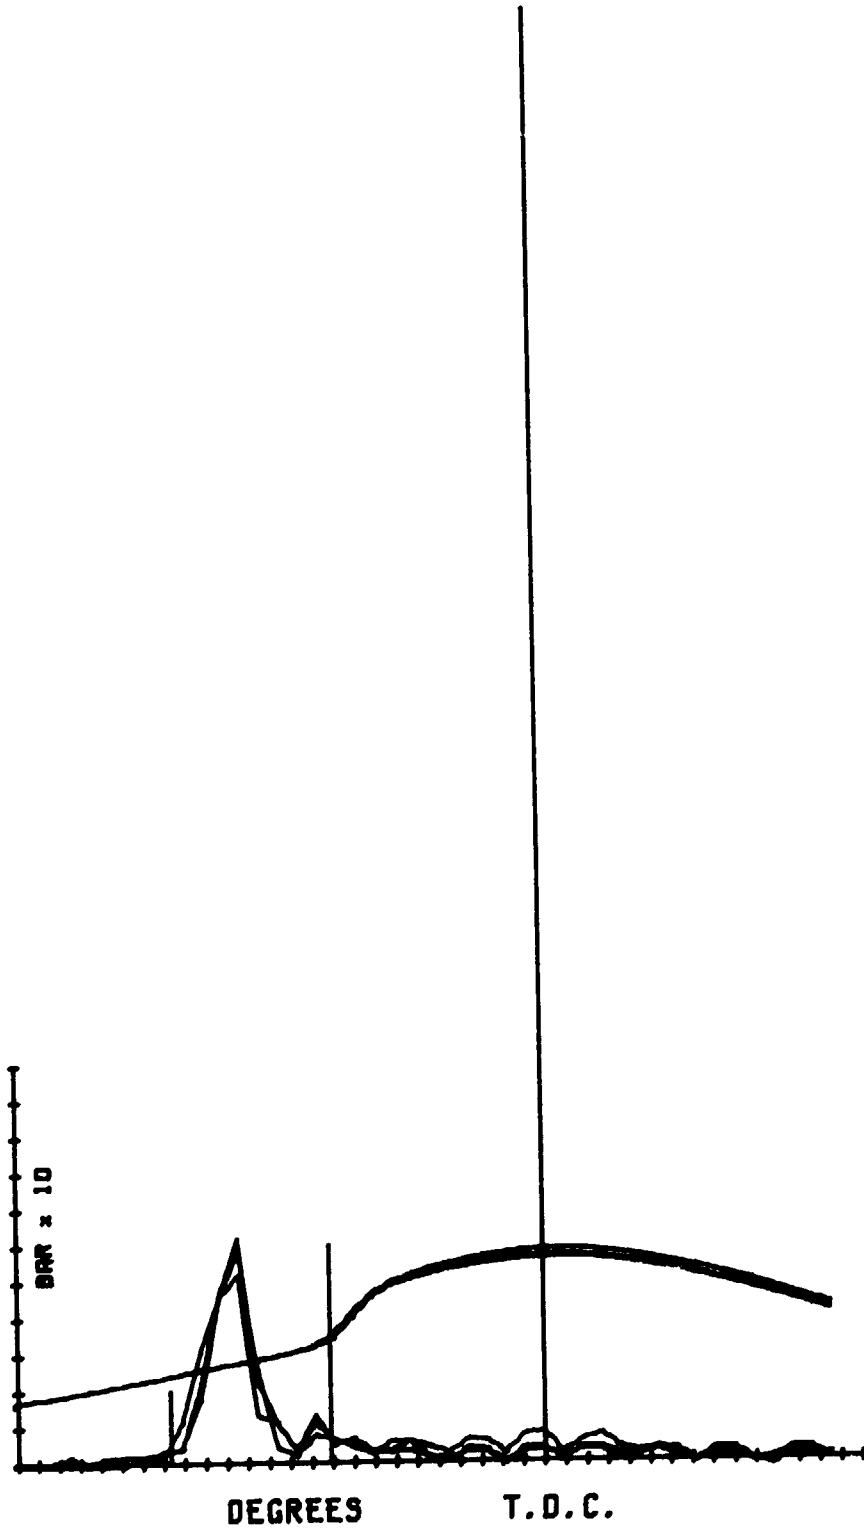

AVERAGE
 TORQUE : 3
 R.P.M. : 827
 START OF
 INJN. : 17.7
 COMBN. : 10.1
 DELAY
 DEGREES : 7.8
 MS : 1.52
 MAXIMUM
 PRESSURE: 58.5
 RATE : 5.7
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 87


ENGINE : FORD 3000	FUEL ID : E20/5.2TEGDN
CAPACITY : 2860	C.V. : 38.29
TEST ID. : UN100-4	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP16	

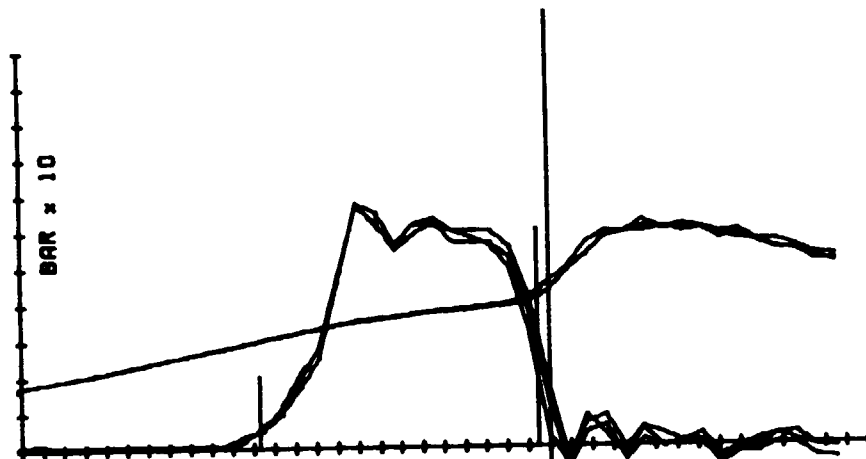

AVERAGE
 TORQUE : 36
 R.P.M. : 2017
 START OF
 INJN. : 13.7
 COMBN. : .5
 DELAY
 DEGREES : 13.2
 MS : 1.088
 MAXIMUM
 PRESSURE: 61.3
 RATE : 8.2
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 190




AVERAGE
 TORQUE : 87
 R.P.M. : 2017
 START OF
 INJN. : 15.6
 COMBN. : 3.7
 DELAY
 DEGREES : 11.9
 MS : .98
 MAXIMUM
 PRESSURE: 72.3
 RATE : 10.4
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 267

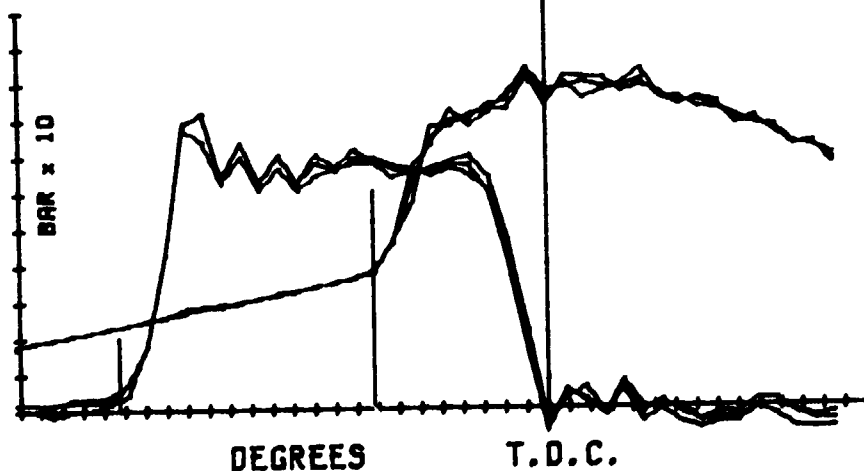


AVERAGE
 TORQUE : 139
 R.P.M. : 2017
 START OF
 INJN. : 20.3
 COMBN. : 8.2
 DELAY
 DEGREES : 12.1
 MS : .897
 MAXIMUM
 PRESSURE: 92.4
 RATE : 17.7
 TEMPERATURES
 AIR INLET: 34
 EXHAUST : 390

ENGINE : FORD 3000	FUEL ID : E20/.210N
CAPACITY : 2860	C.V. : 38
TEST ID. : UNID0-5	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP17

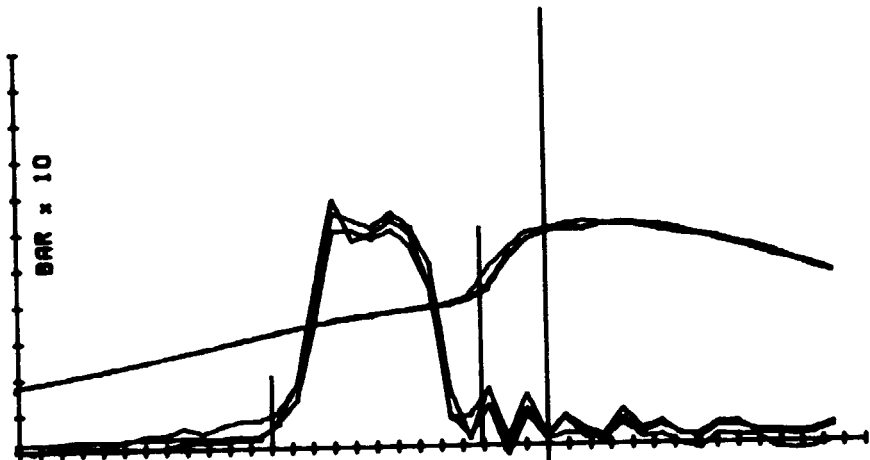

AVERAGE
 TORQUE : 35
 R.P.M. : 1422
 START OF
 INJN. : 13
 COMBN. : 3.1
 DELAY
 DEGREES : 9.9
 MS : 1.155
 MAXIMUM
 PRESSURE: 61
 RATE : 7.7
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 151

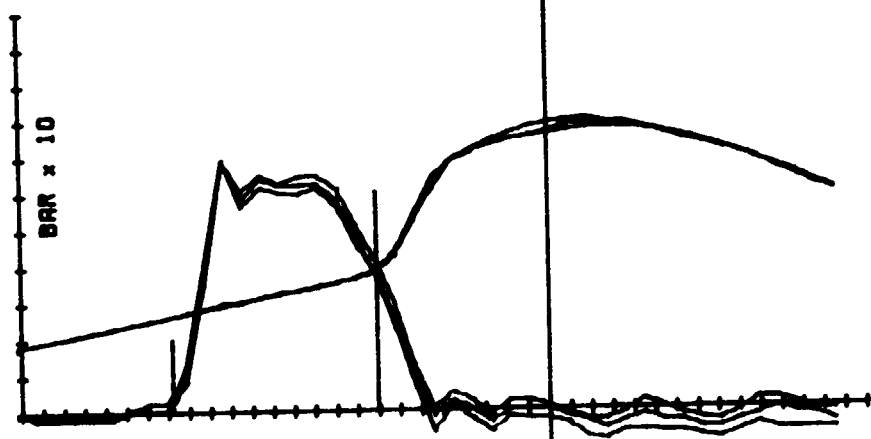


AVERAGE
 TORQUE : 89
 R.P.M. : 1436
 START OF
 INJN. : 17.8
 COMBN. : 8.1
 DELAY
 DEGREES : 9.7
 MS : 1.13
 MAXIMUM
 PRESSURE: 78.6
 RATE : 10.8
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 224




AVERAGE
 TORQUE : 147
 R.P.M. : 1456
 START OF
 INJN. : 22.6
 COMBN. : 11.
 DELAY
 DEGREES : 11.5
 MS : 1.312
 MAXIMUM
 PRESSURE: 98.3
 RATE : 19.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 370

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E20/.210N
CAPACITY : 2860	C.V. : 38
TEST ID. : UN100-5	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP18	

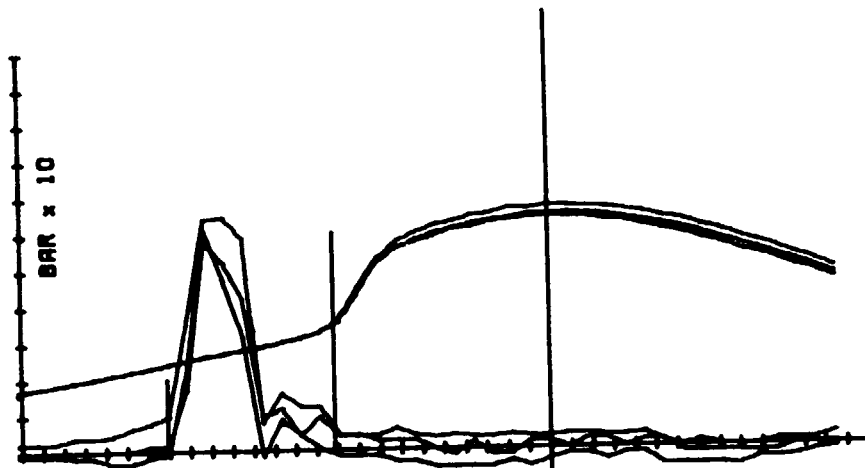

AVERAGE
 TORQUE : 36
 R.P.M. : 827
 START OF
 INJN. : 10.1
 COMON. : 10.1
 DELAY
 DEGREES : 8
 MS : 1.589
 MAXIMUM
 PRESSURE: 65.6
 RATE : 6.9
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 129

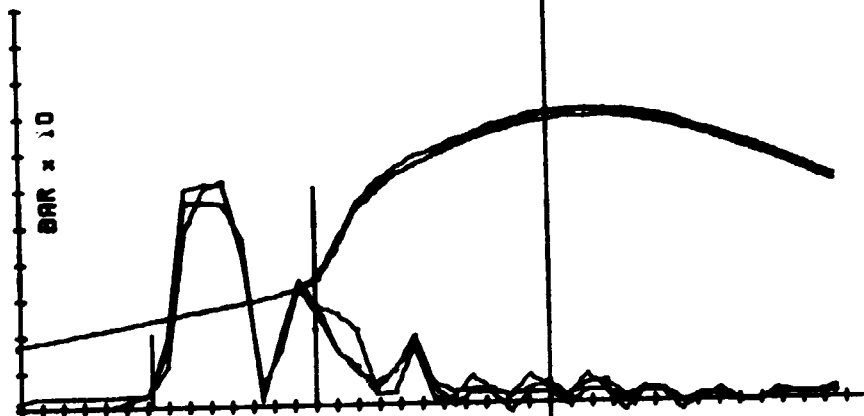


AVERAGE
 TORQUE : 93
 R.P.M. : 832
 START OF
 INJN. : 10.6
 COMON. : 11
 DELAY
 DEGREES : 7.8
 MS : 1.565
 MAXIMUM
 PRESSURE: 79.5
 RATE : 10.3
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 201



AVERAGE
 TORQUE : 149
 R.P.M. : 838
 START OF
 INJN. : 10.3
 COMON. : 11
 DELAY
 DEGREES : 7.3
 MS : 1.439
 MAXIMUM
 PRESSURE: 81.5
 RATE : 11
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 317


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E20/.210N
CAPACITY : 2860	C.V. : 38
TEST ID. : UN100-5	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP19

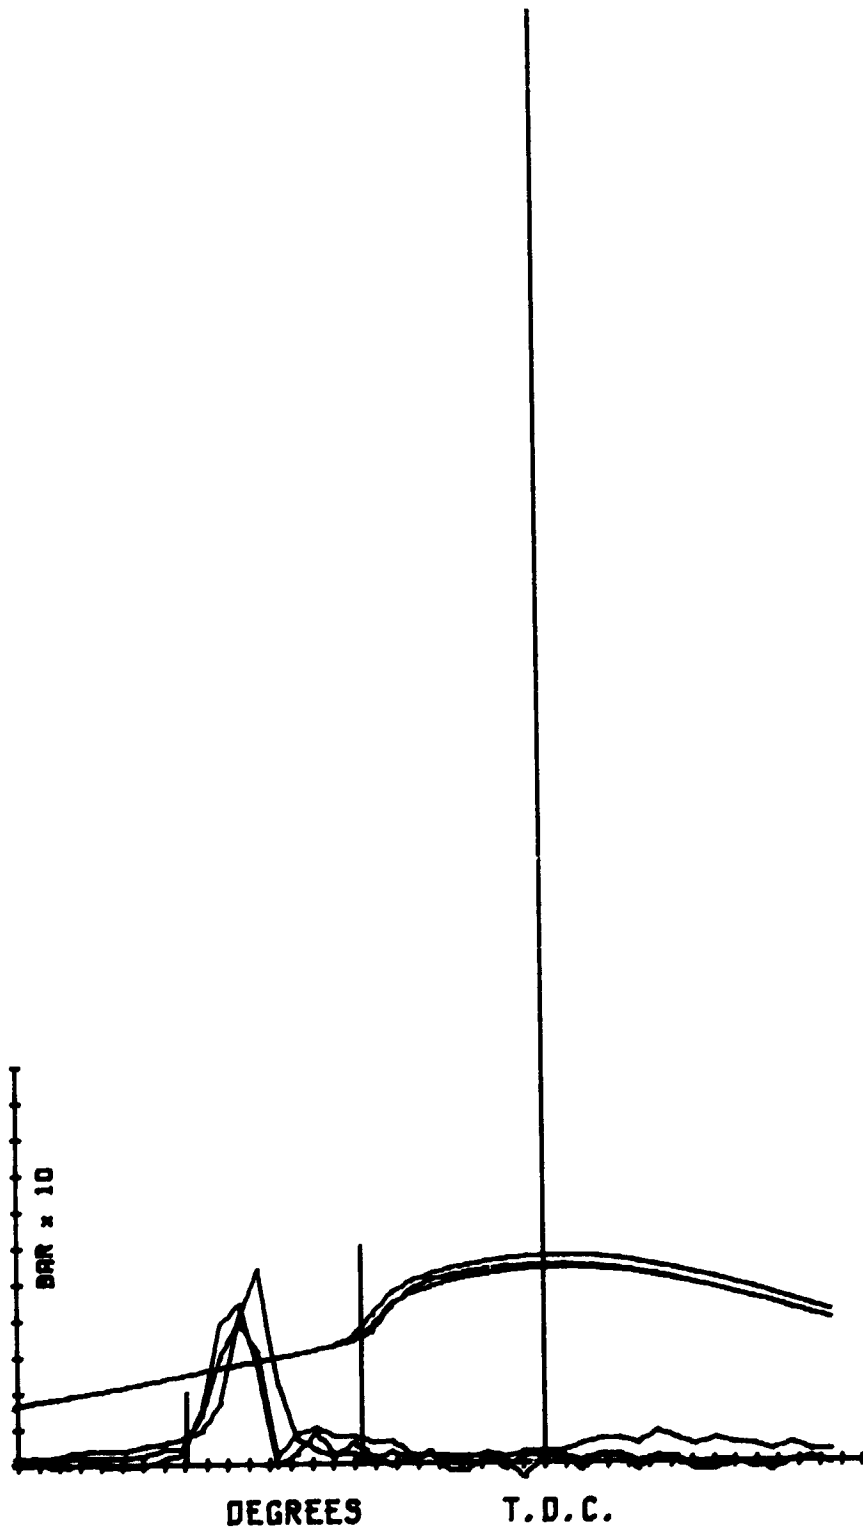


AVERAGE
 TORQUE : 3
 R.P.M. : 821
 START OF
 INJN. : 18.8
 COMON. : 8.7
 DELAY
 DEGREES : 8.2
 ΔS : 1.678
 MAXIMUM
 PRESSURE: 55.8
 RATE : 8.5
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 84


ENGINE : FORD 3000	FUEL ID : E20/.210N
CAPACITY : 2860	C.V. : 38
TEST ID. : UN100-5	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP20	

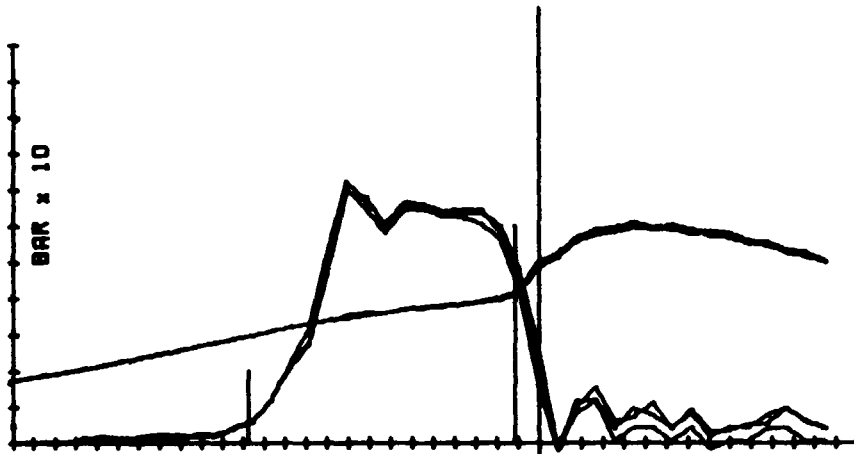

AVERAGE
 TORQUE : 34
 R.P.M. : 2042
 START OF
 INJN. : 13.7
 COMON. : 1.1
 DELAY
 DEGREES : 12.6
 MS : 1.028
 MAXIMUM
 PRESSURE: 60.5
 RATE : 8.6
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 167

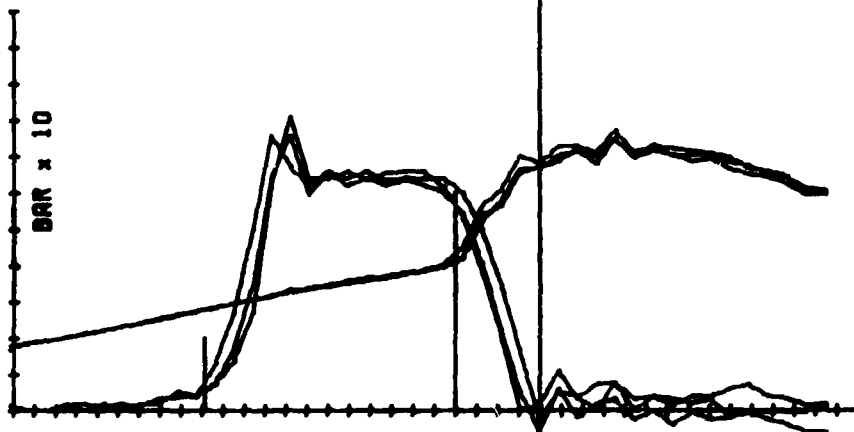


AVERAGE
 TORQUE : 69
 R.P.M. : 2041
 START OF
 INJN. : 15.6
 COMON. : 4
 DELAY
 DEGREES : 11.6
 MS : .966
 MAXIMUM
 PRESSURE: 74.5
 RATE : 9.9
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 269

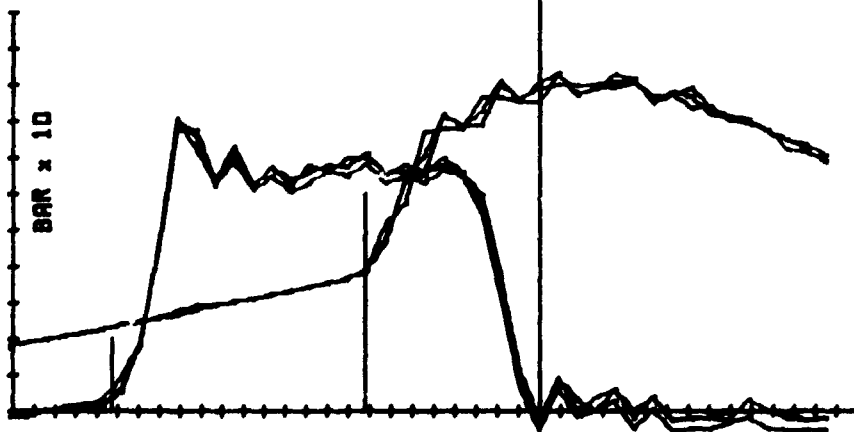


AVERAGE
 TORQUE : 138
 R.P.M. : 2015
 START OF
 INJN. : 20.3
 COMON. : 6.2
 DELAY
 DEGREES : 12.1
 MS : .998
 MAXIMUM
 PRESSURE: 81.9
 RATE : 10.4
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 365

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/.4ION
CAPACITY : 2660	C.V. : 38
TEST ID. : UNID0-6	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP21	

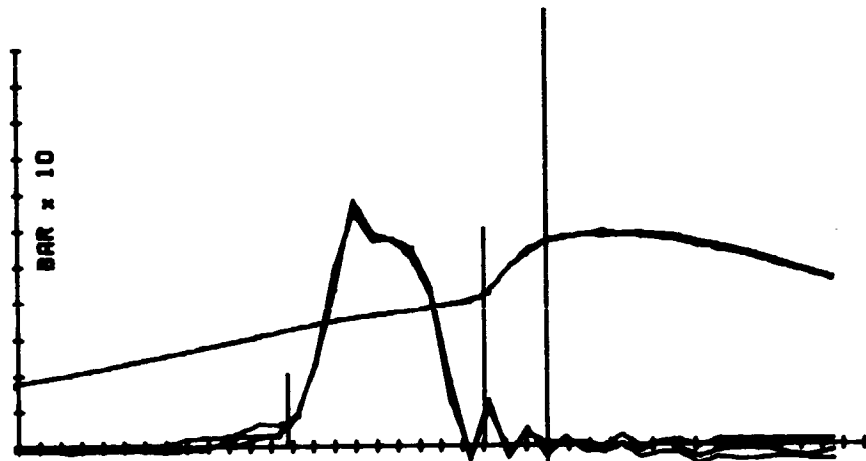

AVERAGE
 TORQUE : 35
 R.P.M. : 1436
 START OF
 INJN. : 12.2
 COMB. : 2.9
 DELAY
 DEGREES : 9.3
 MS : 1.074
 MAXIMUM
 PRESSURE: 58.1
 RATE : 7
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 148

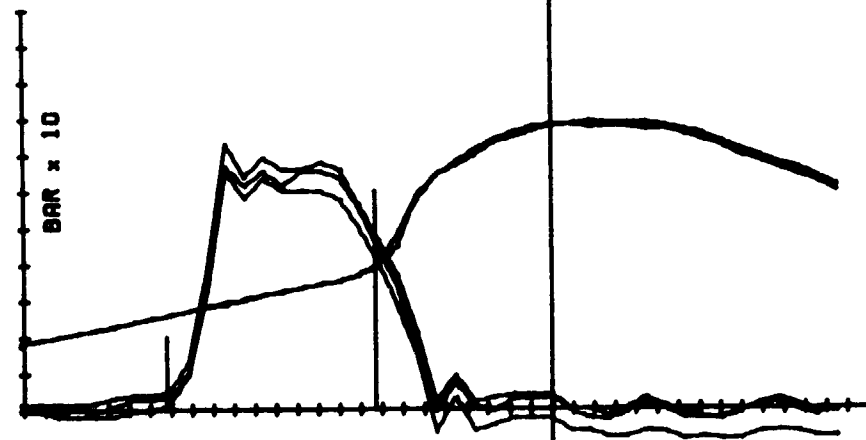


AVERAGE
 TORQUE : 90
 R.P.M. : 1443
 START OF
 INJN. : 18.2
 COMB. : 8.3
 DELAY
 DEGREES : 9.9
 MS : 1.148
 MAXIMUM
 PRESSURE: 78.7
 RATE : 10.9
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 227

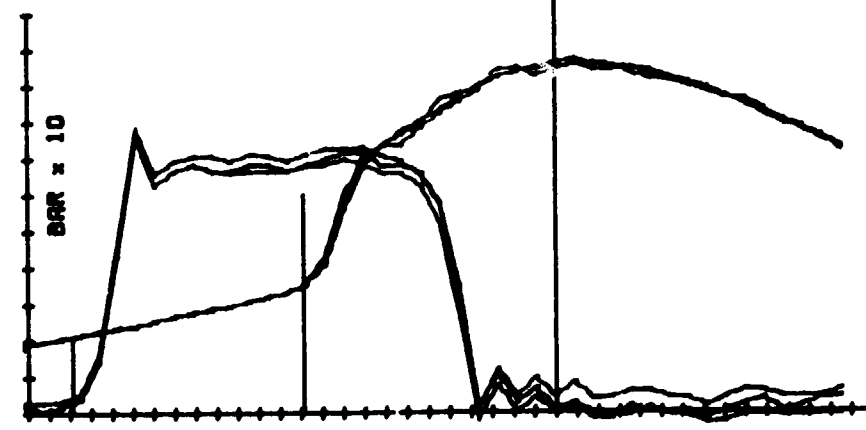


AVERAGE
 TORQUE : 148
 R.P.M. : 1437
 START OF
 INJN. : 22.9
 COMB. : 11.9
 DELAY
 DEGREES : 11
 MS : 1.278
 MAXIMUM
 PRESSURE: 98.9
 RATE : 15.7
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 375

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E20/.410N
CAPACITY : 2880	C.V. : 38
TEST ID. : UN100-8	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP22	

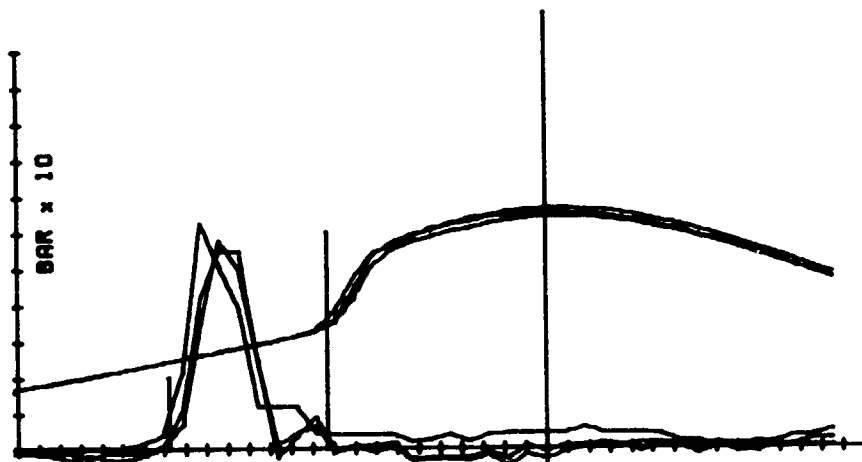

AVERAGE
 TORQUE : 37
 R.P.M. : 833
 START OF
 INJN. : 17.7
 COMBN. : 10.3
 DELAY
 DEGREES : 7.4
 mS : 1.486
 MAXIMUM
 PRESSURE: 85.5
 RATE : 9.1
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 129

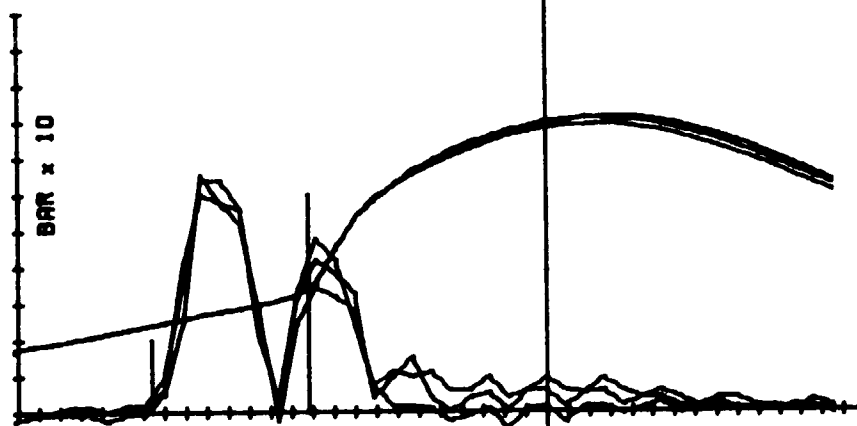

AVERAGE
 TORQUE : 81
 R.P.M. : 823
 START OF
 INJN. : 18.8
 COMBN. : 11.2
 DELAY
 DEGREES : 7.4
 mS : 1.492
 MAXIMUM
 PRESSURE: 80.9
 RATE : 9.1
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 208

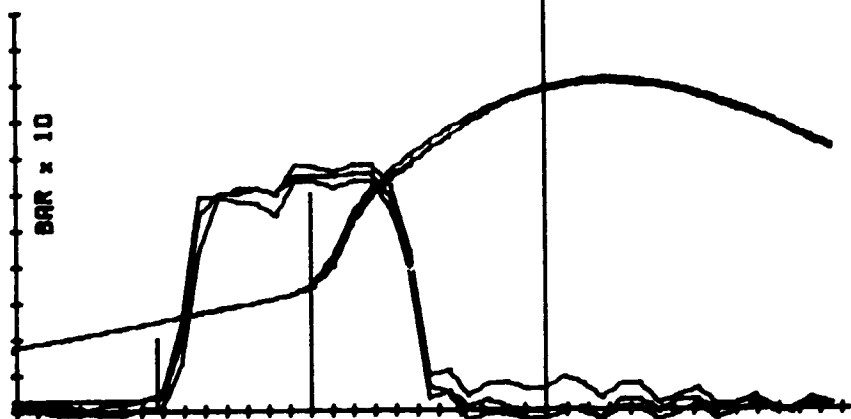


AVERAGE
 TORQUE : 149
 R.P.M. : 836
 START OF
 INJN. : 18.3
 COMBN. : 11
 DELAY
 DEGREES : 7.3
 mS : 1.446
 MAXIMUM
 PRESSURE: 91.3
 RATE : 11.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 313

DEGREES


T.D.C.

ENGINE : FORD 3000	FUEL ID : E20/.4ION
CAPACITY : 2860	C.V. : 38
TEST ID. : UNID0-6	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP23	



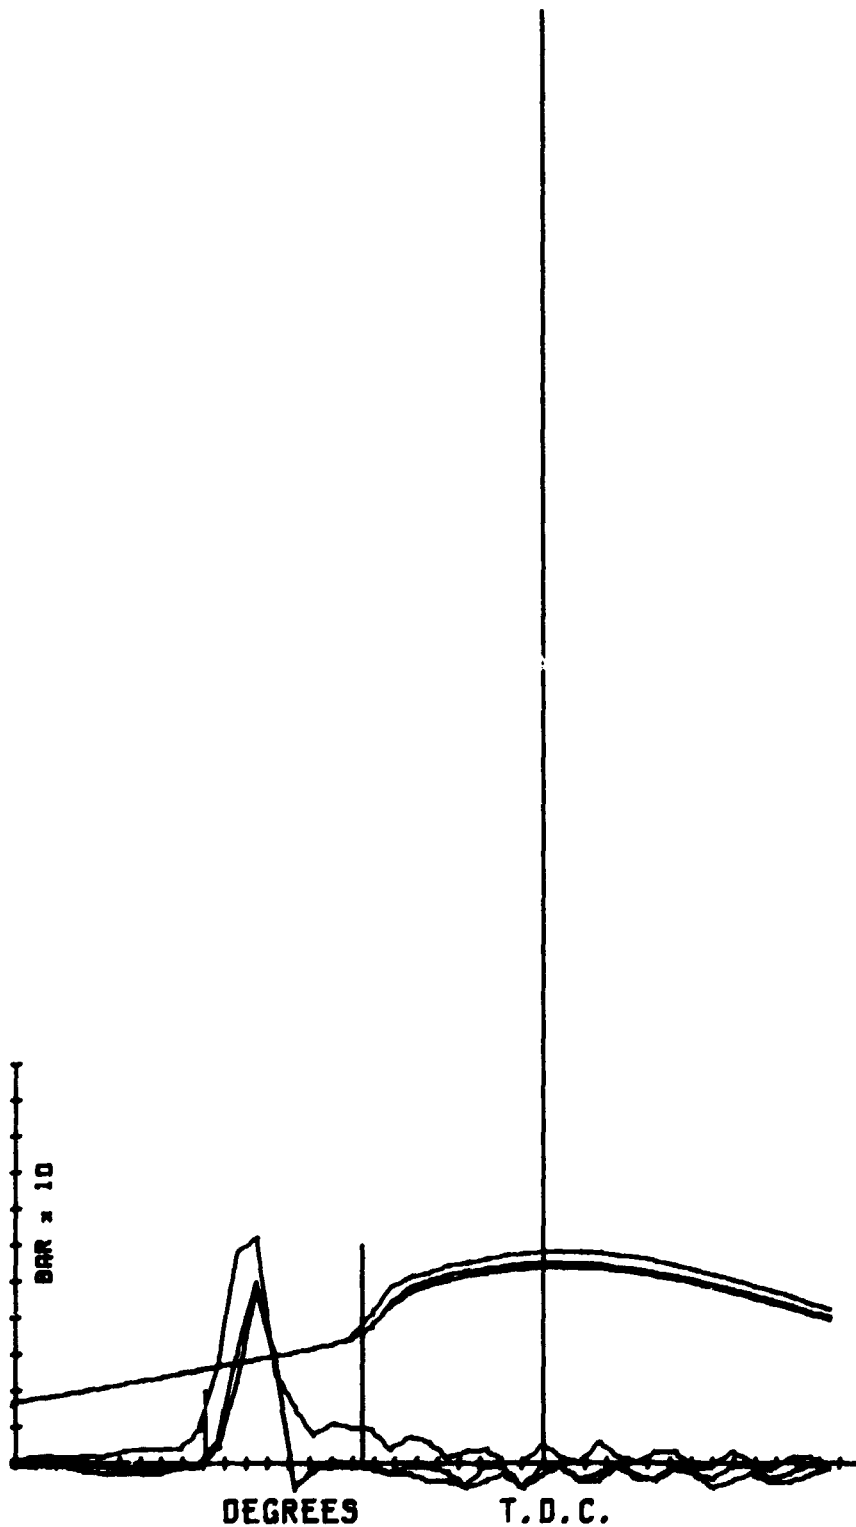


AVERAGE
 TORQUE : 3
 R.P.M. : 622
 START OF
 INJN. : 15.8
 COMB. : 8.5
 DELAY
 DEGREES : 7.4
 ΔS : 1.495
 MAXIMUM
 PRESSURE: 55.2
 RATE : 6.2
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 82


ENGINE : FORD 3000	FUEL ID : E20/.410N
CAPACITY : 2860	C.V. : 38
TEST ID. : UNID0-8	DENSITY : .846
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP24	

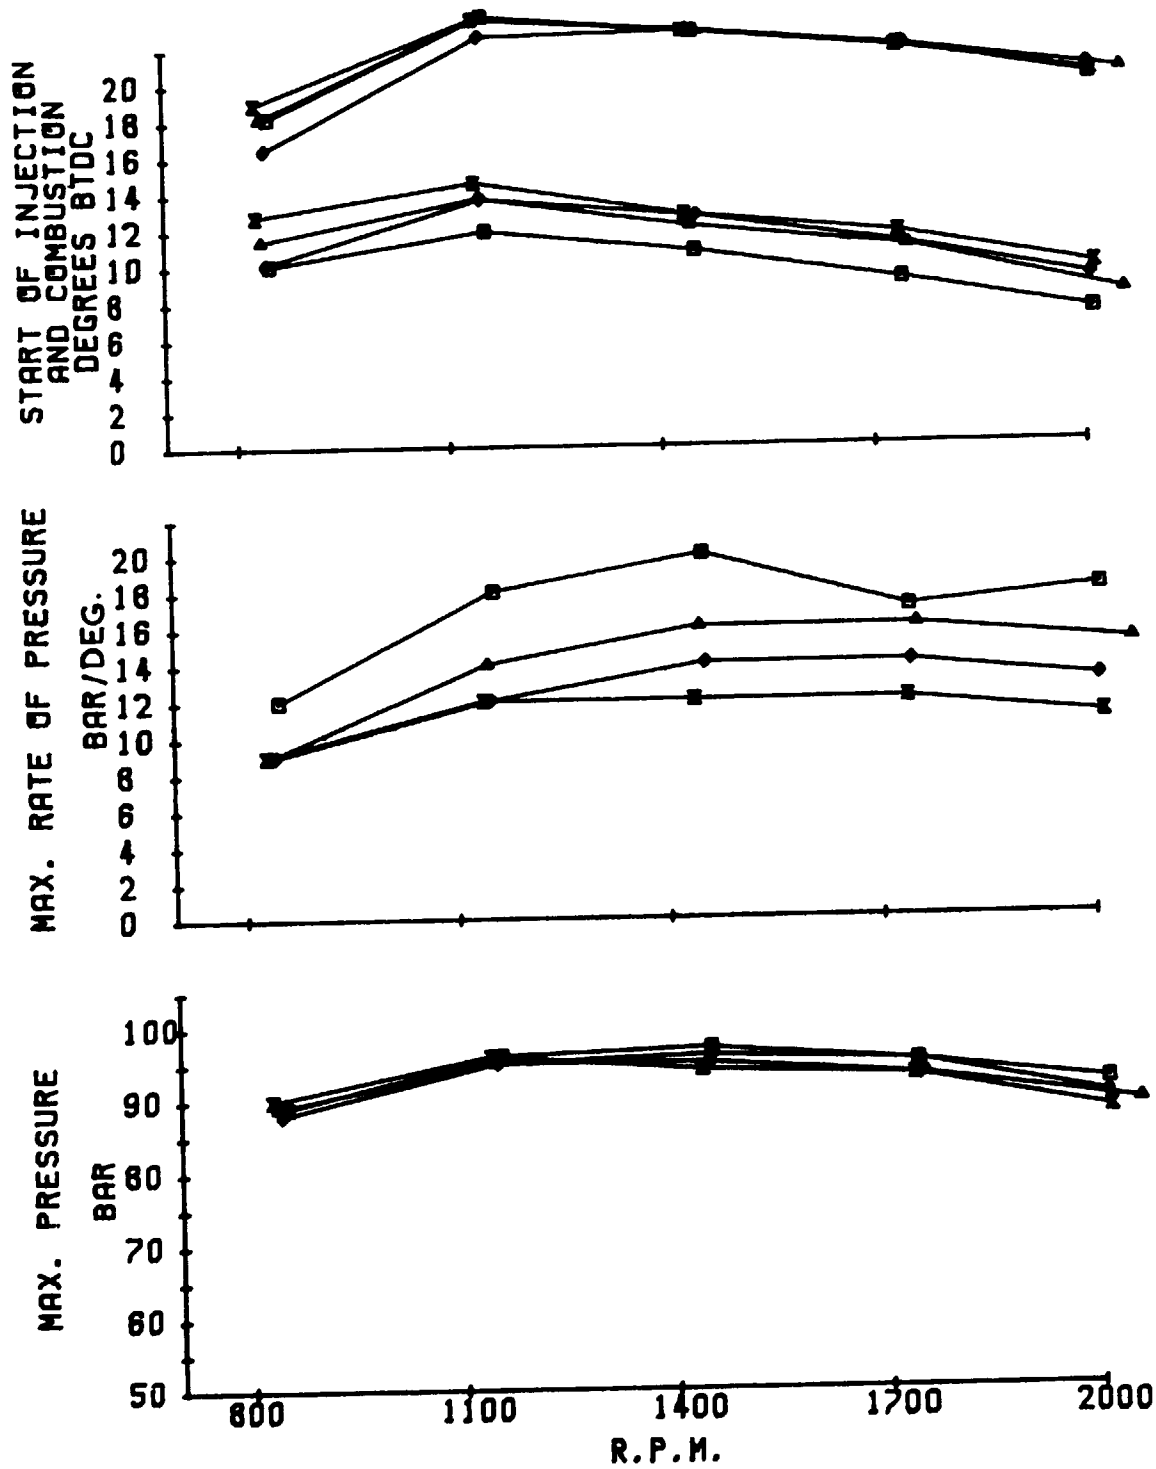


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊠ E20/5.2TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FULL LOAD
FIG AP25	

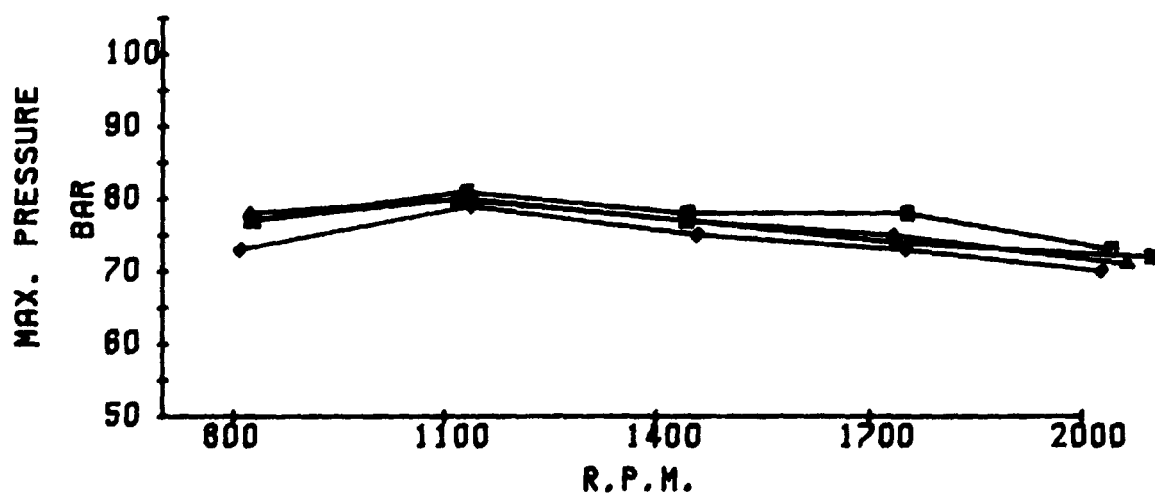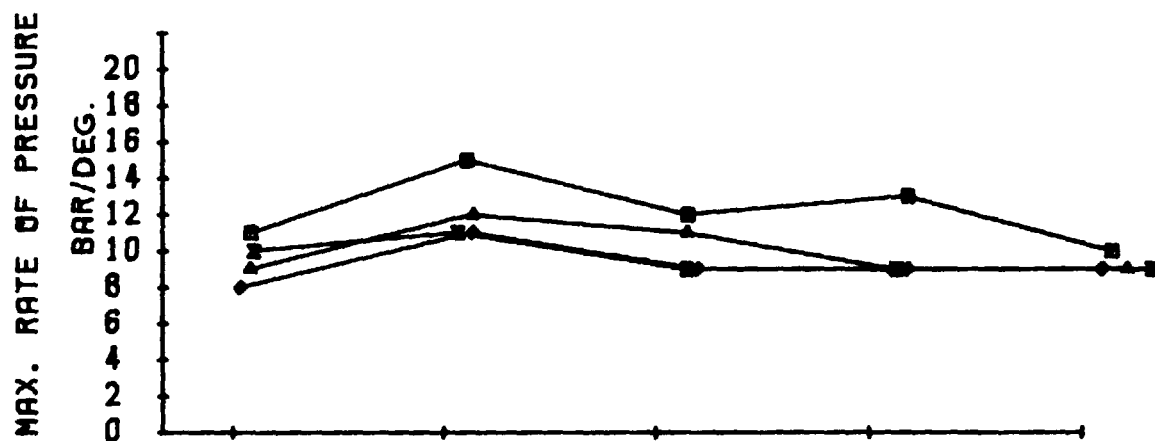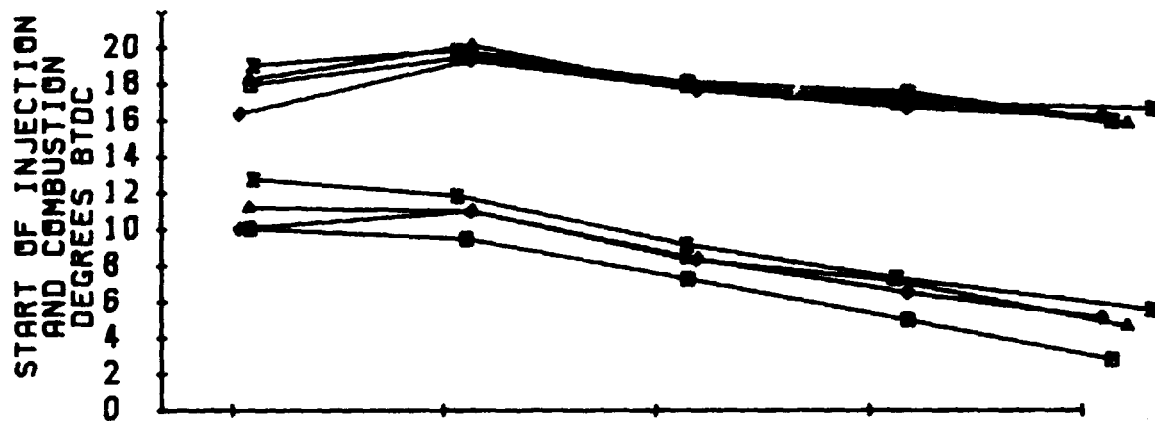


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊠ E20/5.2TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FIG AP26

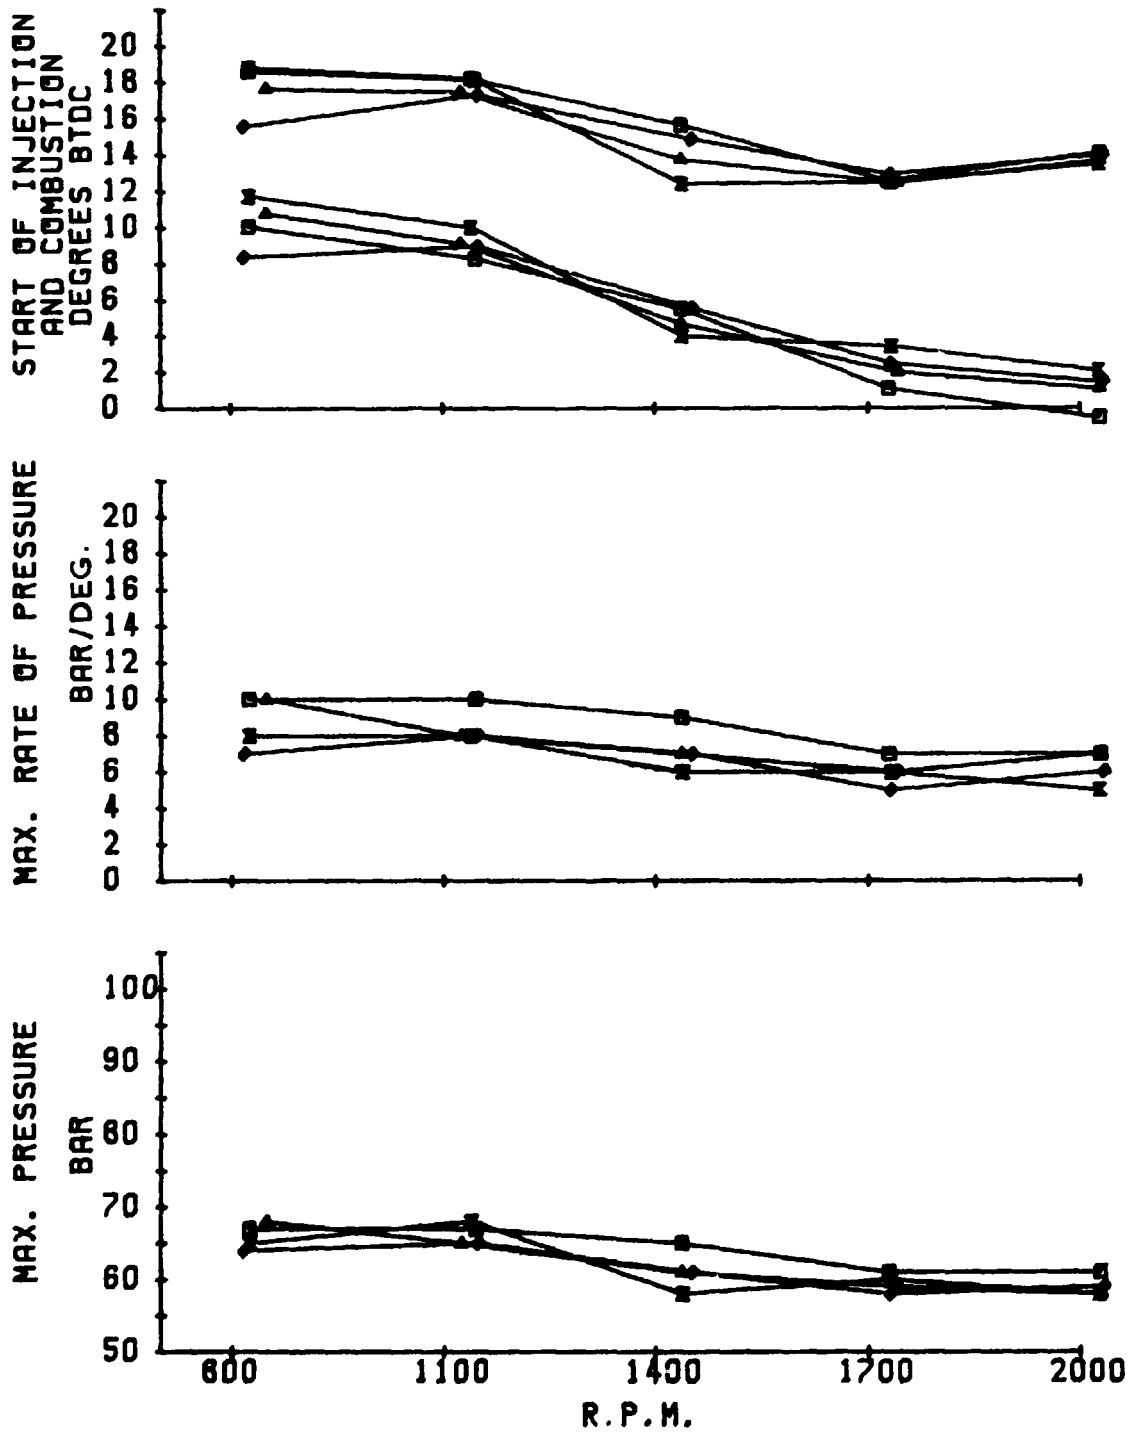


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊠ E20/5.2TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP27	

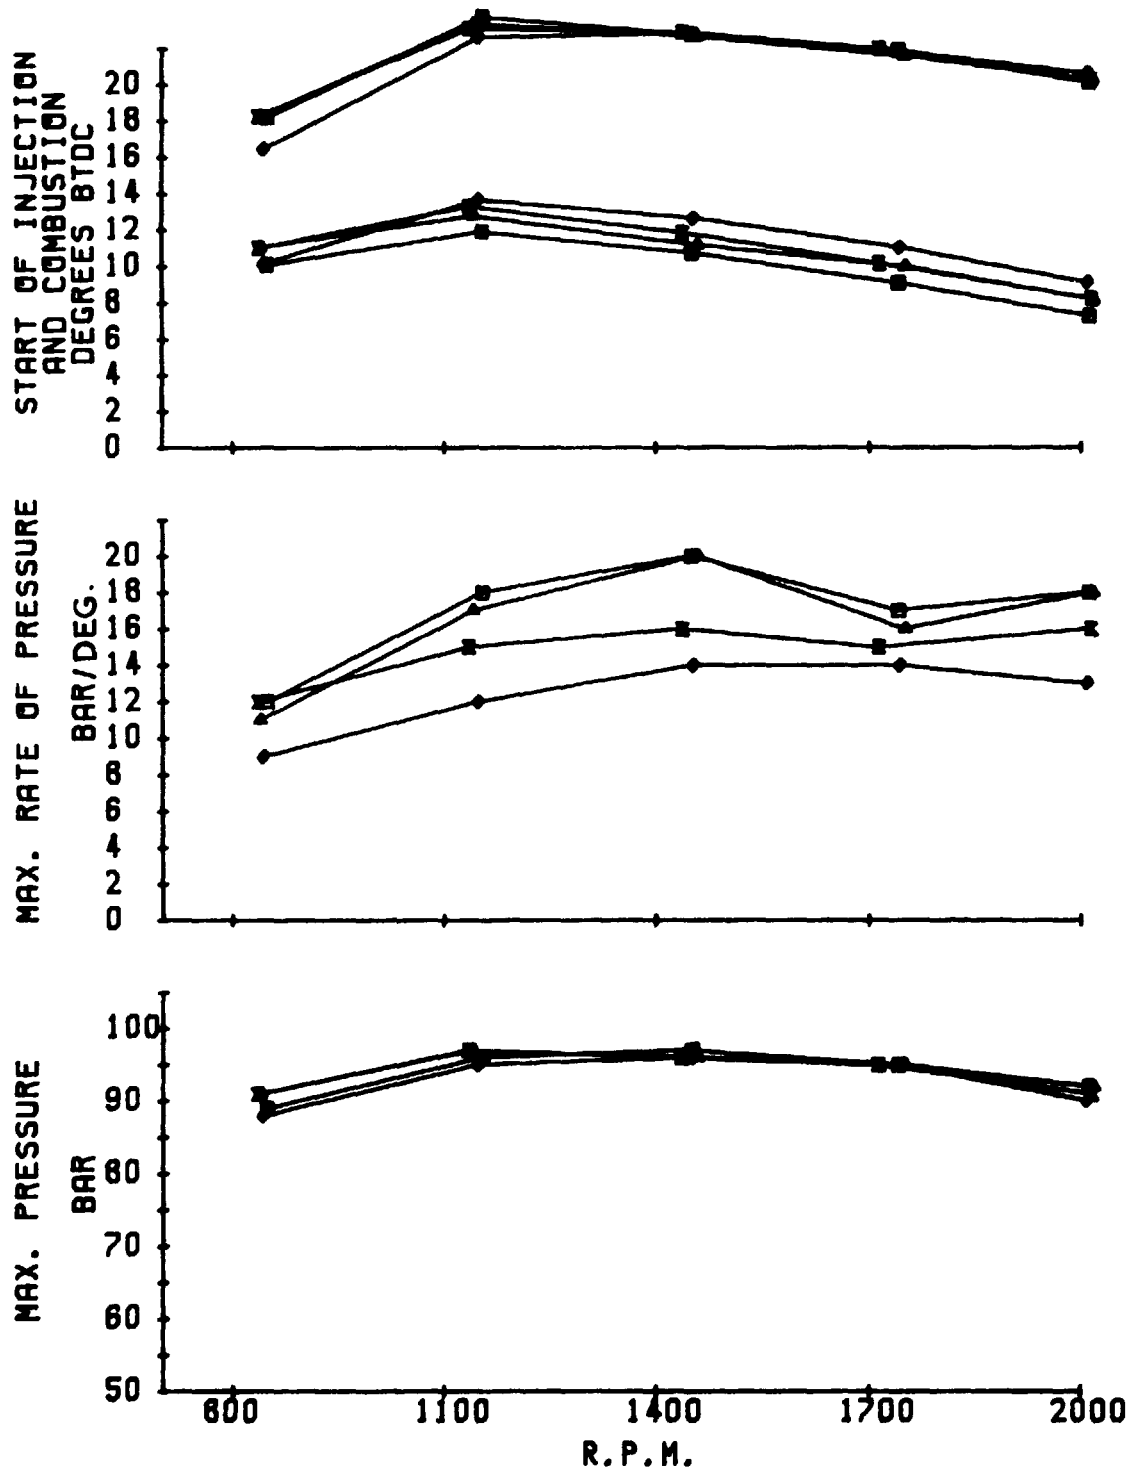


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/.210N × E20/.410N
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP28	

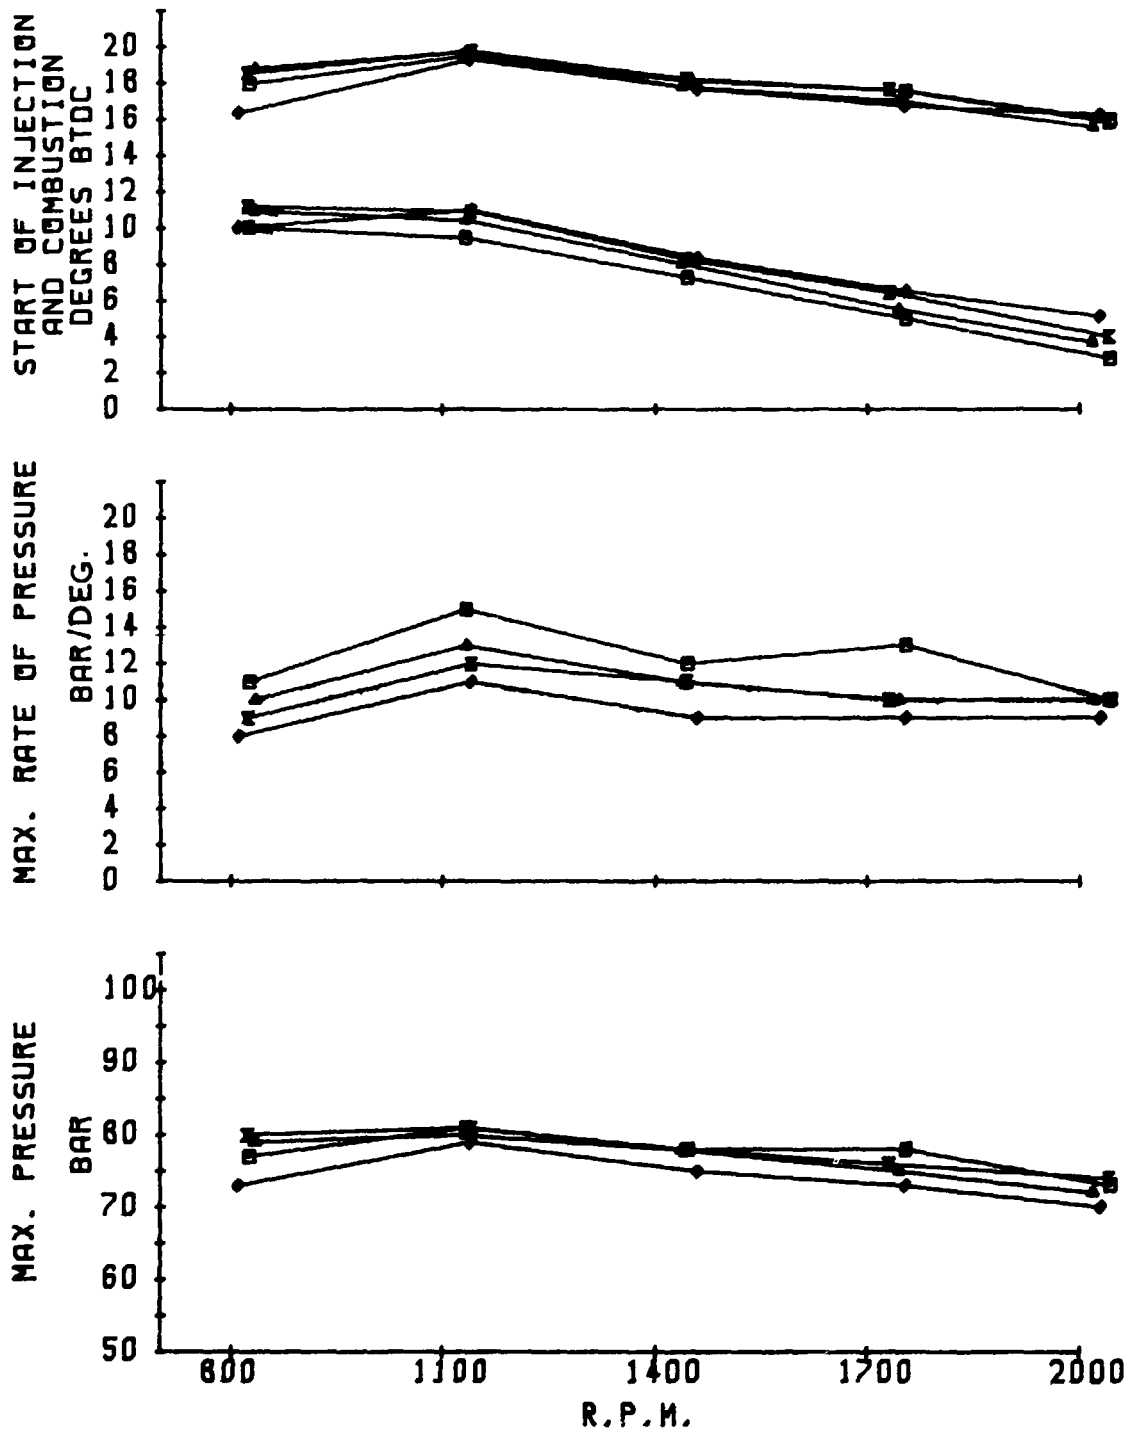


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/.210N × E20/.410N
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	2/3 LOAD
FIG AP29	

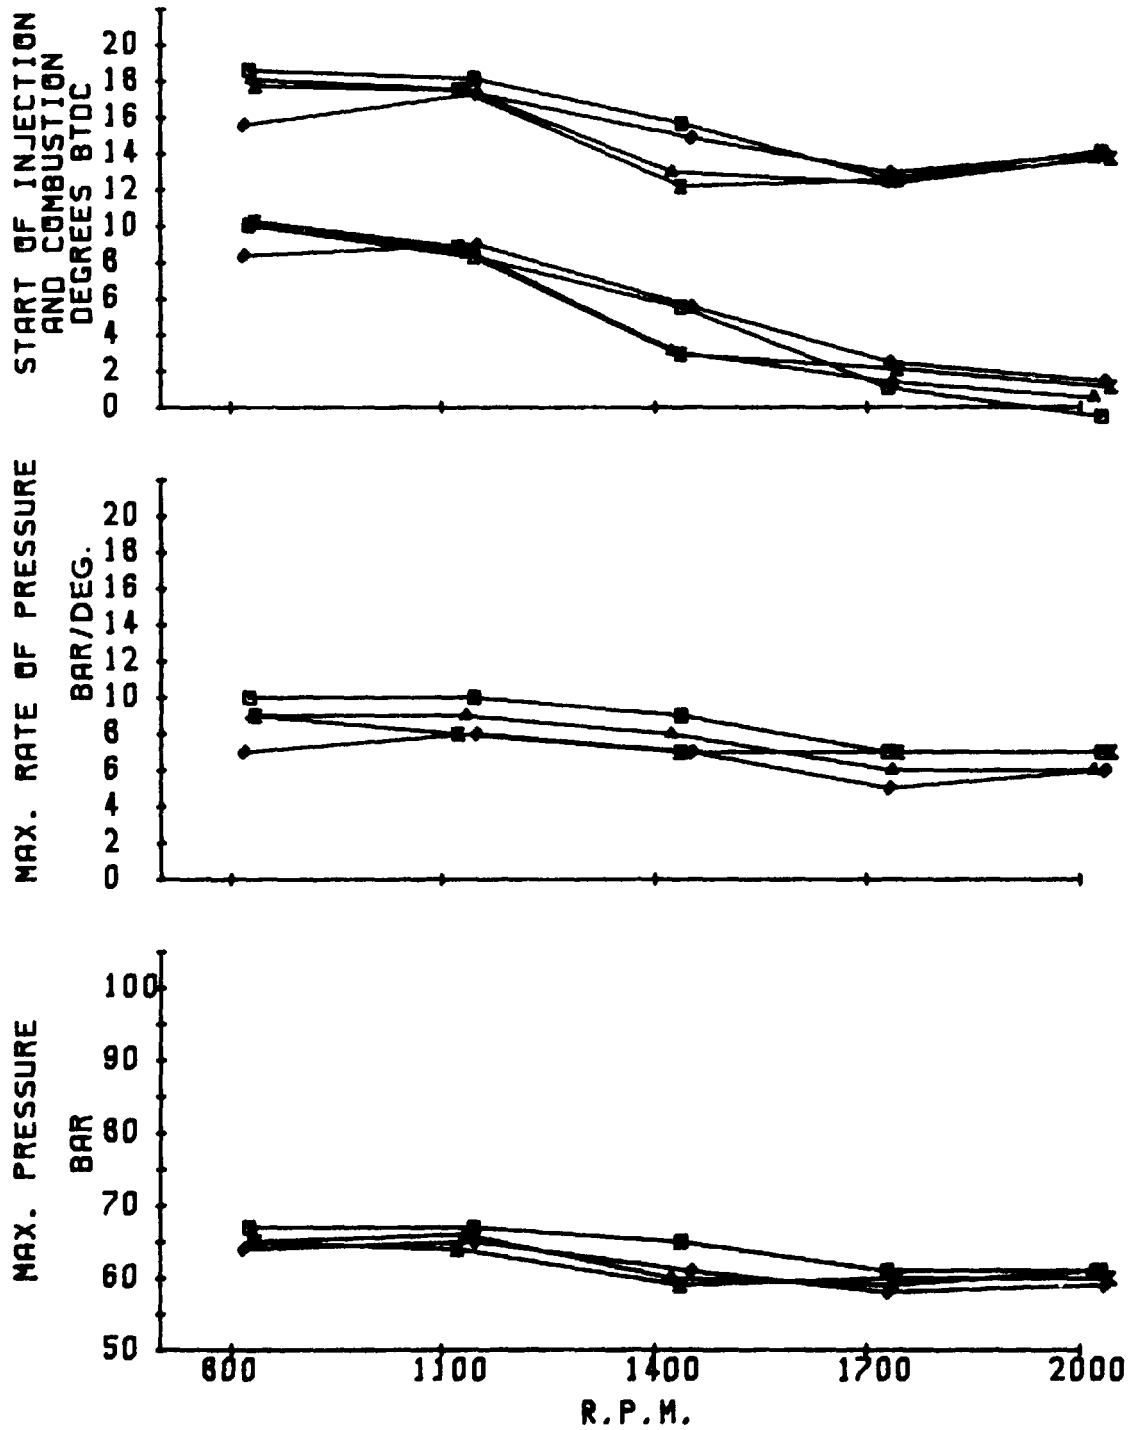


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/.210N × E20/.410N
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	1/3 LOAD
FIG AP30	

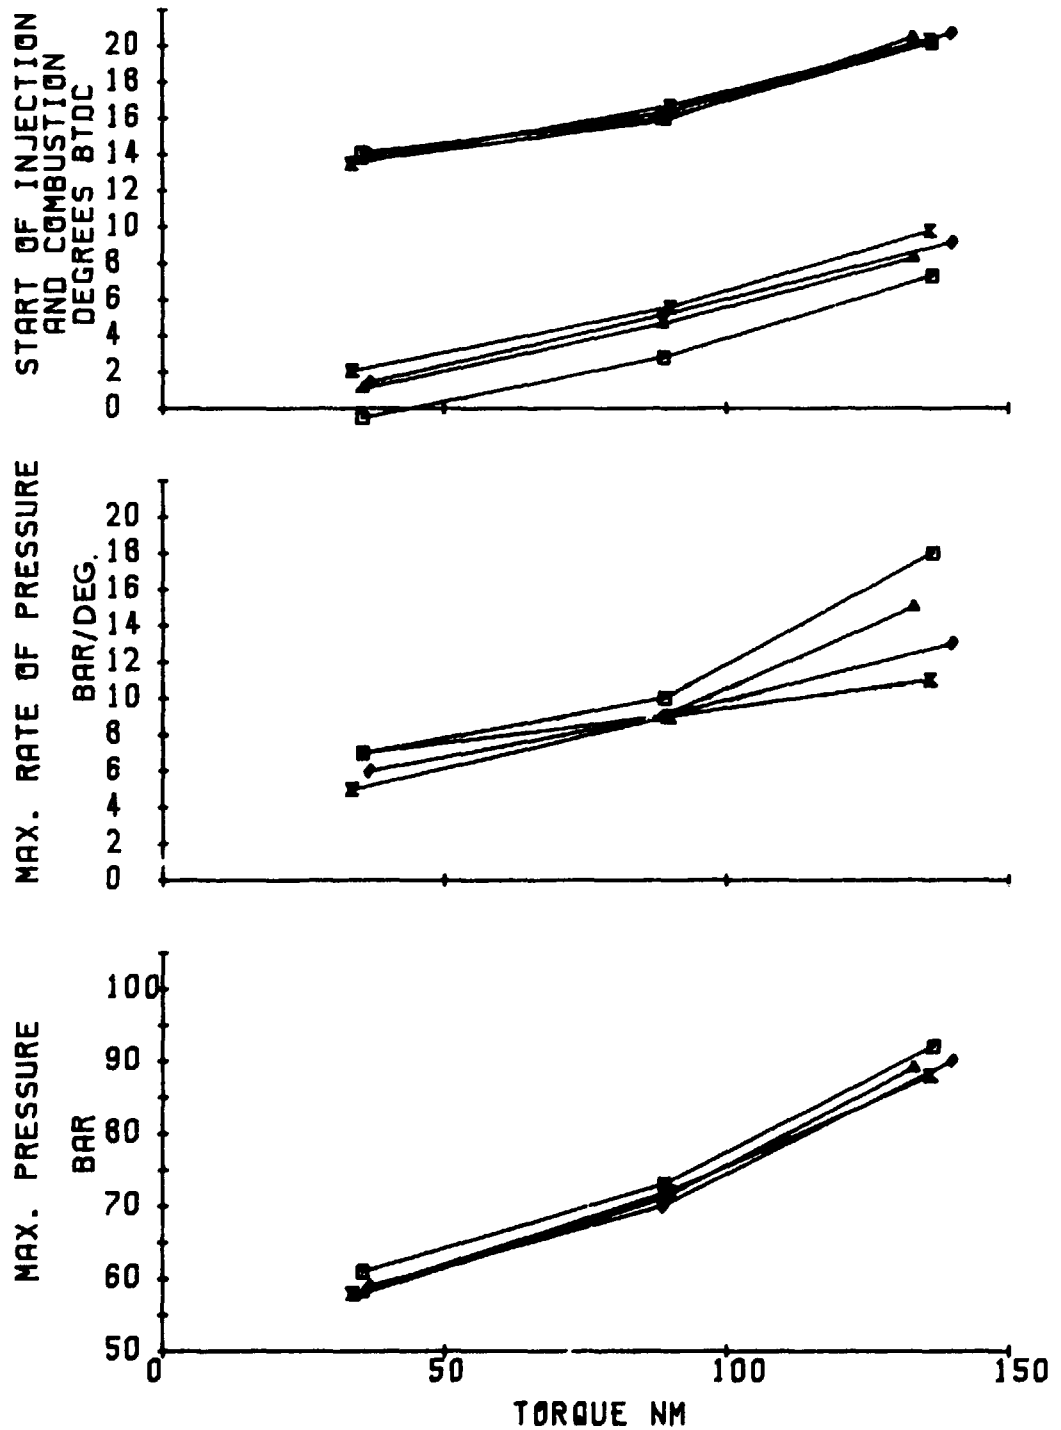




ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E20 ▲ E20/2.6TEGON ✕ E20/5.2TEGON 2000 R.P.M.
EFFECT OF TEGON ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP31	

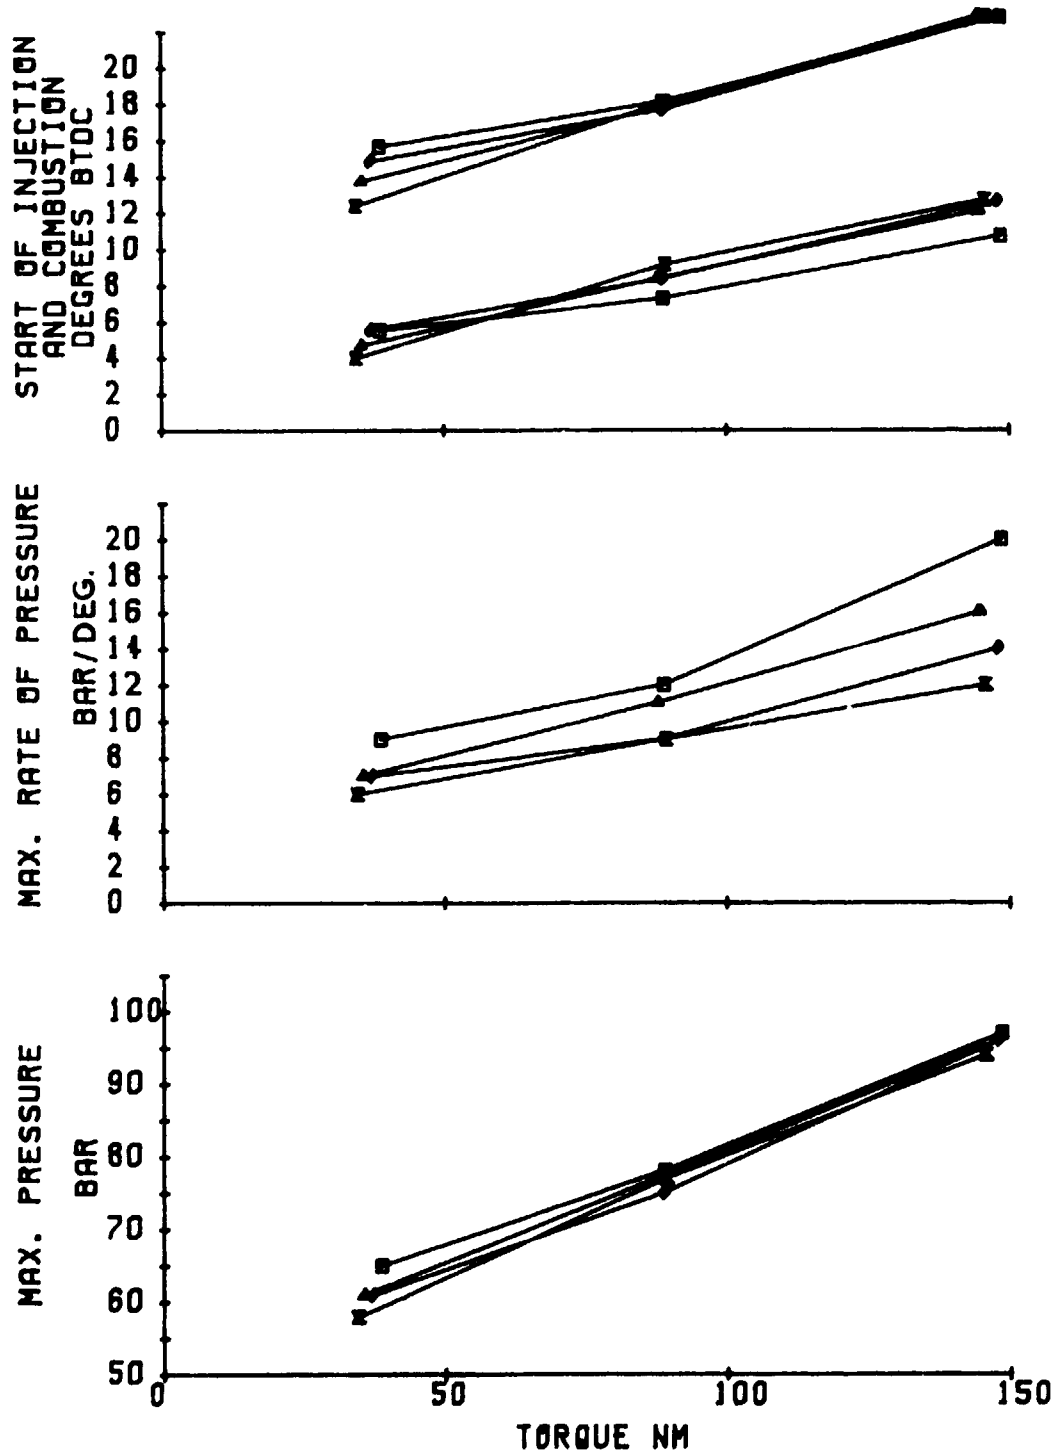


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊗ E20/5.2TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FIG AP32

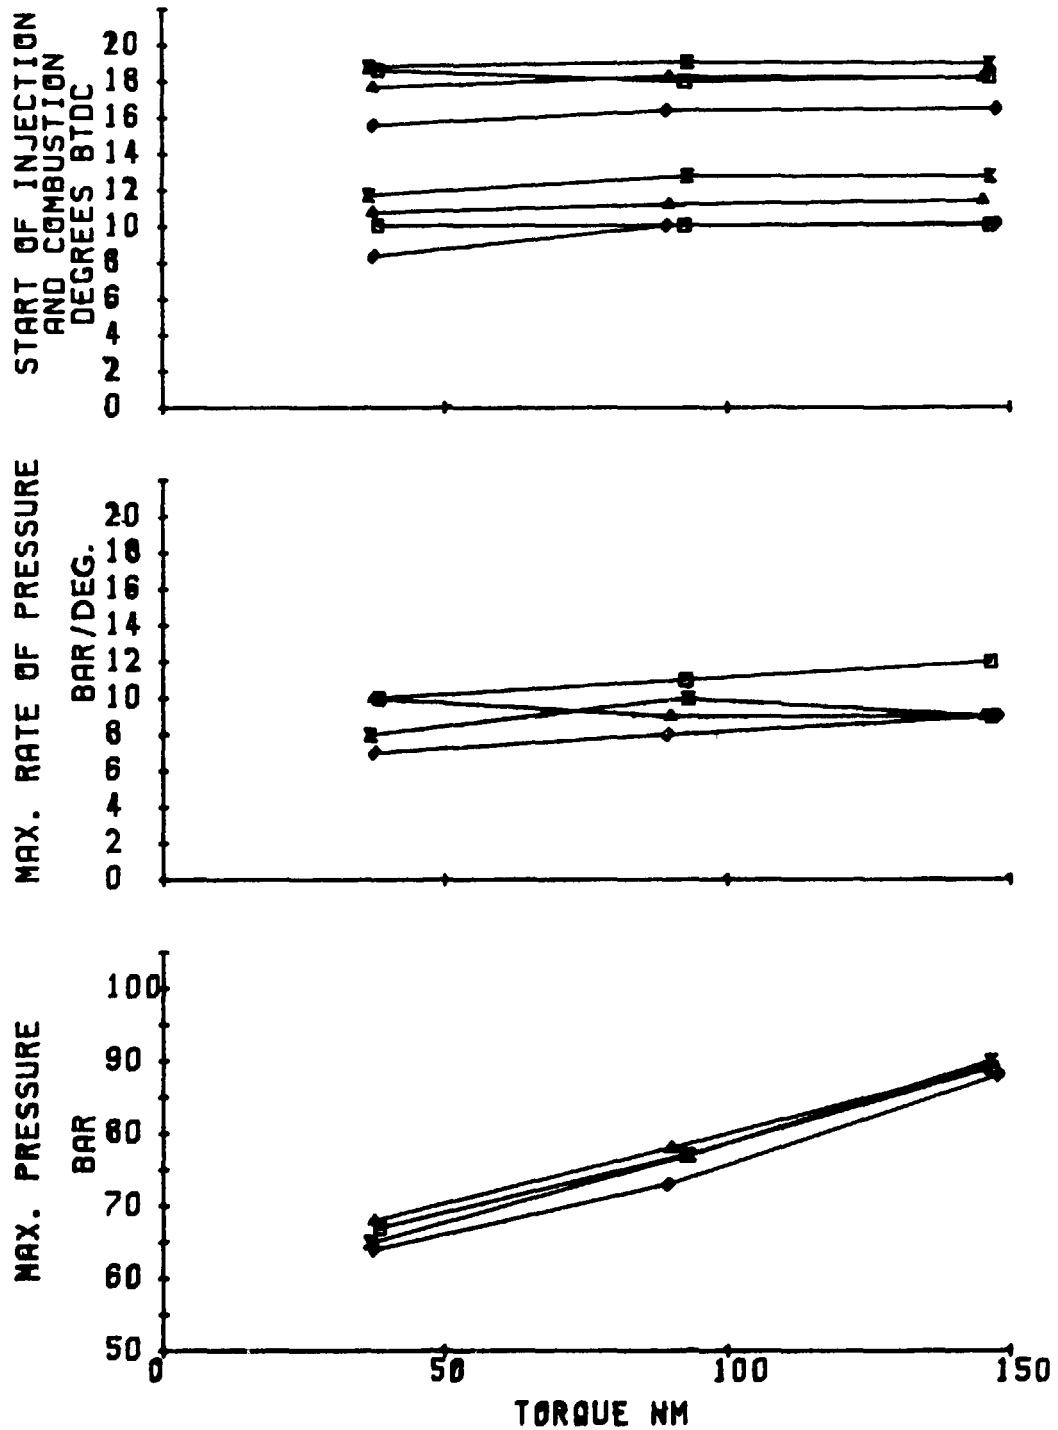


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN × E20/5.2TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP33	

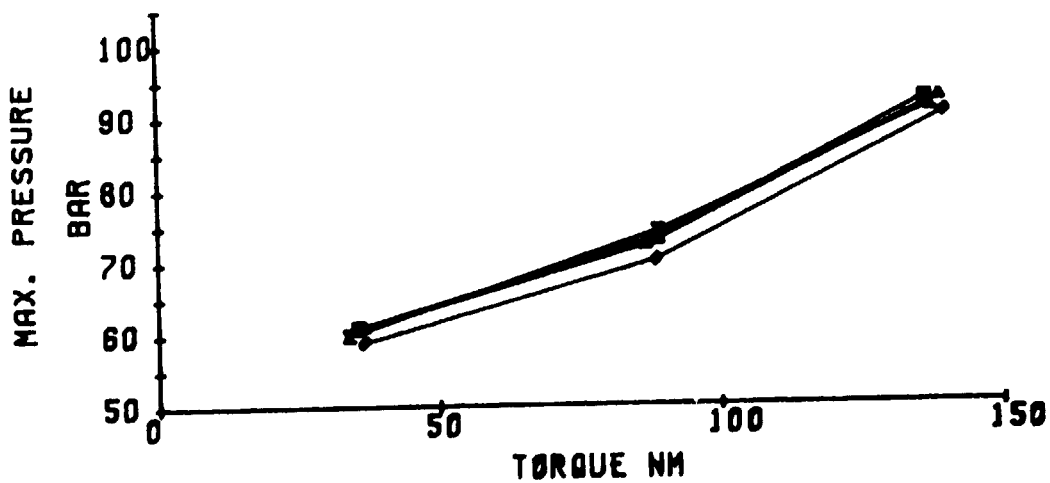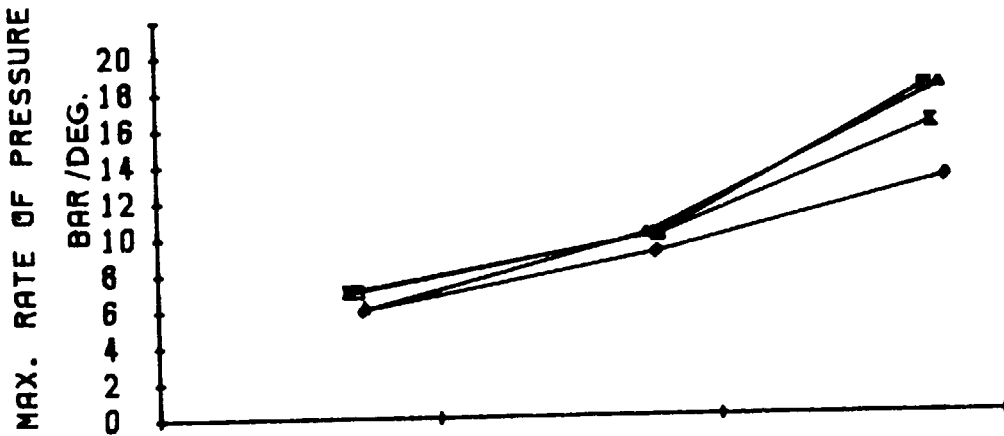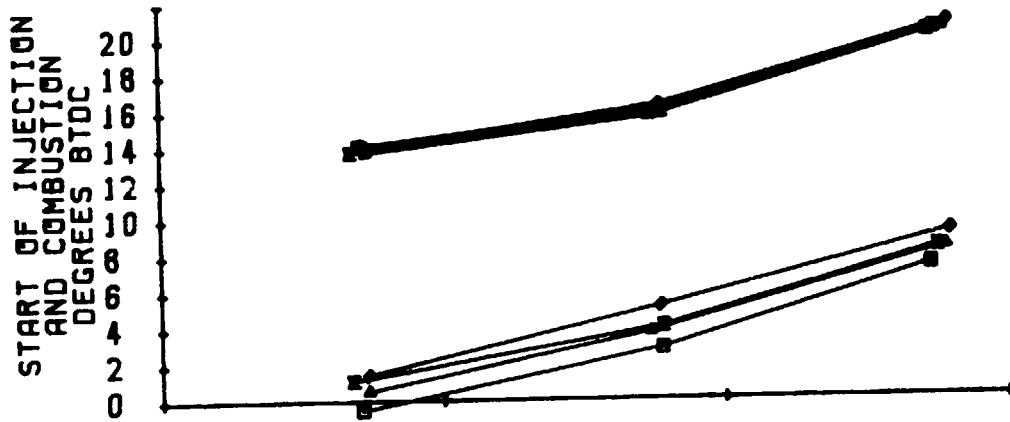


ENGINE : FORD 3000 CAPACITY: 2800	◆ DIST 100 ■ E20 ▲ E20/.210N × E20/.410N 2000 R.P.M.
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FIG AP34

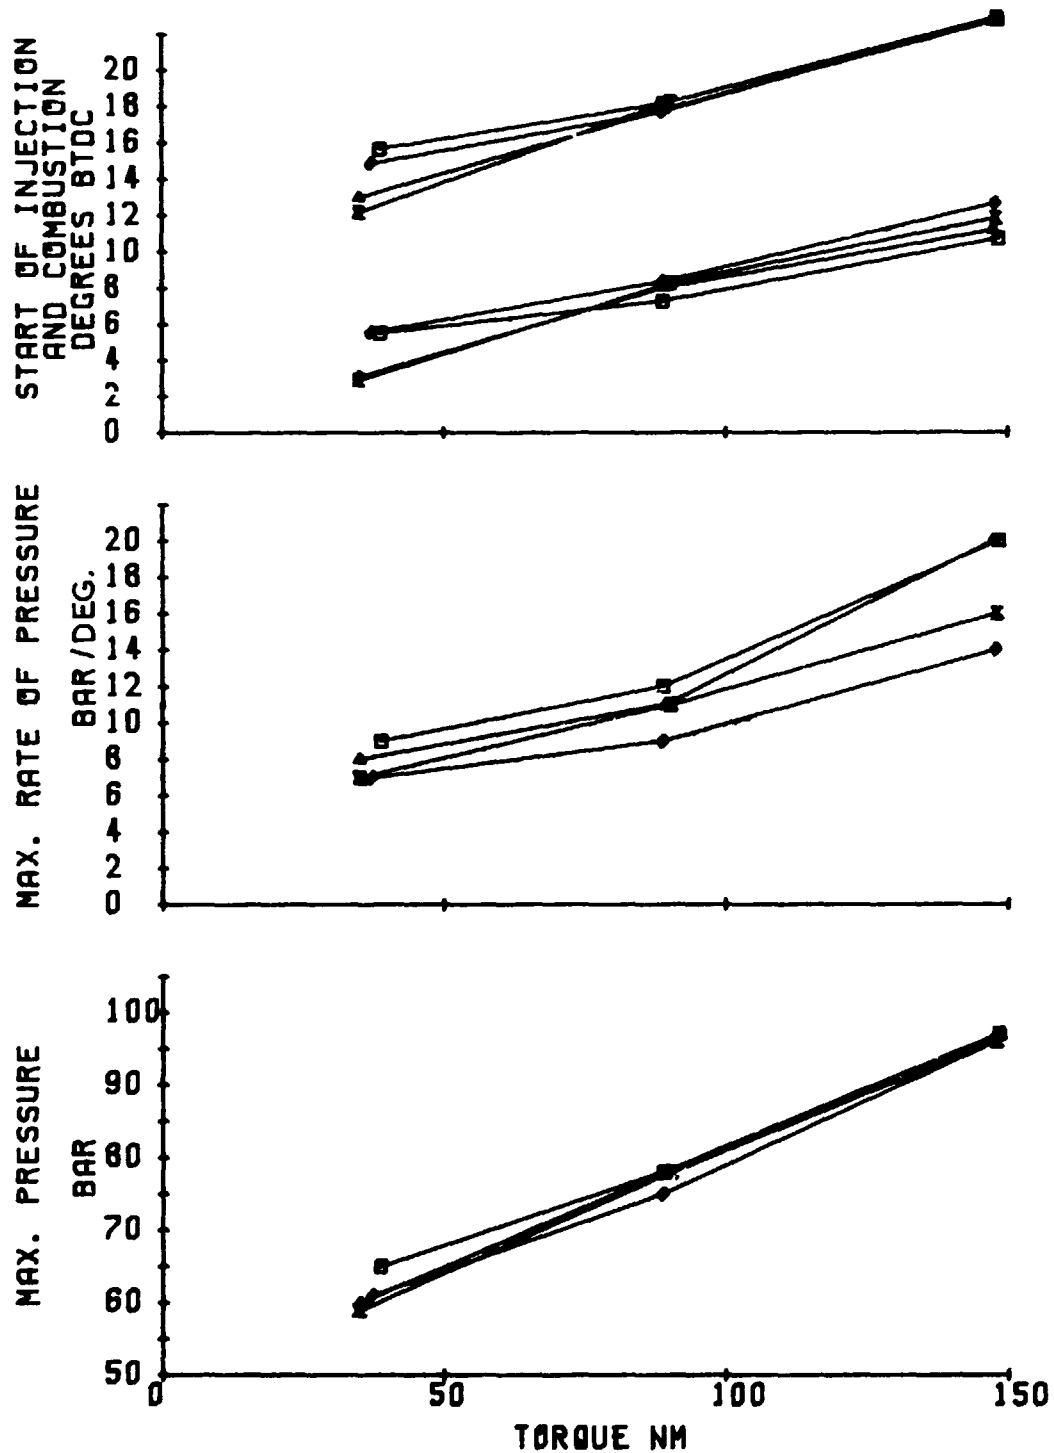


ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E20 ▲ E20/.210N × E20/.410N 1400 R.P.M.
EFFECT OF 10N ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FIG AP35

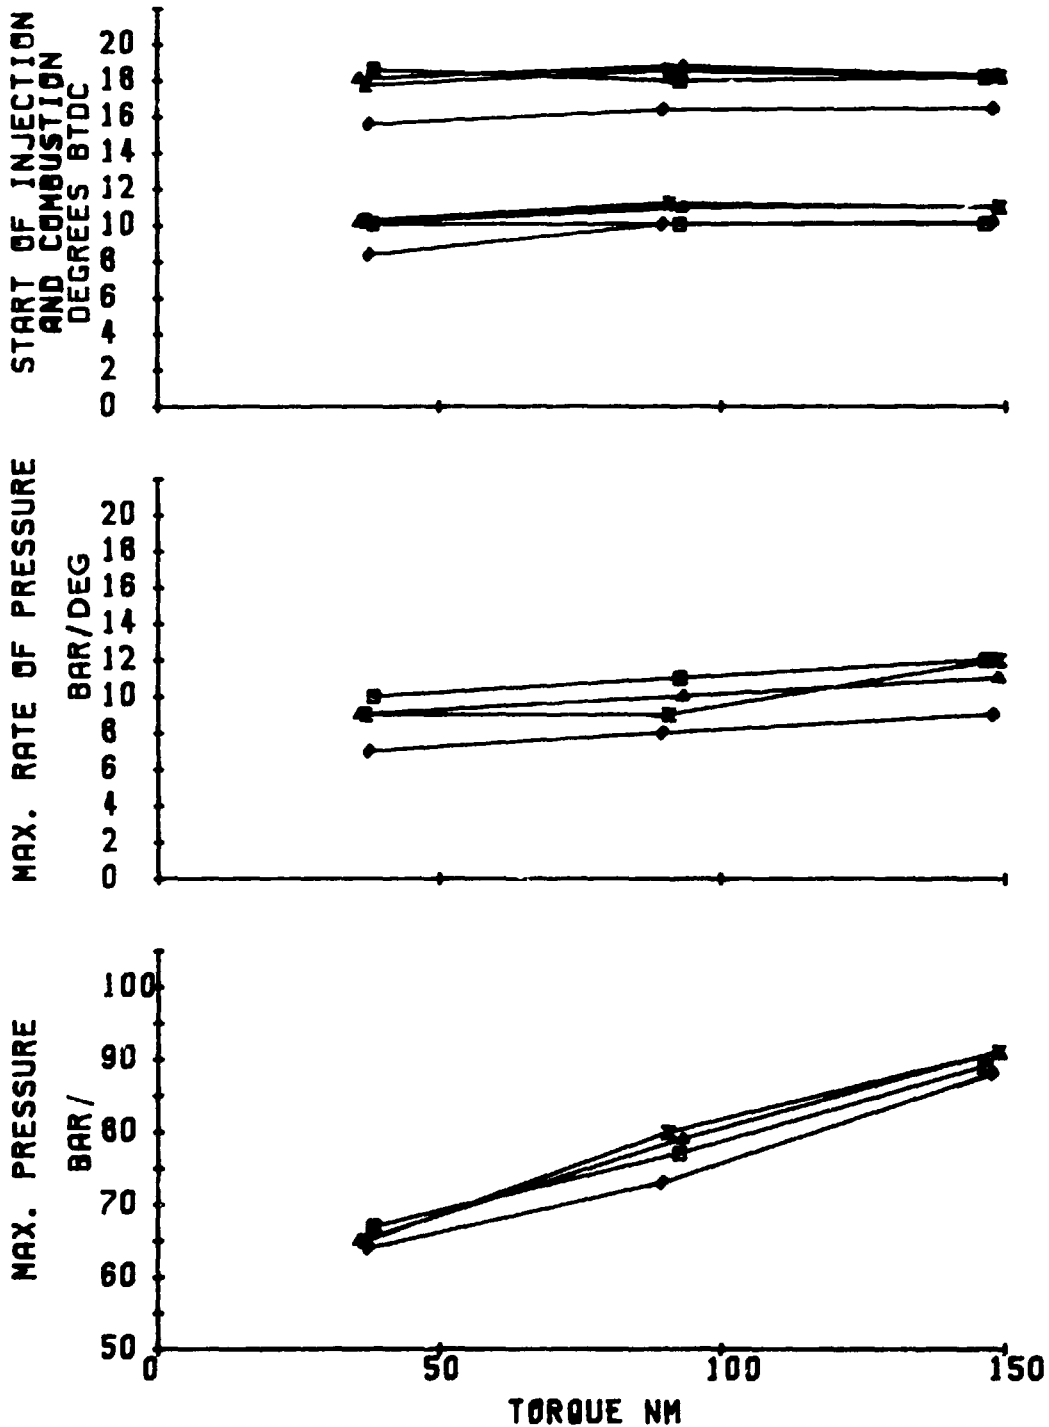


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> • DIST 100 ■ E20 ▲ E20/.210N * E20/.410N
EFFECT OF 10N ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
800 R.P.M.	
FIG AP36	

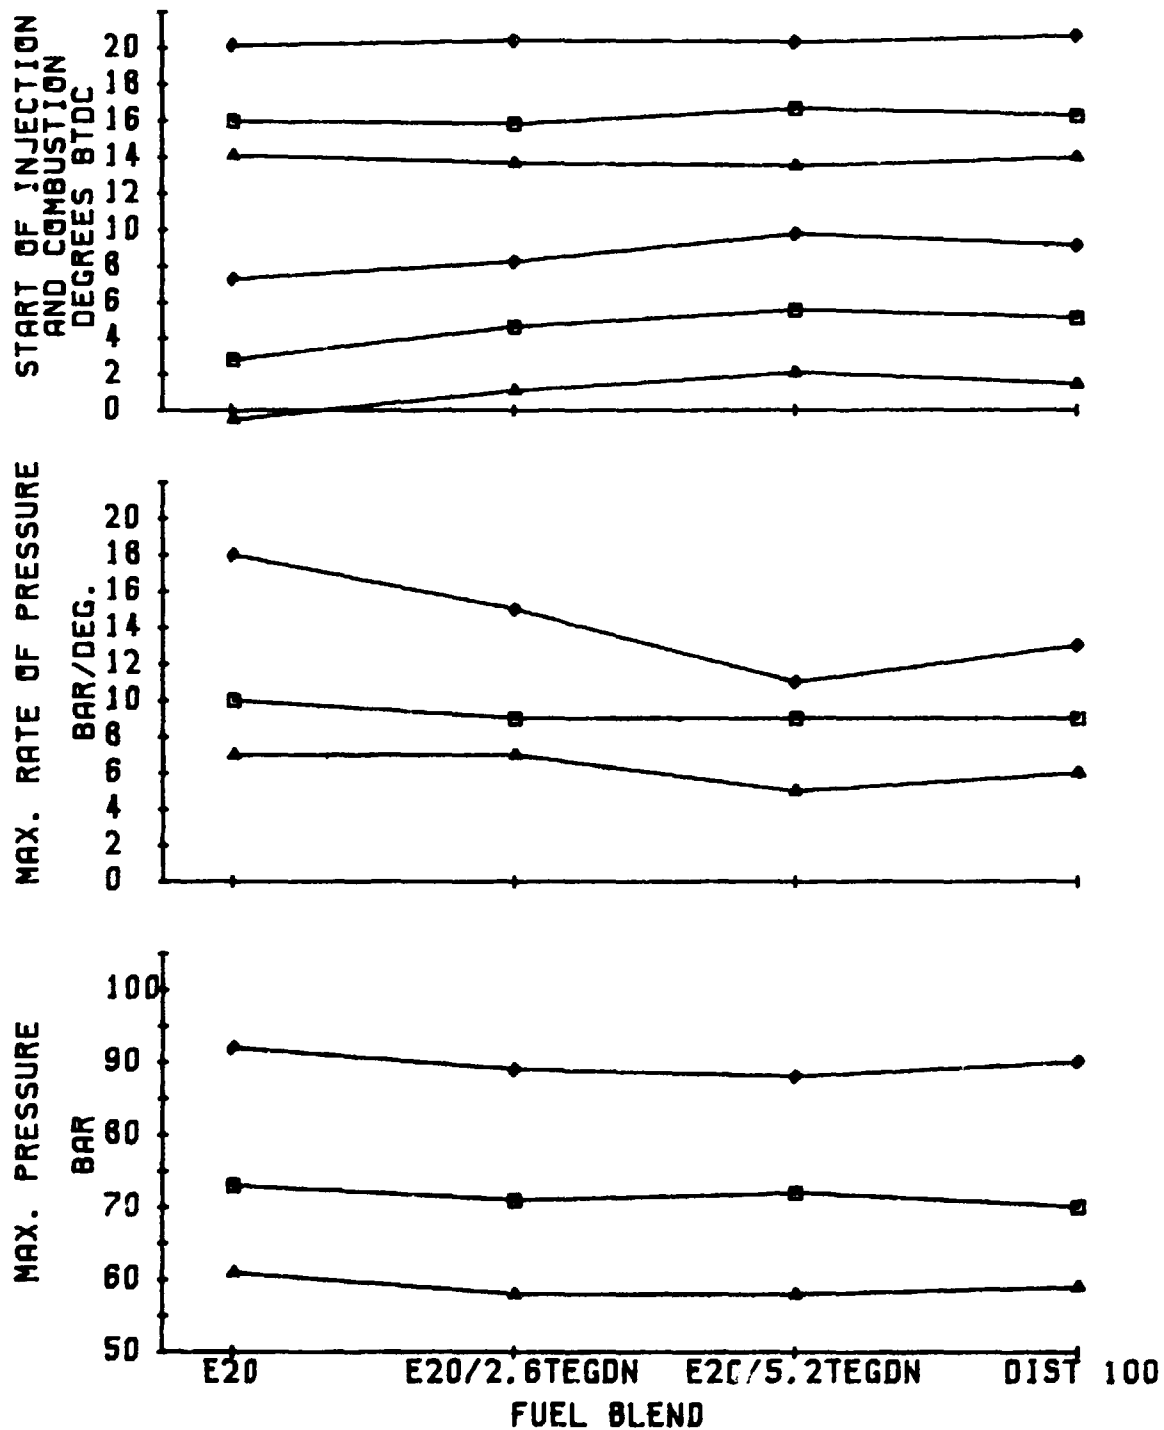


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ● FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	2000 R.P.M. FIG AP37

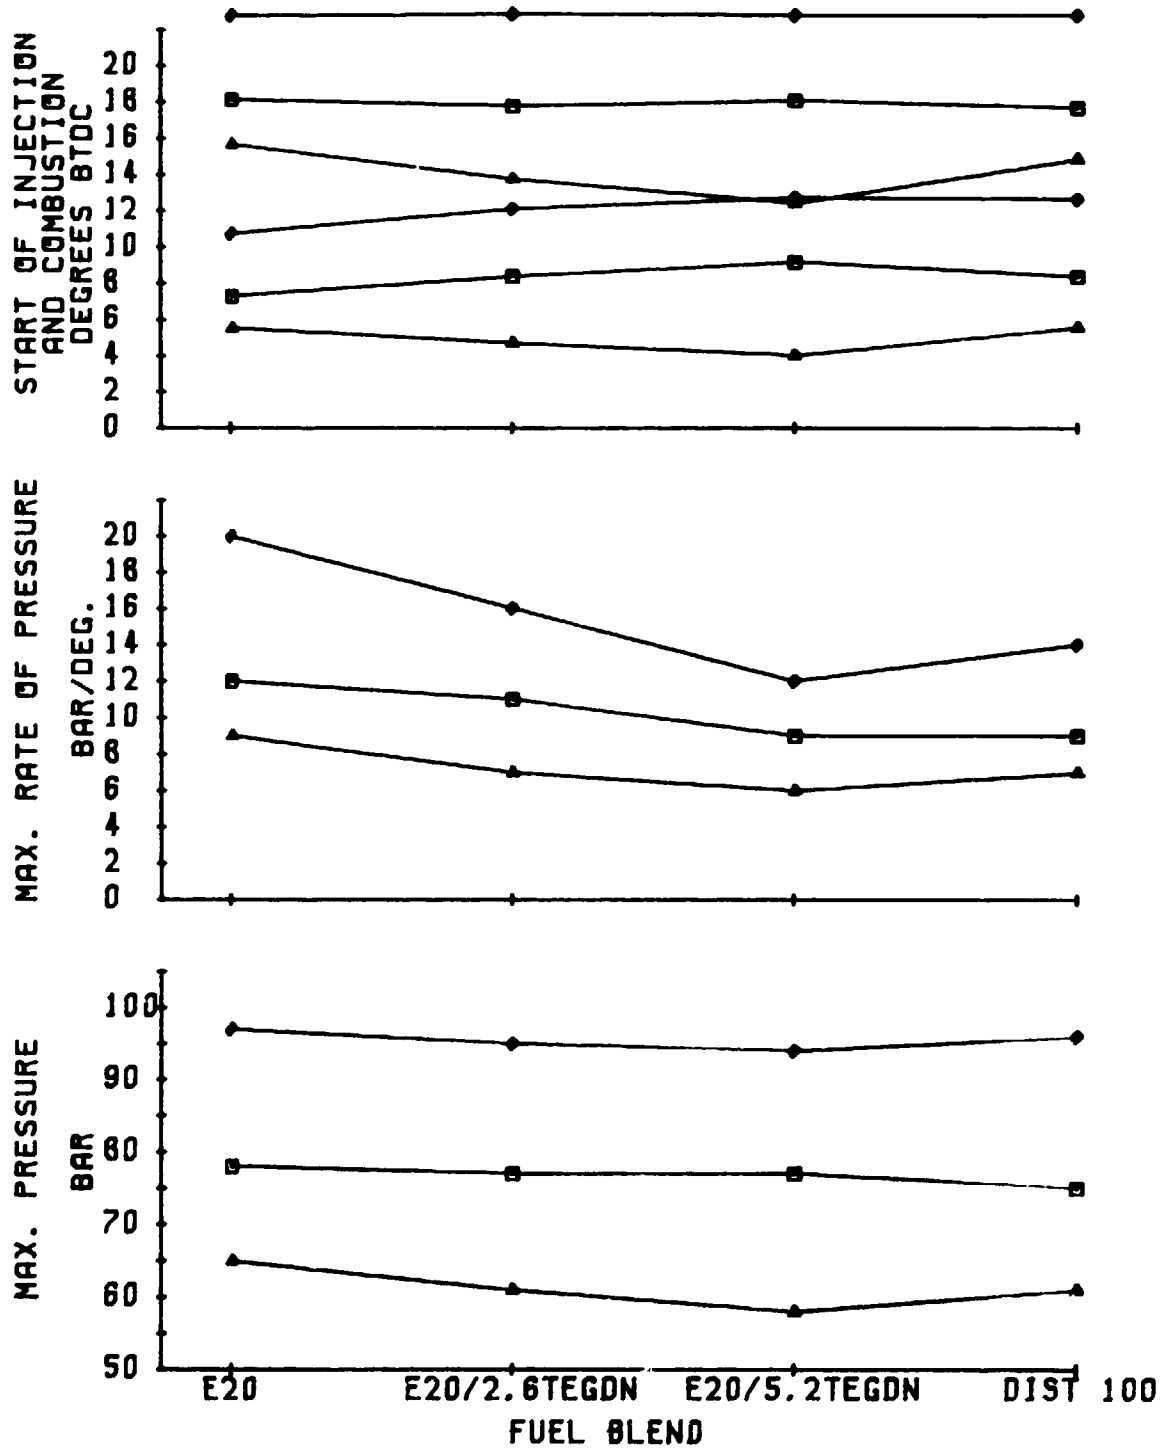


ENGINE : FORD 3000 CAPACITY: 2860	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	1400 R.P.M.
	FIG AP38

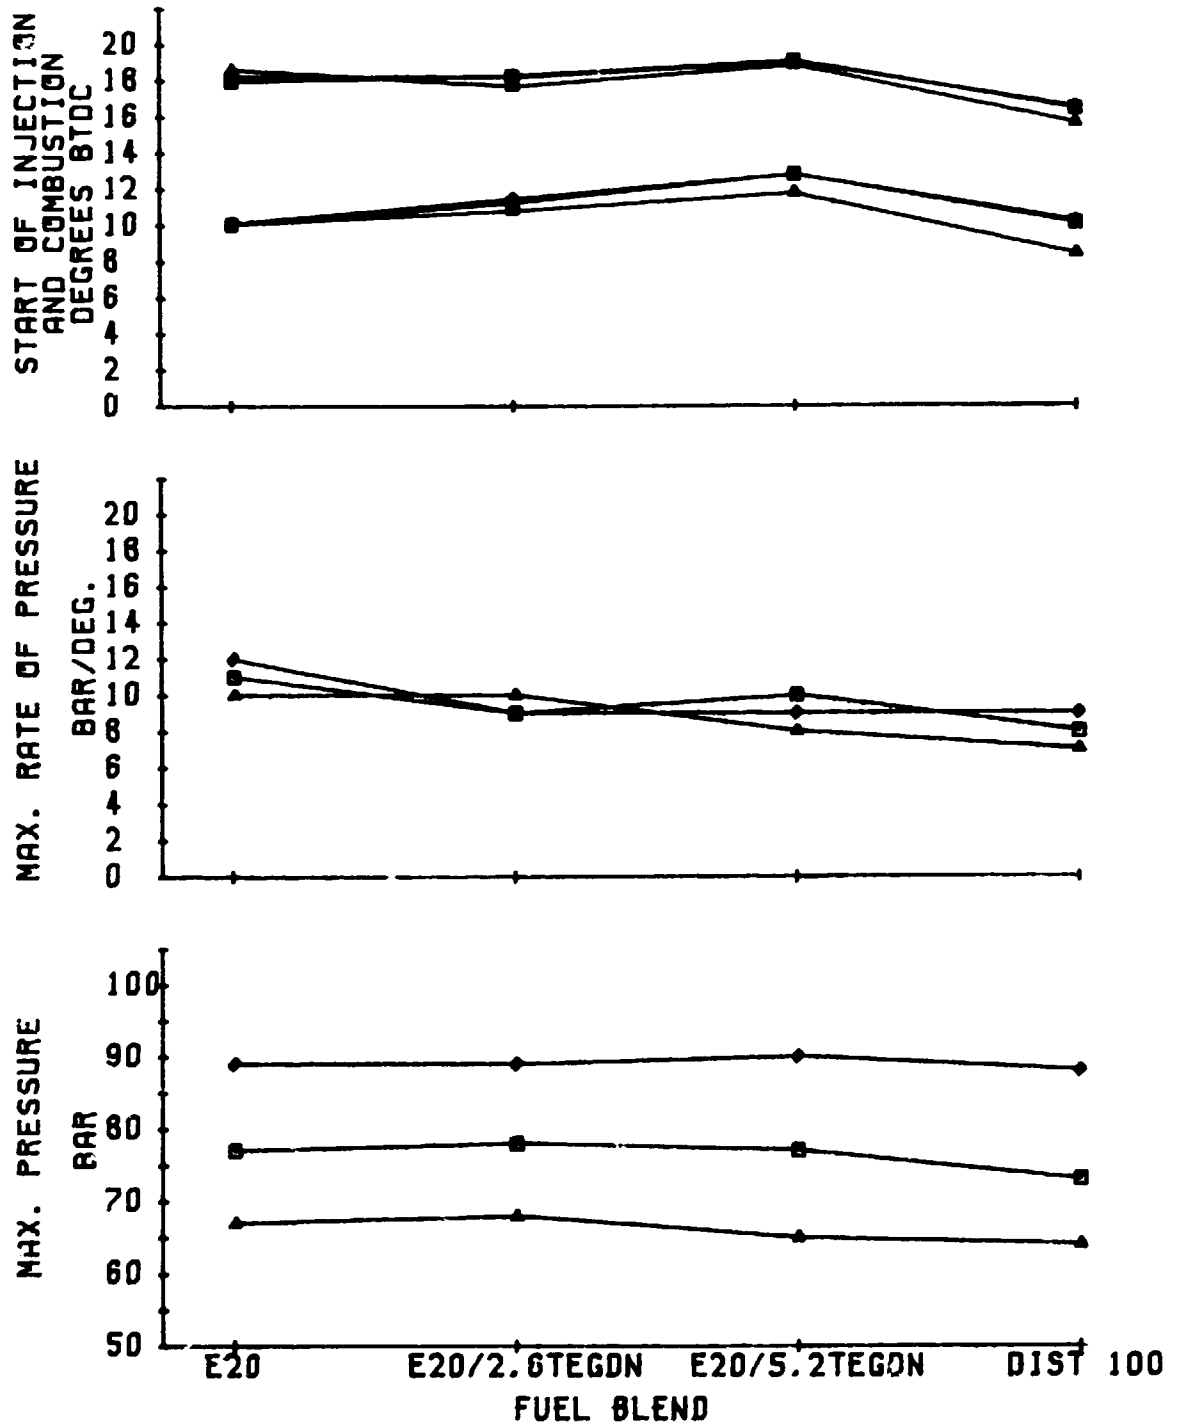


ENGINE : FORD 3000 CAPACITY: 2660	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	800 R.P.M. FIG AP39

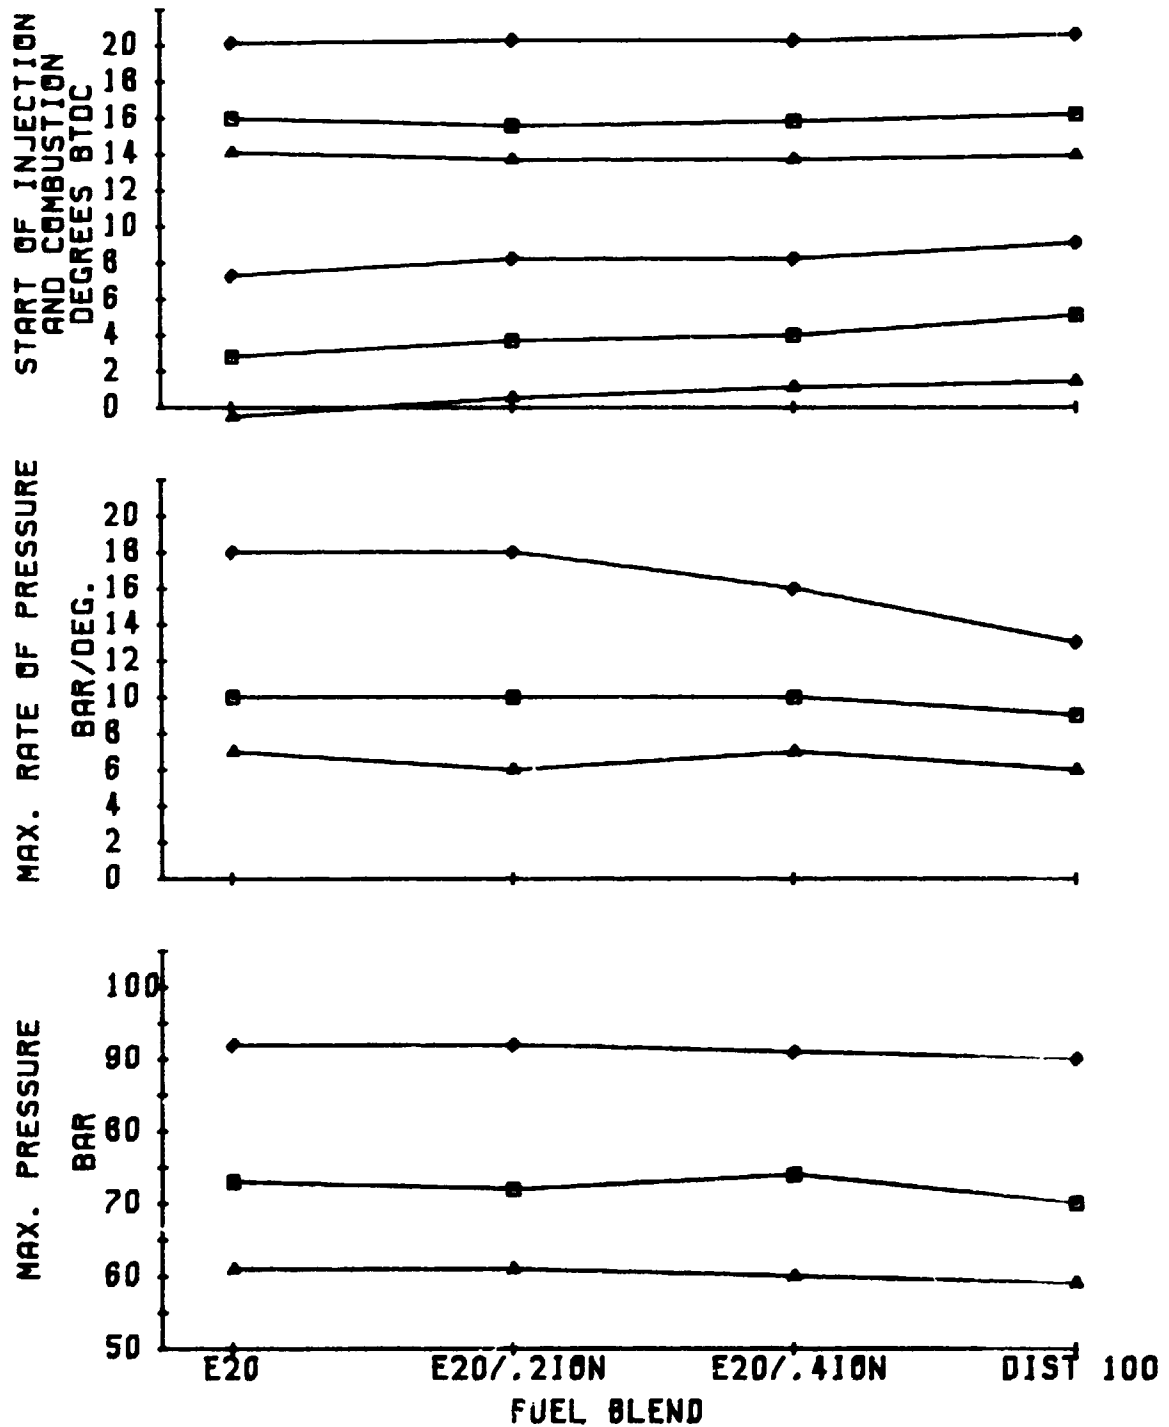


ENGINE : FORD 3000 CAPACITY: 2660	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	2000 R.P.M. FIG AP40

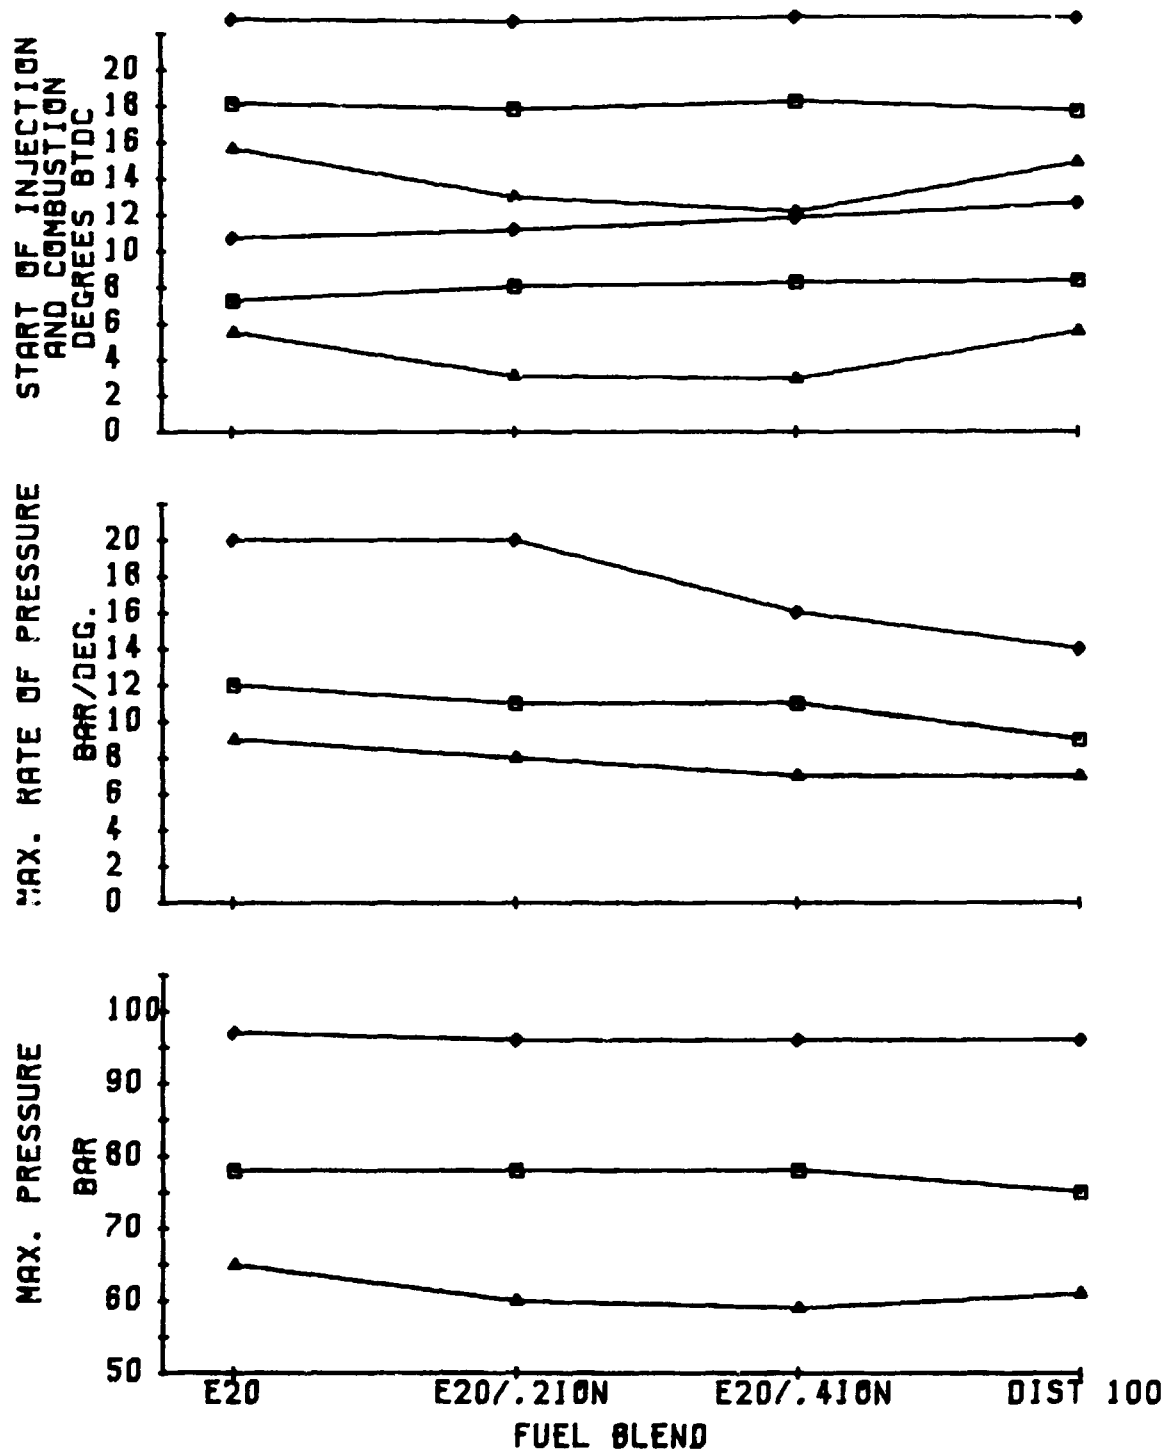


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	1400 R.P.M. FIG AP41

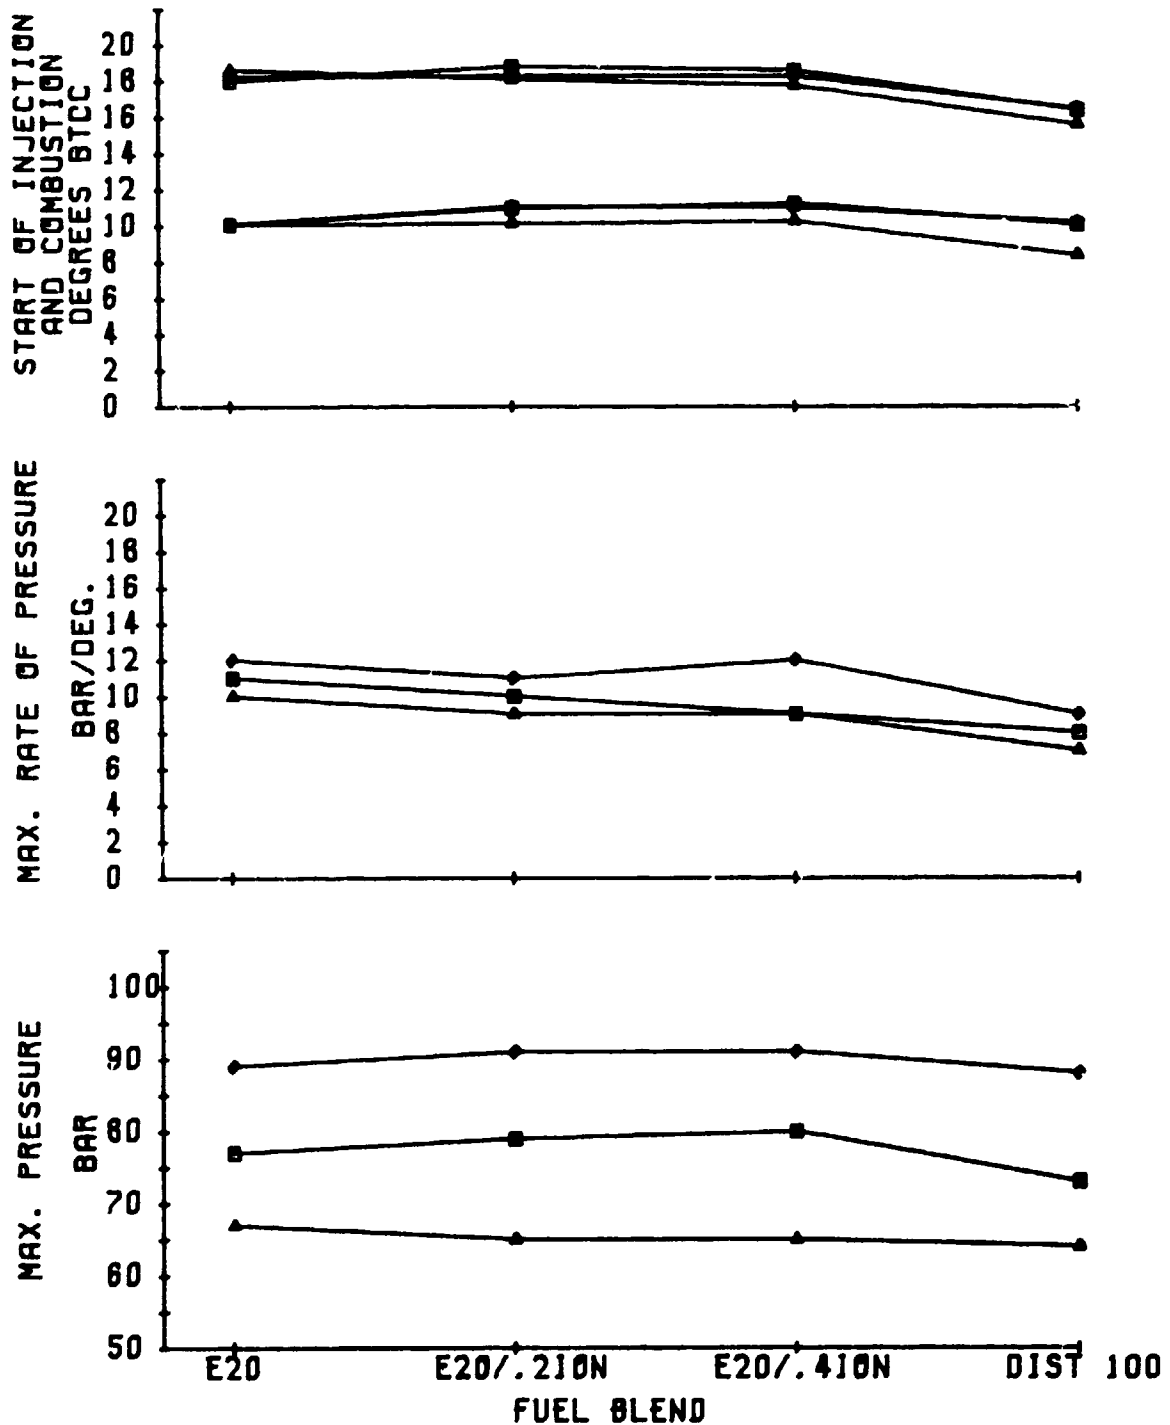


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF ION ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	800 R.P.M.
	FIG AP42

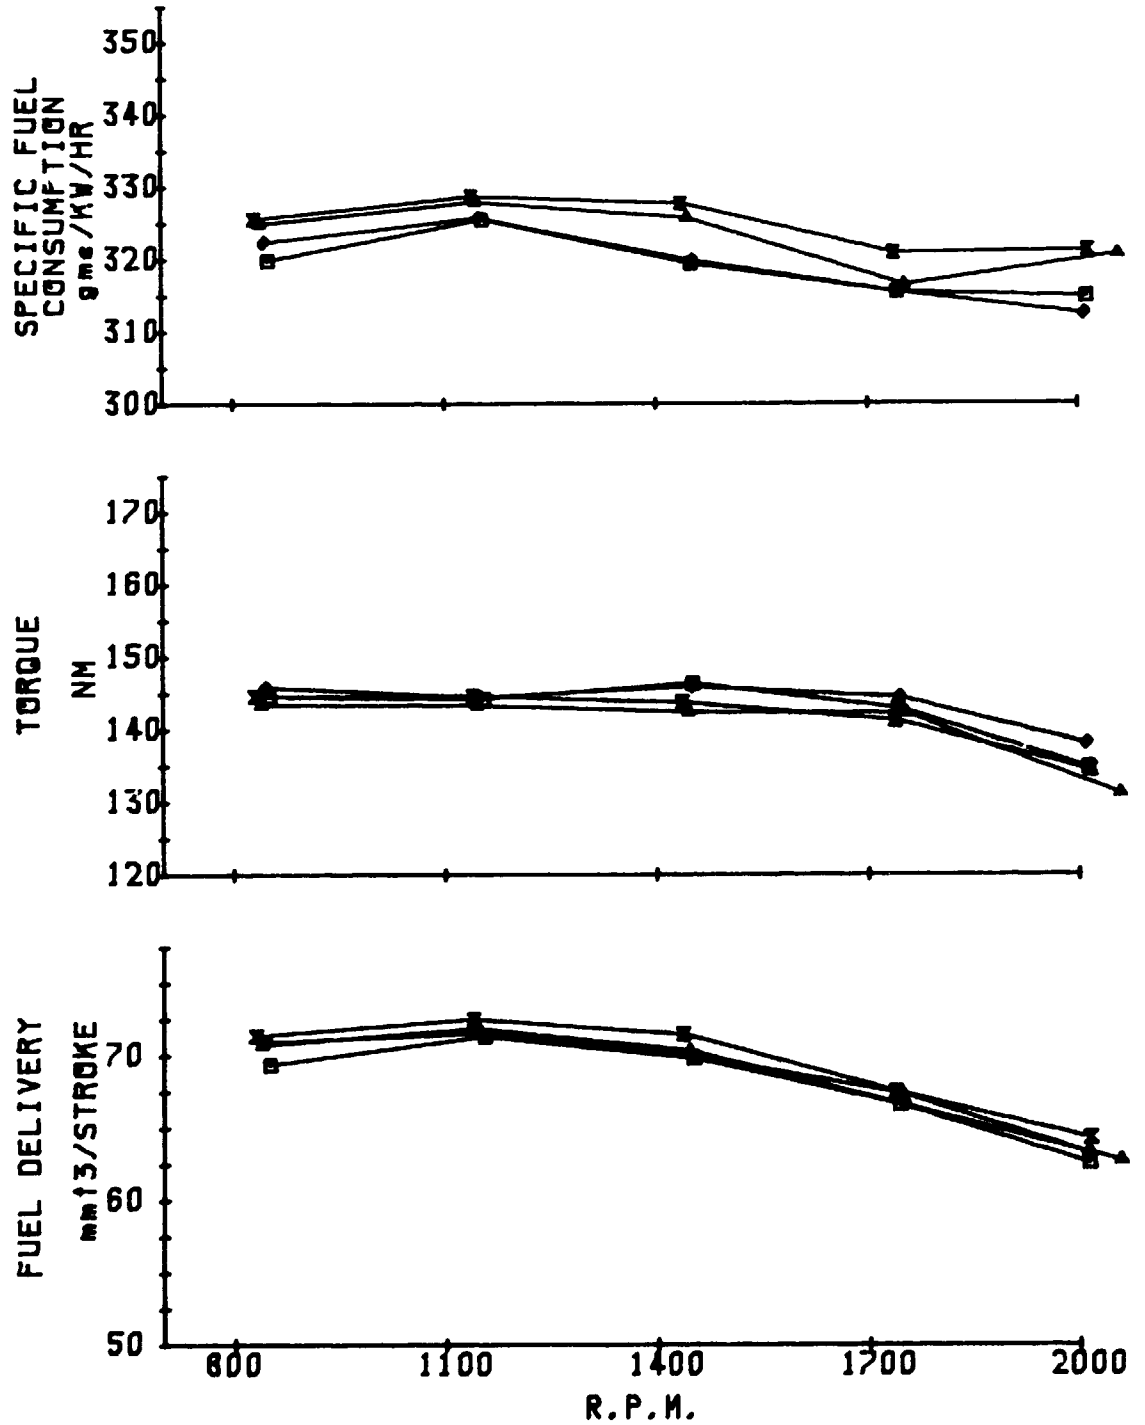


ENGINE : FORD 3000 CAPACITY: 2863	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊠ E20/5.2TEGDN
EFFECT OF TEGDN ON INJECTION PUMP DELIVERY, TORQUE & S.F.C.	
FIG AP43	

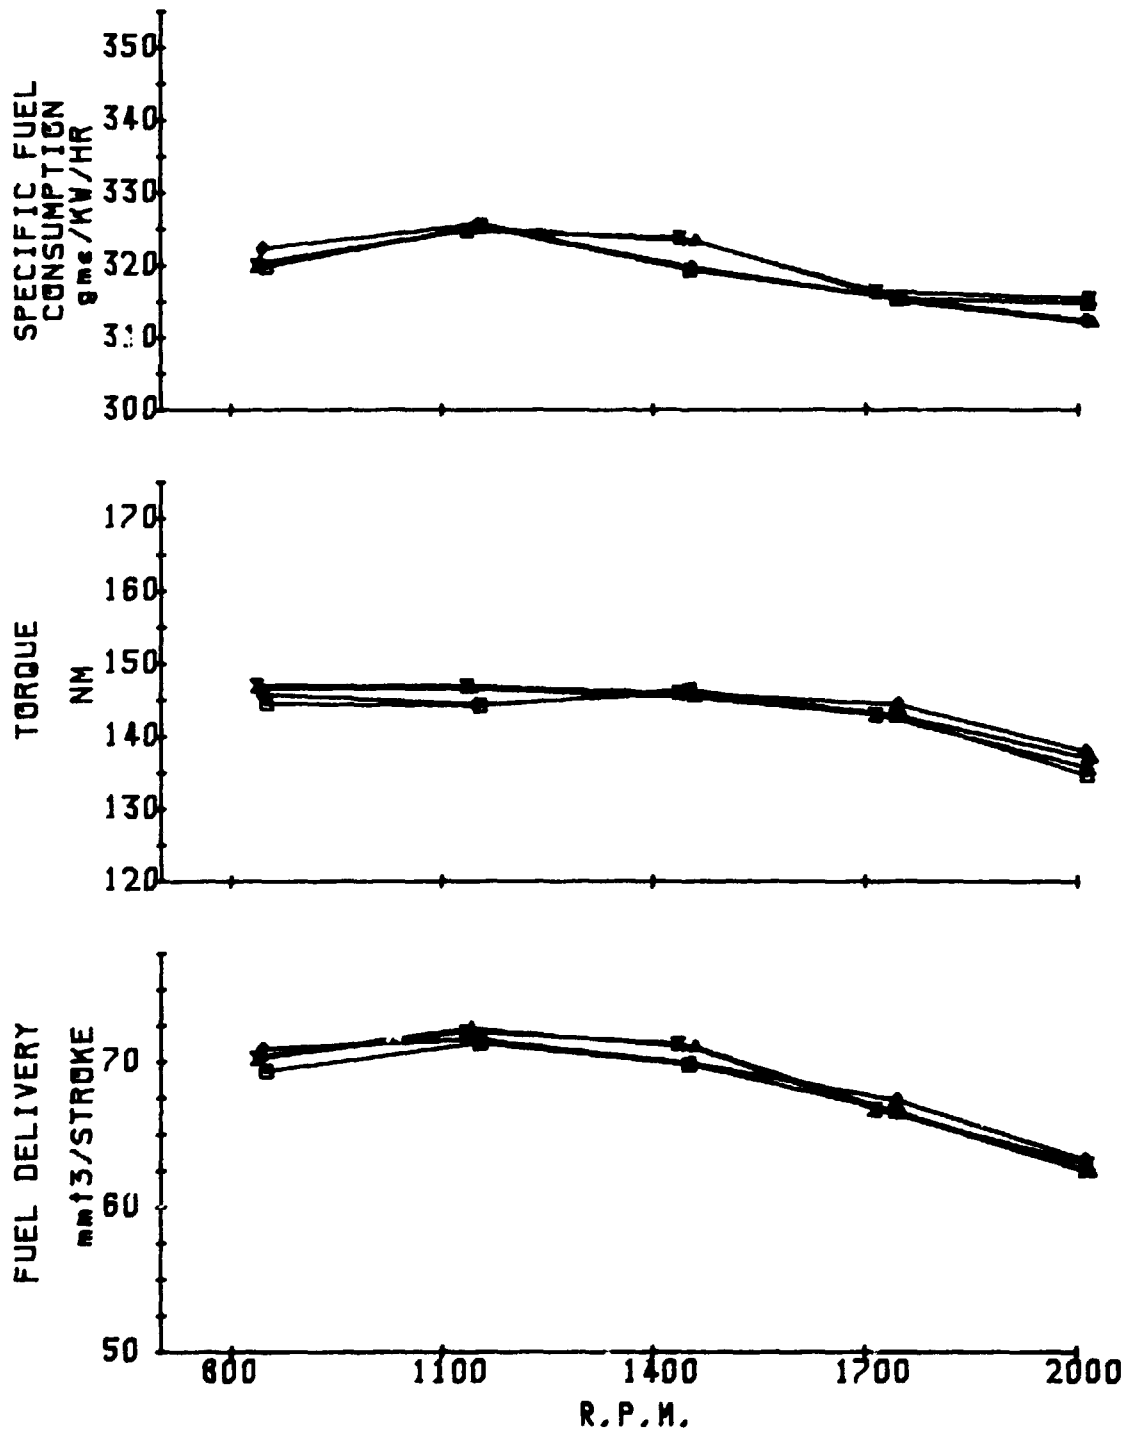


ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E20 ▲ E20/.2ION × E20/.4ION
EFFECT OF ION ON INJECTION PUMP DELIVERY, TORQUE & S.F.C.	FULL LOAD
	FIG AP44

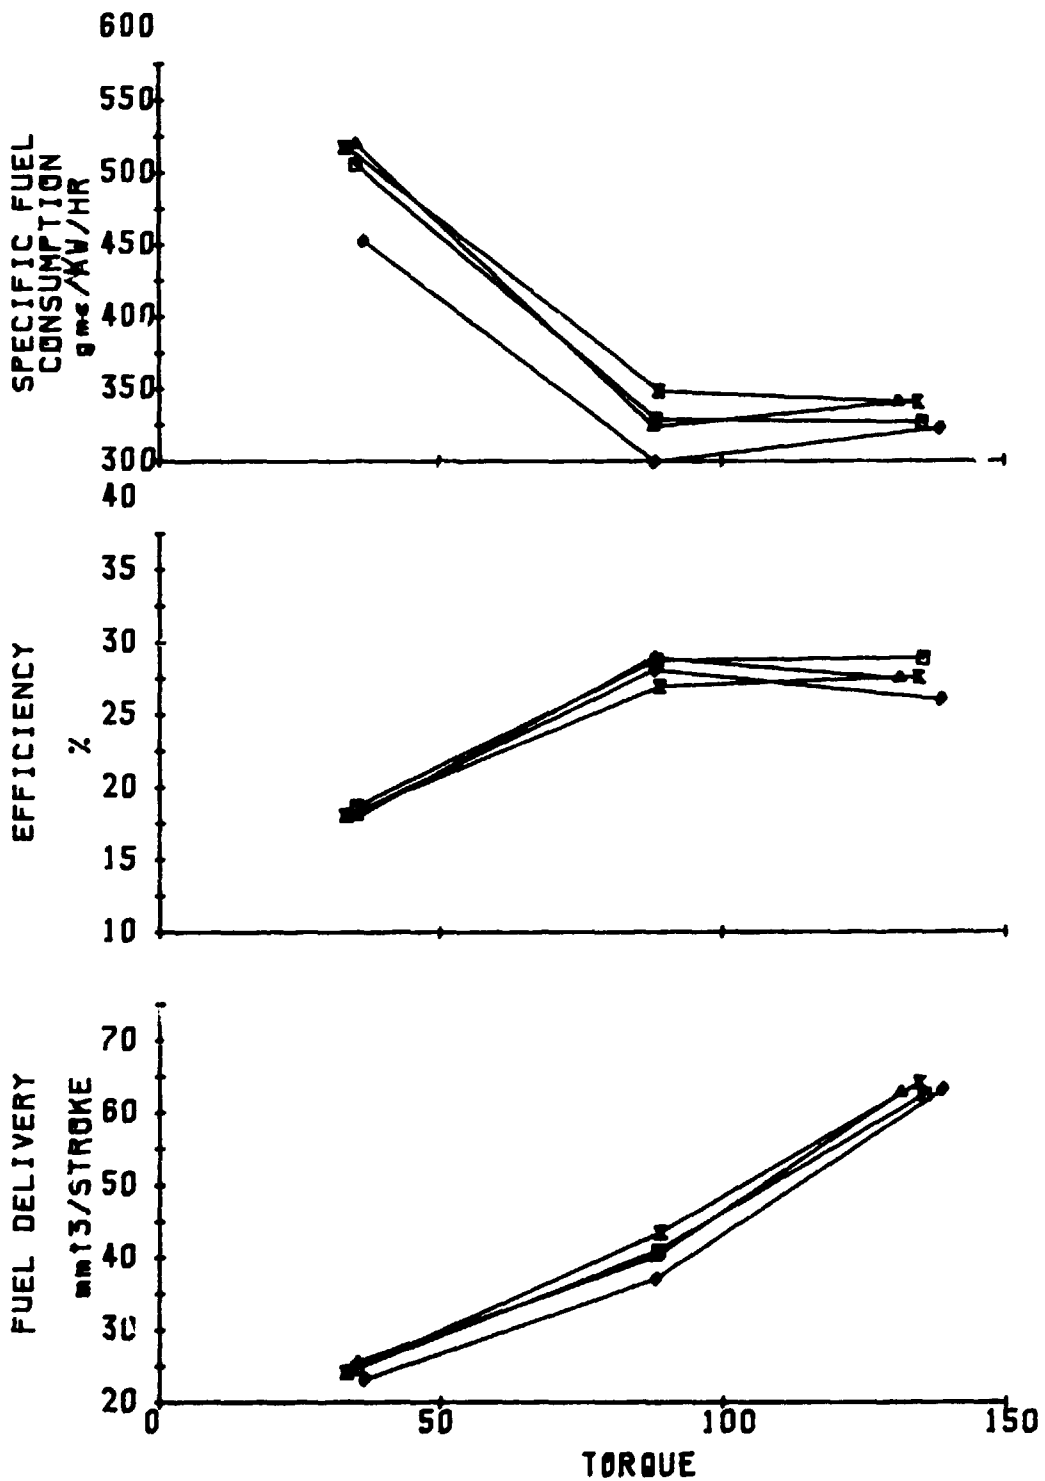


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN ✕ E20/5.2TEGDN
EFFECT OF TEGDN ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP45	

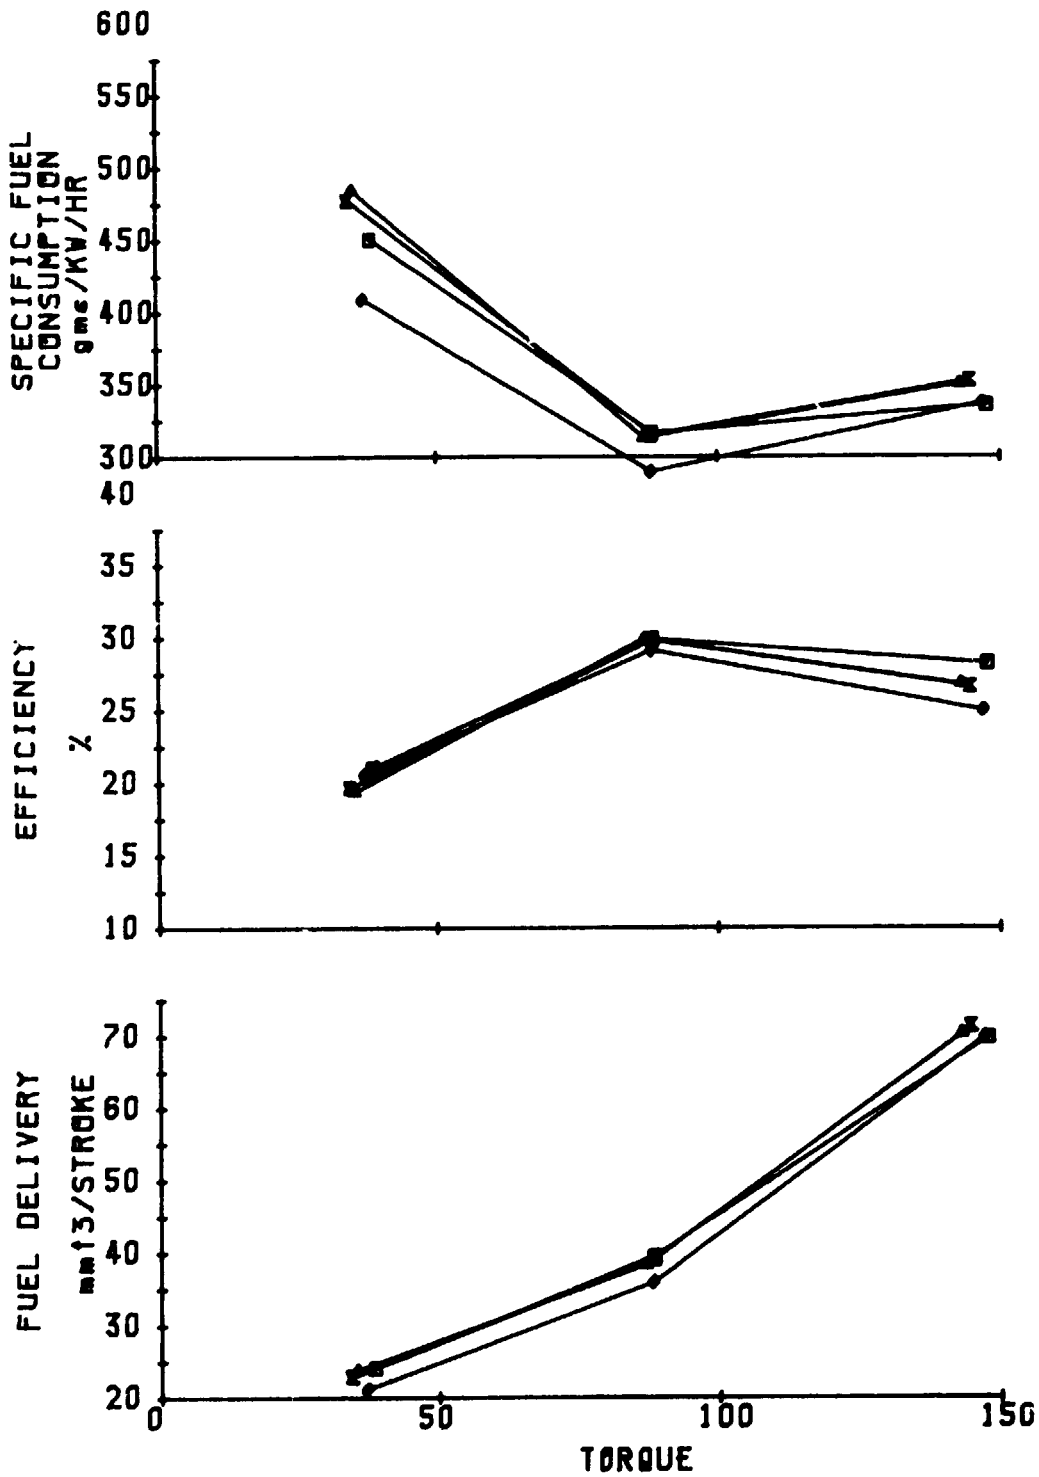


ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E20 ▲ E20/2.6TEGDN × E20/5.2TEGDN 1400 R.P.M.
EFFECT OF TEGDN ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP46	

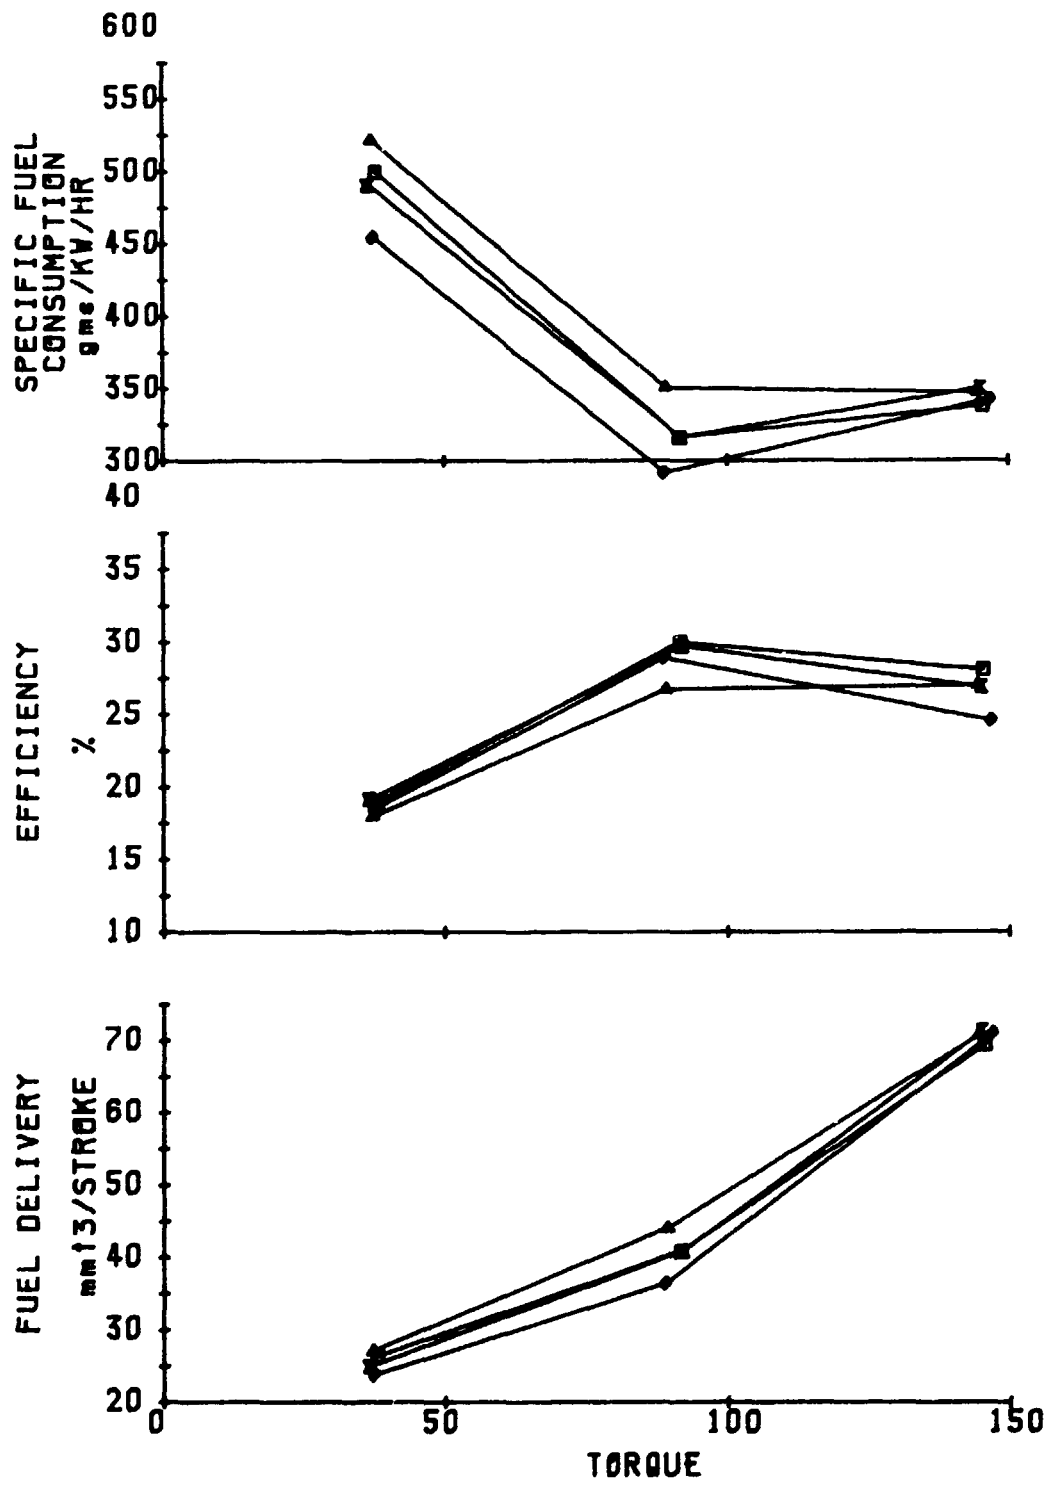


ENGINE : FORD 3000 CAPACITY: 2880	<ul style="list-style-type: none"> • DIST 100 ■ E20 ▲ E20/2.6TEGDN ⊗ E20/5.2TEGDN
EFFECT OF TEGDN ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP47	

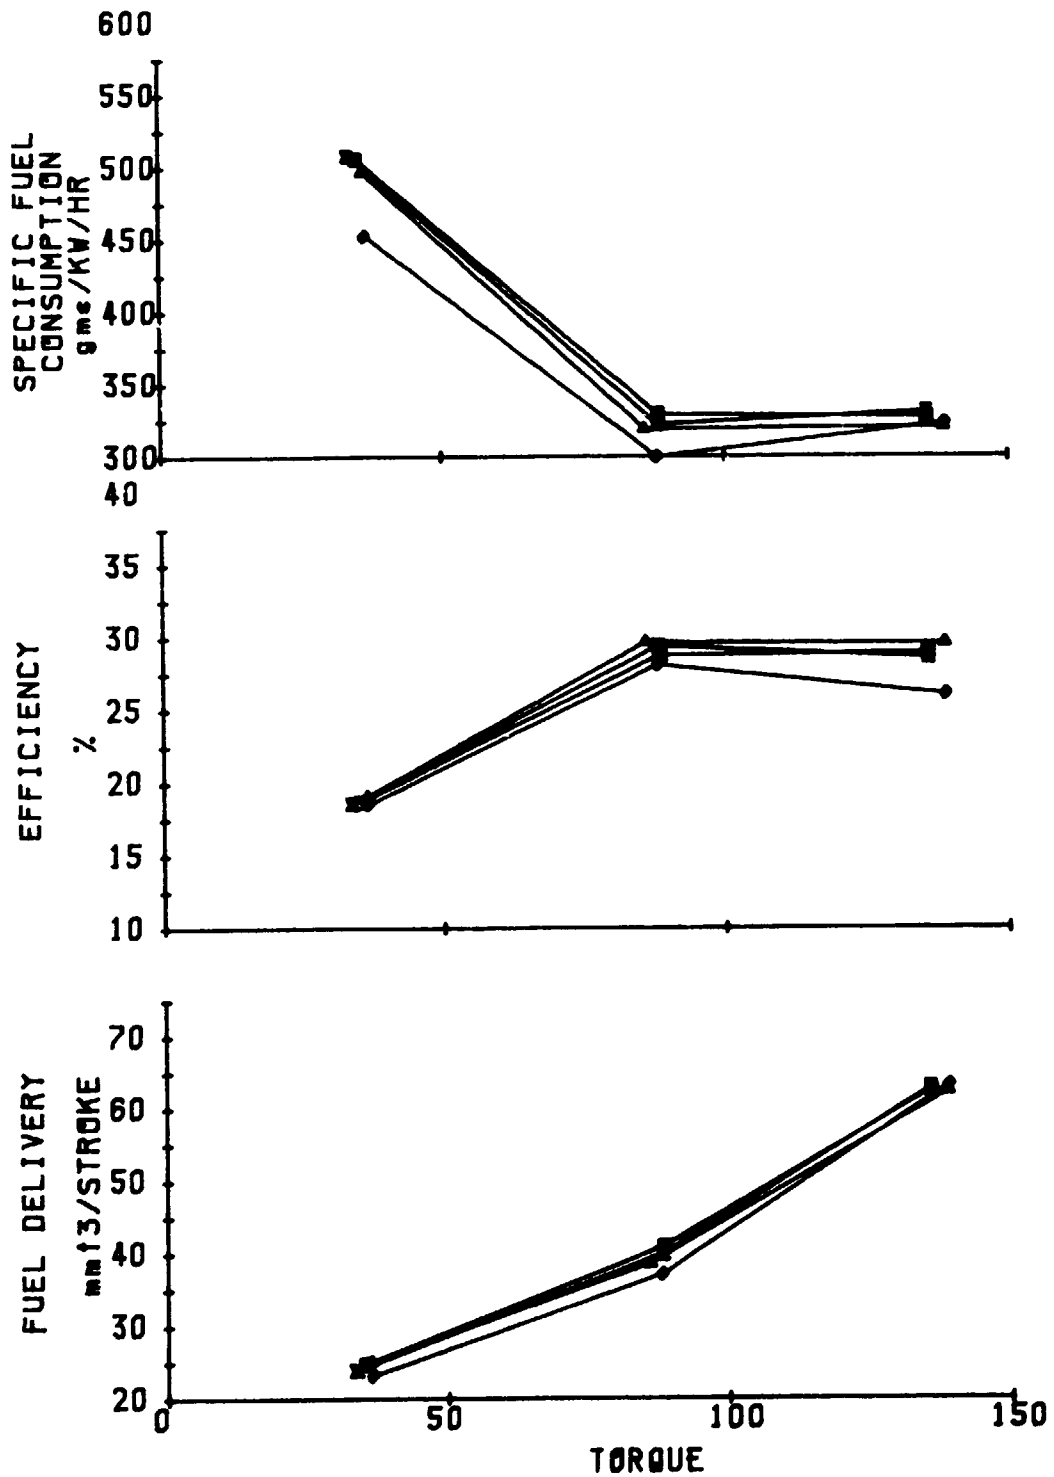


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ DIST 100 ■ E20 ▲ E20/.210N ⊠ E20/.410N
EFFECT OF ION ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP48	

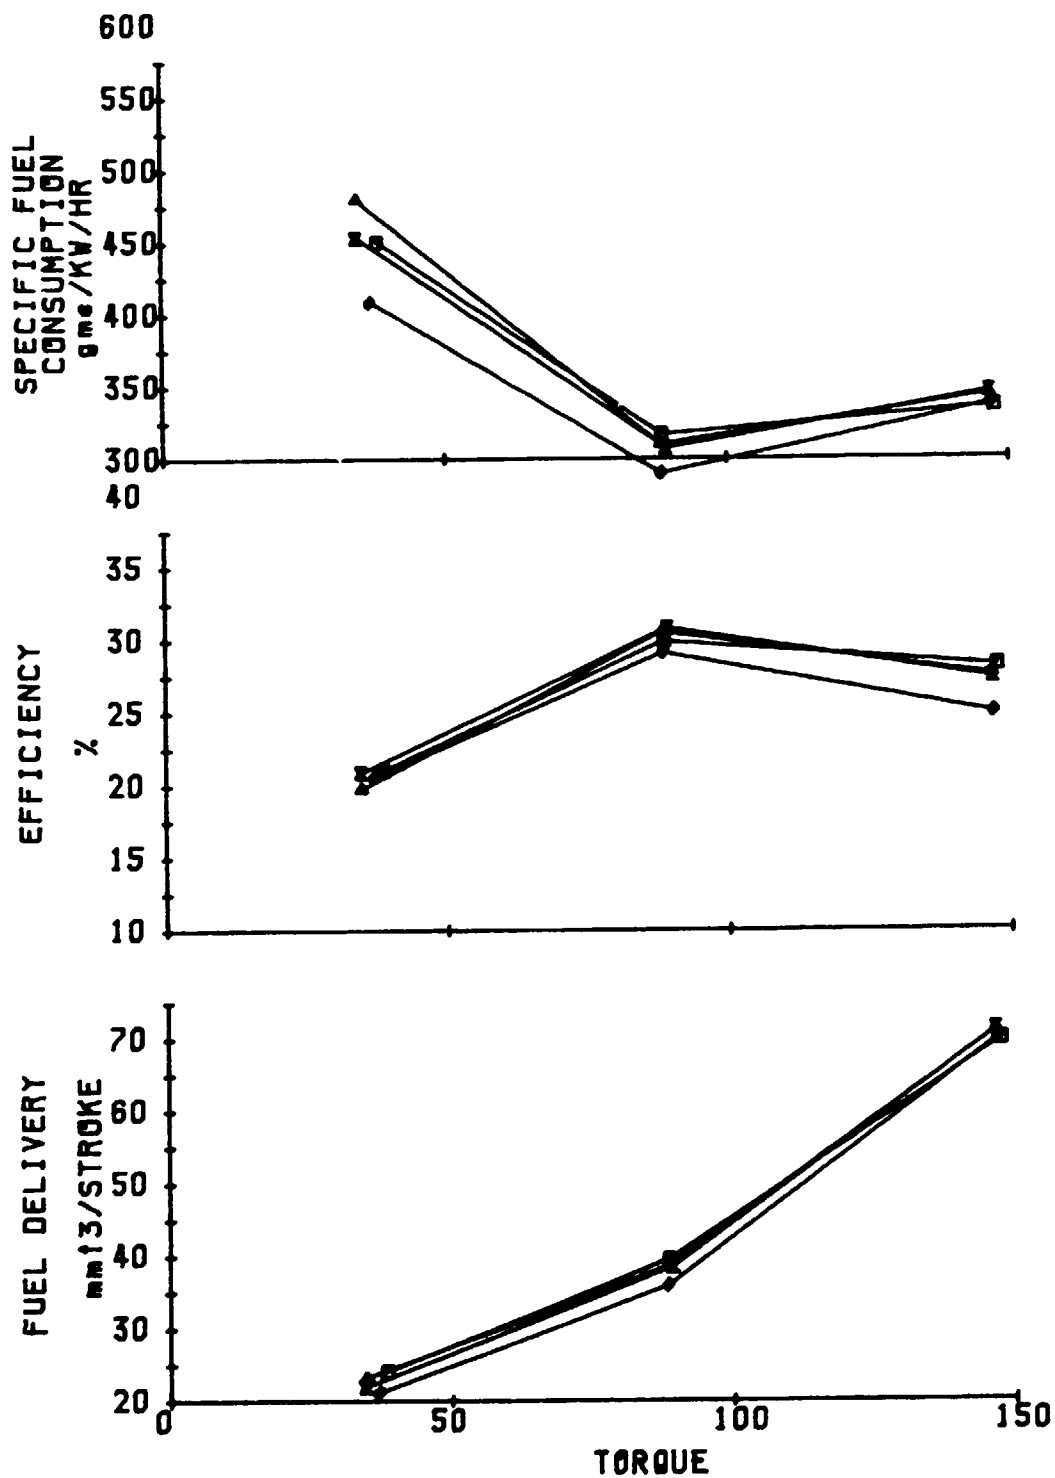

ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E20 ▲ E20/.210N ⊠ E20/.410N
EFFECT OF ION ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
1400 R.P.M.	
FIG AP49	

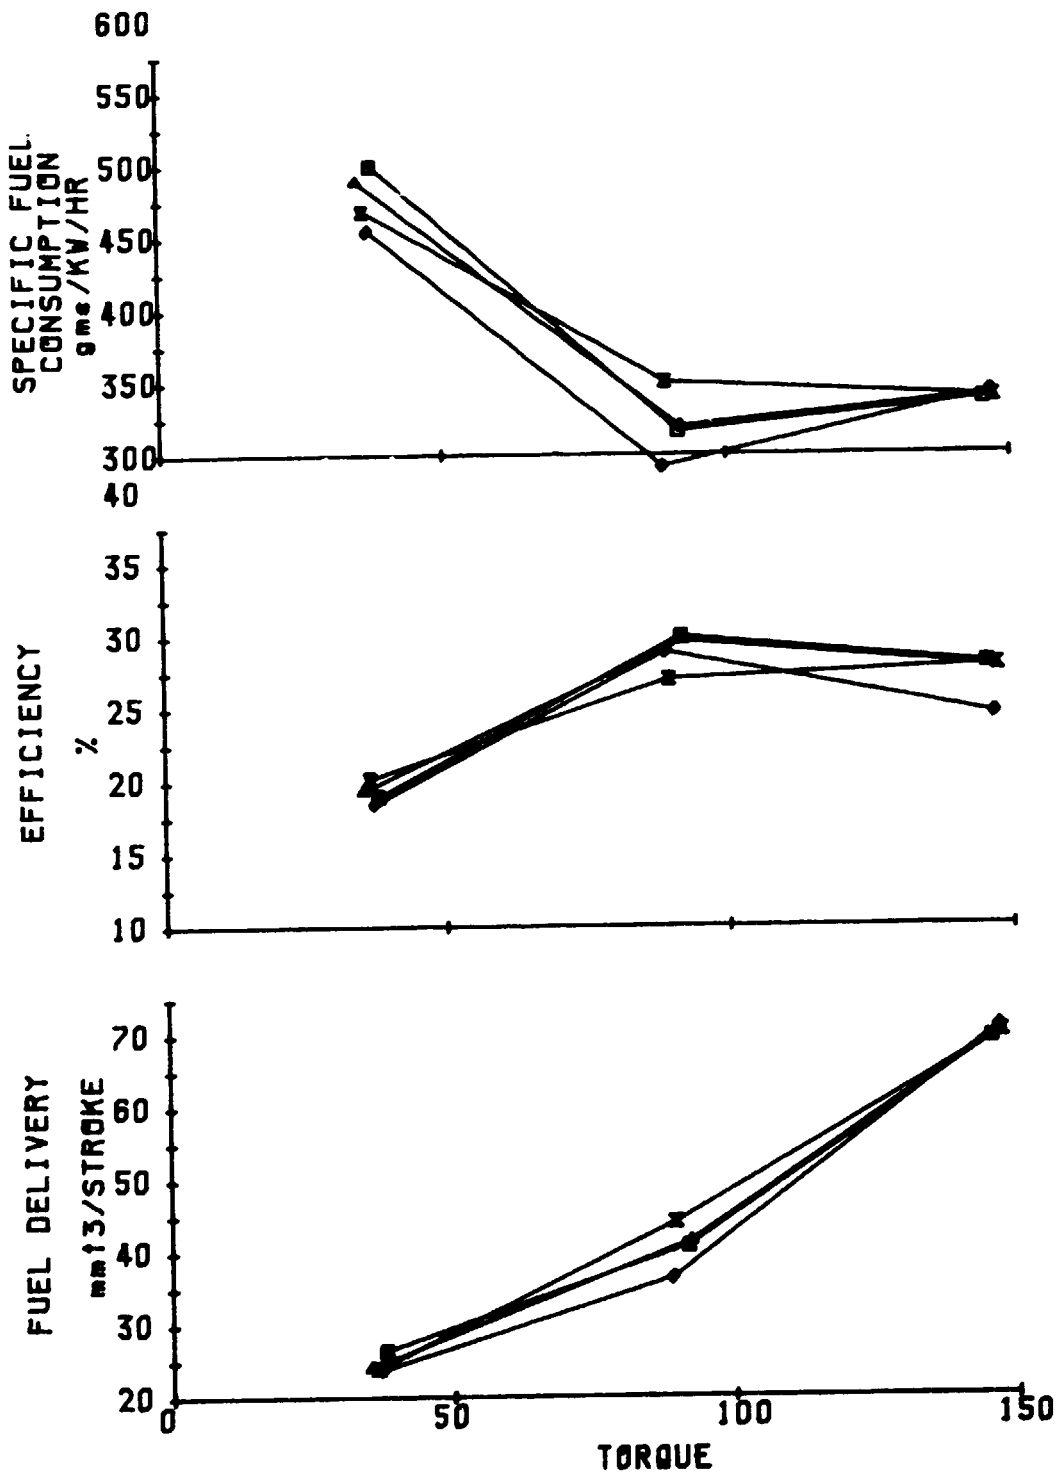

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> • DIST 100 ■ E20 ▲ E20/.210N × E20/.410N
EFFECT OF ION ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP50	

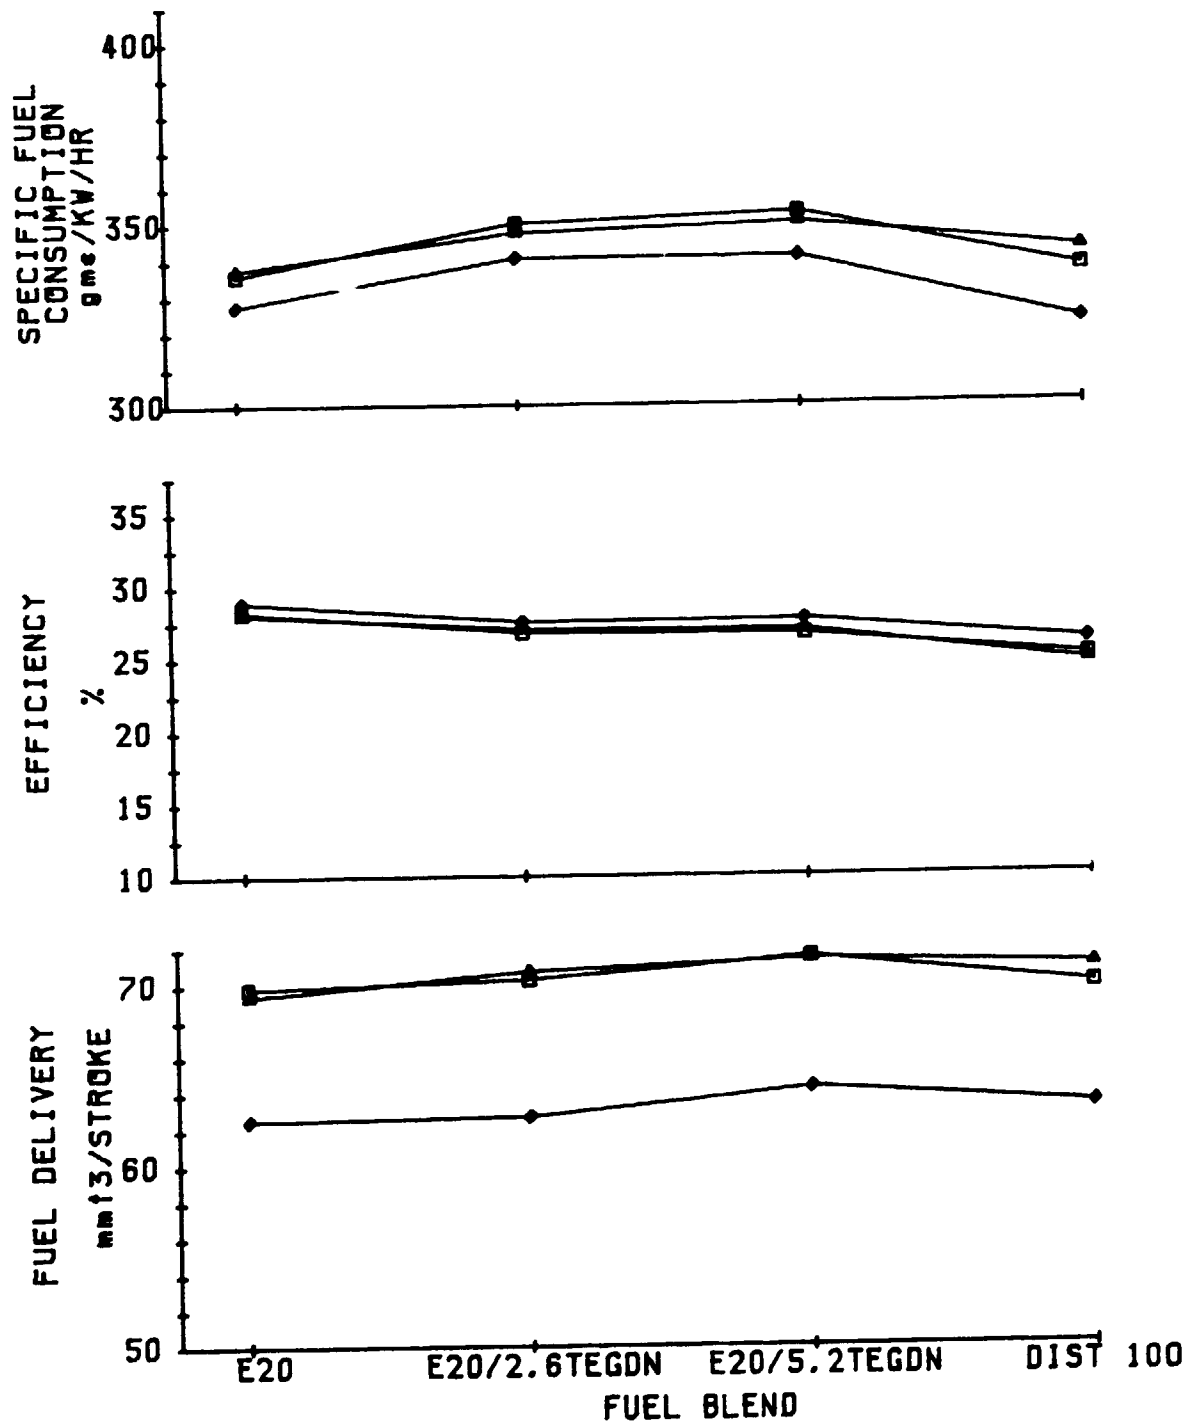


ENGINE : FORD 3000
CAPACITY: 2860

♦ 2000 R.P.M.
■ 1400 R.P.M.
▲ 800 R.P.M.

EFFECT OF TEGDN ON
INJECTION PUMP DELIVERY,
EFFICIENCY & S.F.C.

FULL LOAD

FIG AP51

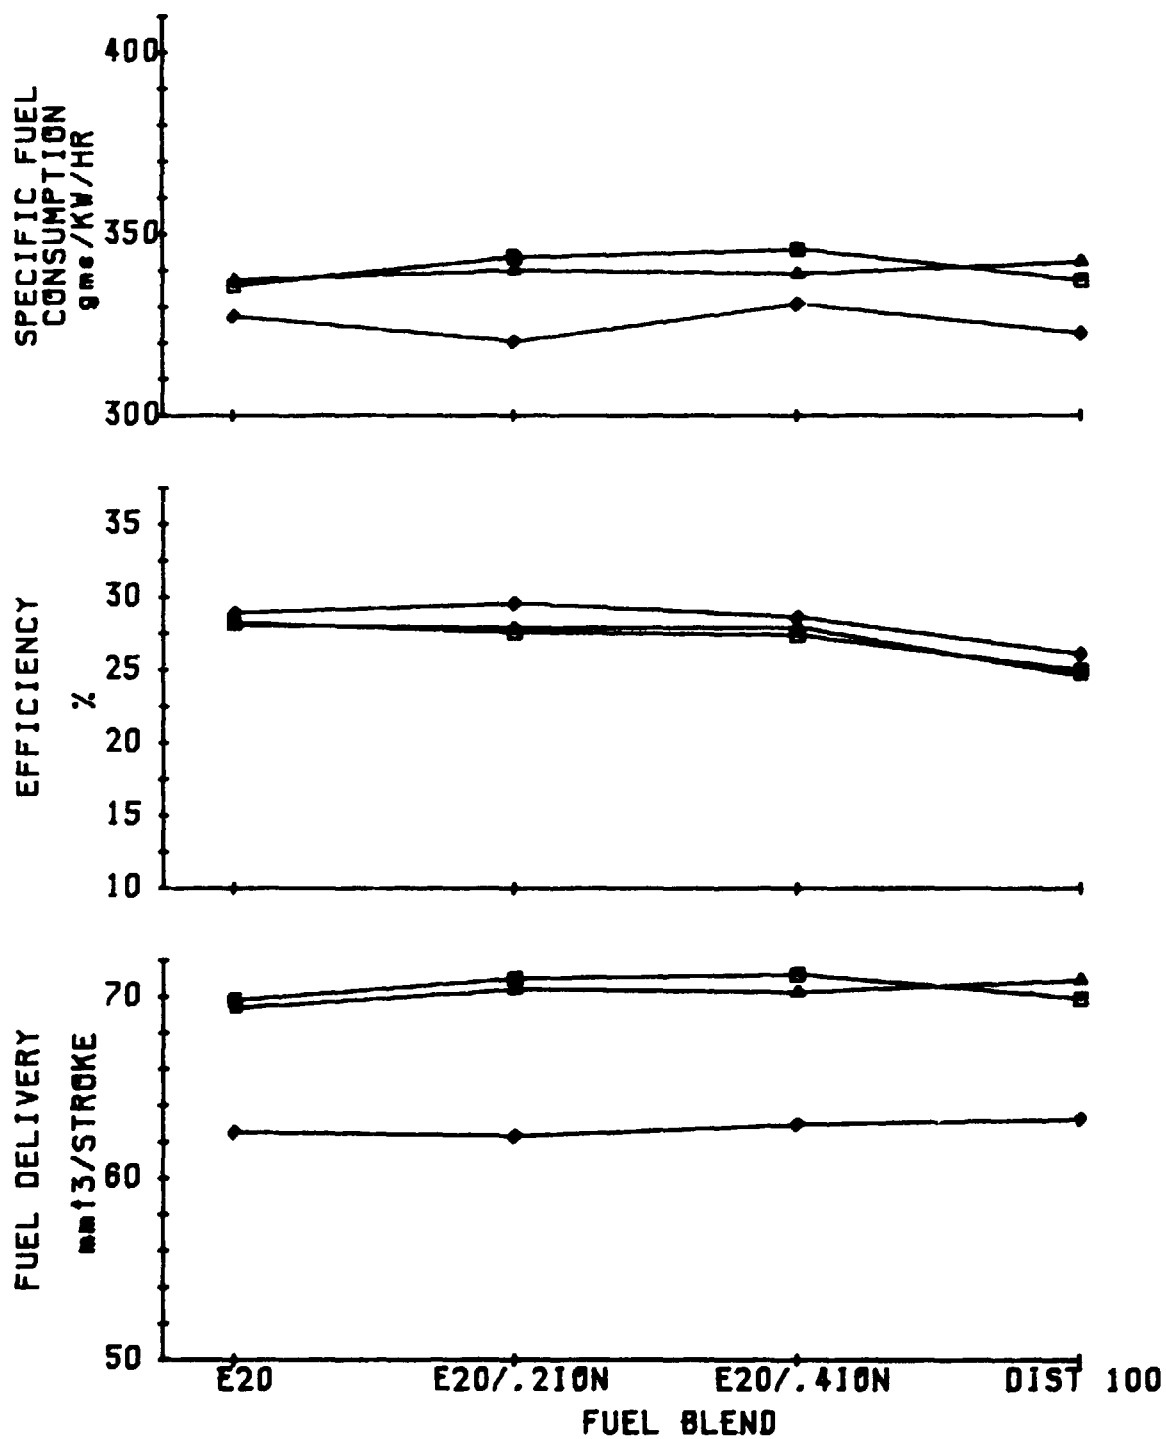


ENGINE : FORD 3000
CAPACITY: 2860

♦ 2000 R.P.M.
■ 1400 R.P.M.
▲ 600 R.P.M.


EFFECT OF ION ON
INJECTION PUMP DELIVERY,
EFFICIENCY & S.F.C.

FULL LOAD

FIG AP52

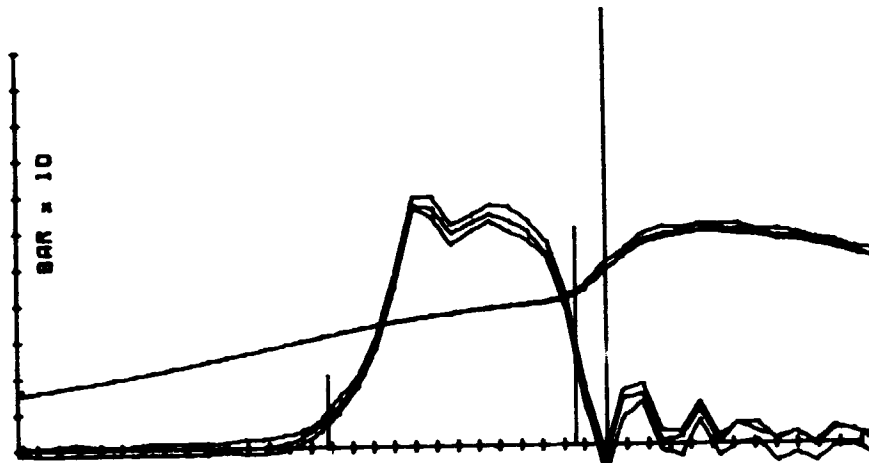

AVERAGE
 TORQUE : 35
 R.P.M. : 2044
 START OF
 INJN. : 13.2
 COMON. : 1.4
 DELAY
 DEGREES : 11.8
 MS : .885
 MAXIMUM
 PRESSURE: 60.1
 RATE : 5.5
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 167

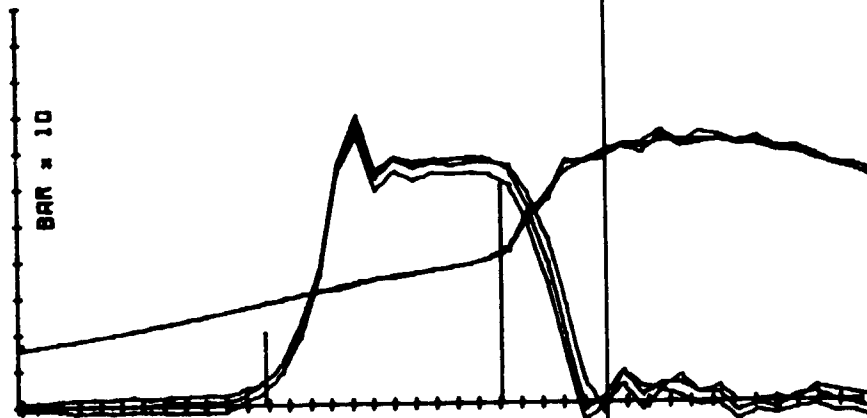


AVERAGE
 TORQUE : 90
 R.P.M. : 2050
 START OF
 INJN. : 16.2
 COMON. : 5
 DELAY
 DEGREES : 11.2
 MS : .812
 MAXIMUM
 PRESSURE: 73.4
 RATE : 8.1
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 279



AVERAGE
 TORQUE : 145
 R.P.M. : 2054
 START OF
 INJN. : 21.2
 COMON. : 8.5
 DELAY
 DEGREES : 11.7
 MS : .852
 MAXIMUM
 PRESSURE: 85.4
 RATE : 14
 TEMPERATURES
 AIR INLET: 31
 EXHAUST : 420

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : J1ST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UNJ0010	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP53	

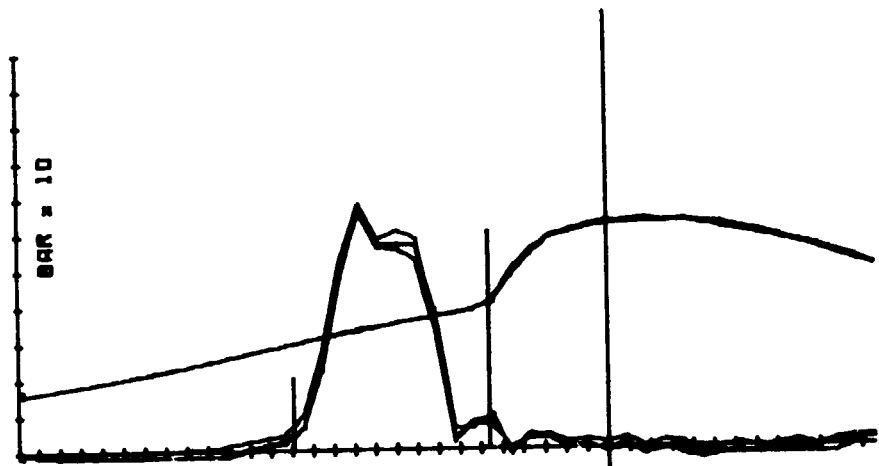

AVERAGE
 TORQUE : 30
 R.P.M. : 1438
 START OF
 INJN. : 14.8
 COMMON. : 5.6
 DELAY
 DEGREES : 9.3
 MS : 1.061
 MAXIMUM
 PRESSURE: 63.2
 RATE : 7.5
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 151




AVERAGE
 TORQUE : 69
 R.P.M. : 1447
 START OF
 INJN. : 17.6
 COMMON. : 6.8
 DELAY
 DEGREES : 9
 MS : 1.038
 MAXIMUM
 PRESSURE: 78
 RATE : 9.6
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 225

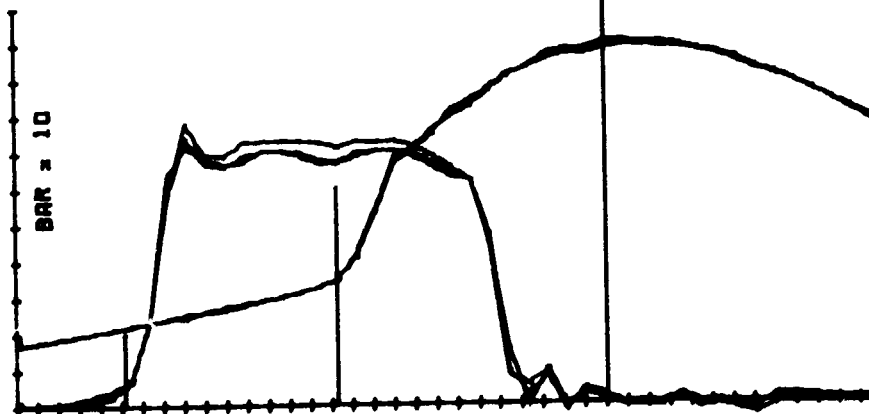


AVERAGE
 TORQUE : 154
 R.P.M. : 1432
 START OF
 INJN. : 22.6
 COMMON. : 12.6
 DELAY
 DEGREES : 10
 MS : 1.173
 MAXIMUM
 PRESSURE: 98.5
 RATE : 14.1
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 405

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2880	C.V. : 42.75
TEST ID. : UN10010	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP54	

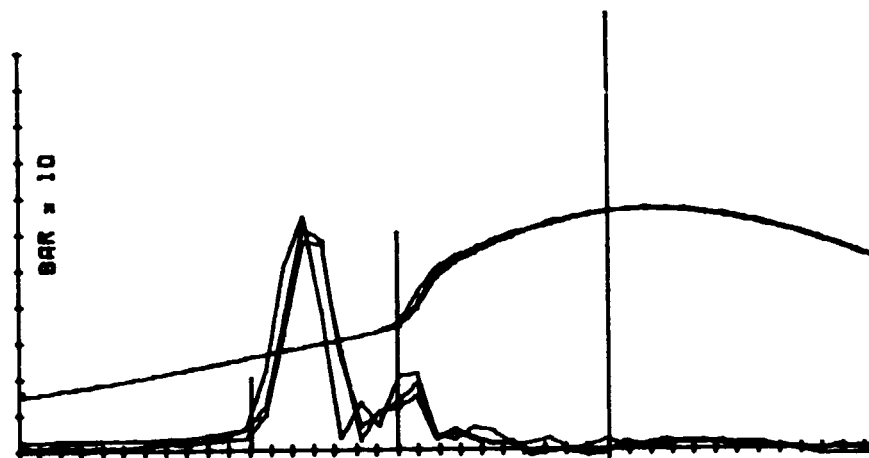

AVERAGE
 TORQUE : 37
 R.P.M. : 843
 START OF
 INJN. : 16.9
 COMMON. : 10
 DELAY
 DEGREES : 6.9
 MS : 1.371
 MAXIMUM
 PRESSURE: 66.4
 RATE : 6.4
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 138

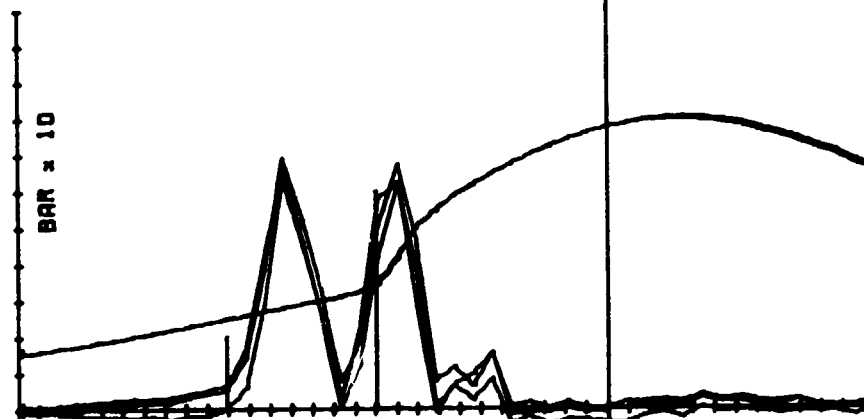


AVERAGE
 TORQUE : 90
 R.P.M. : 833
 START OF
 INJN. : 18
 COMMON. : 11
 DELAY
 DEGREES : 7
 MS : 1.416
 MAXIMUM
 PRESSURE: 79.6
 RATE : 6.2
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 200



AVERAGE
 TORQUE : 158
 R.P.M. : 844
 START OF
 INJN. : 20.1
 COMMON. : 12.7
 DELAY
 DEGREES : 7.4
 MS : 1.453
 MAXIMUM
 PRESSURE: 95.7
 RATE : 10.9
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 327


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN10010	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP55	

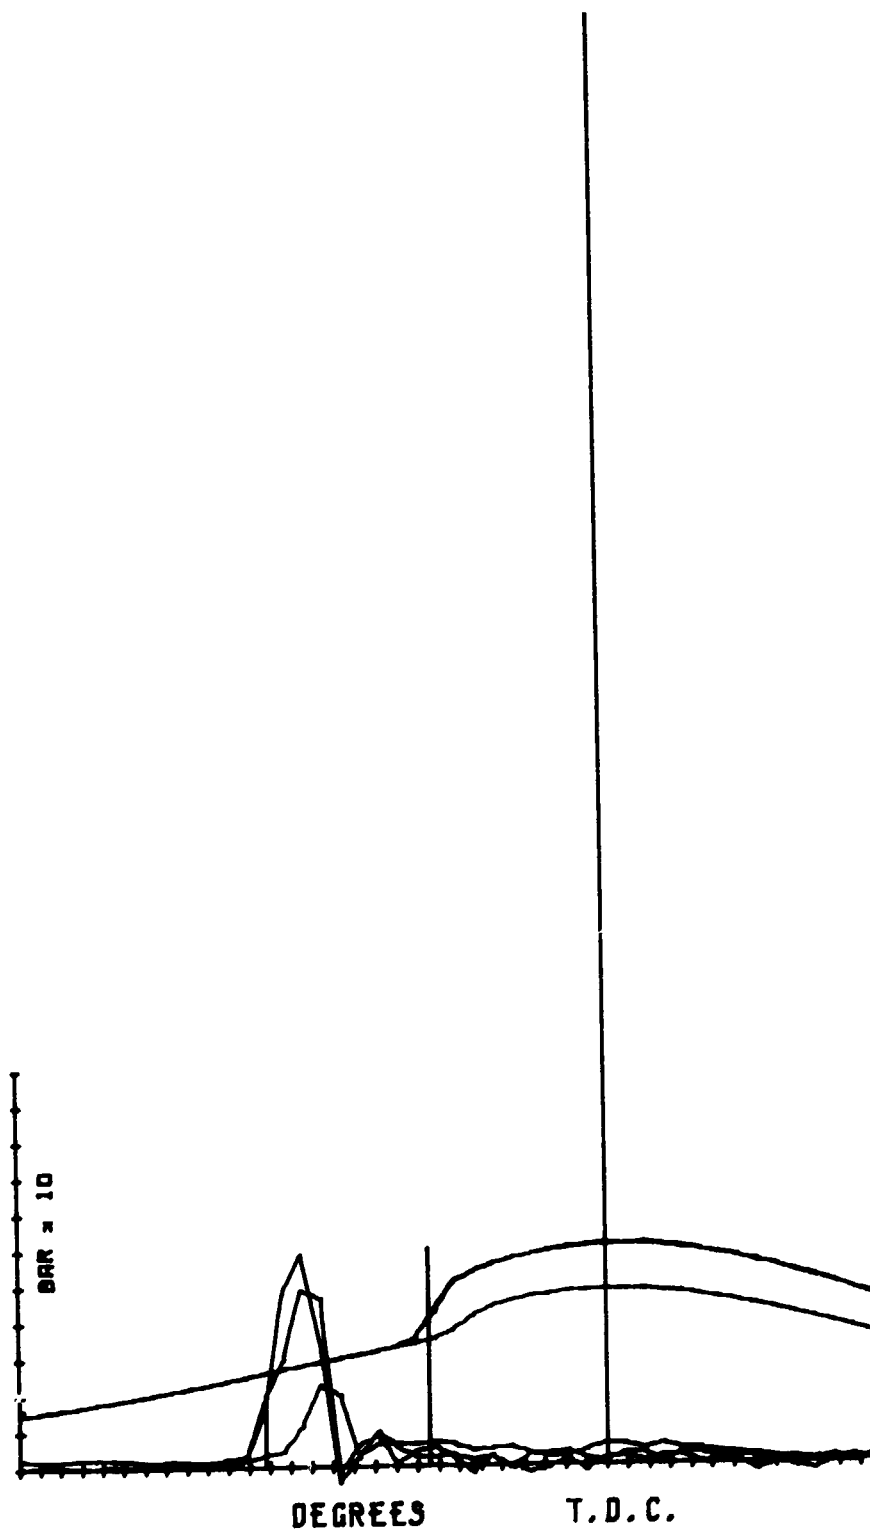


AVERAGE
 TORQUE : 3
 R.P.M. : 616
 START OF
 INJN. : 10.2
 COMMON : 6.5
 DELAY
 DEGREES : 7.7
 MS : 1.574
 MAXIMUM
 PRESSURE: 58.9
 RATE : 8.9
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 97


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNJ0010	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP56	

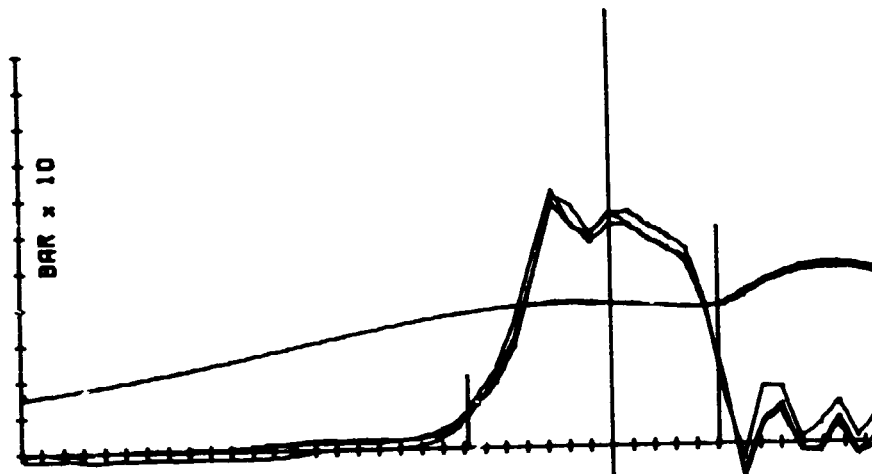

AVERAGE
 TORQUE : 37
 R.P.M. : 2030
 START OF
 INJN. : 6.8
 COMBN. : -5.1
 DELAY
 DEGREES : 11.9
 MS : .977
 MAXIMUM
 PRESSURE: 49.3
 RATE : 3
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 200

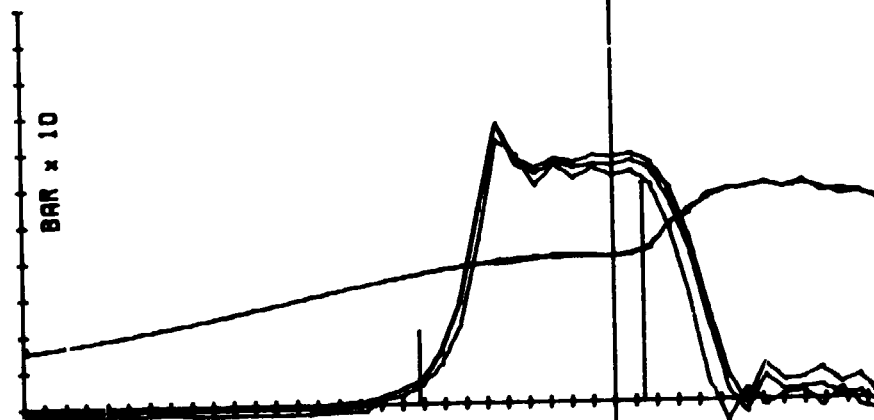


AVERAGE
 TORQUE : 89
 R.P.M. : 2050
 START OF
 INJN. : 9.2
 COMBN. : -1.4
 DELAY
 DEGREES : 10.6
 MS : .865
 MAXIMUM
 PRESSURE: 60.3
 RATE : 6.4
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 276

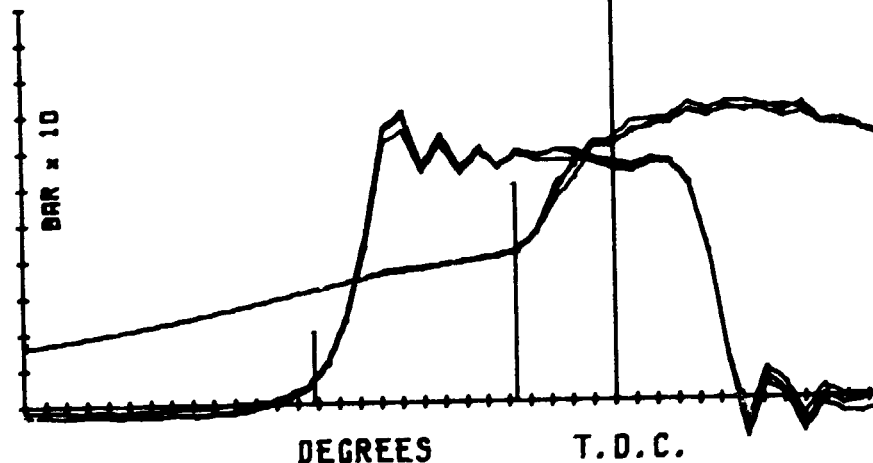


AVERAGE
 TORQUE : 153
 R.P.M. : 2052
 START OF
 INJN. : 14.2
 COMBN. : 4.8
 DELAY
 DEGREES : 9.6
 MS : .777
 MAXIMUM
 PRESSURE: 61.5
 RATE : 10.1
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 424


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN10012	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP57	

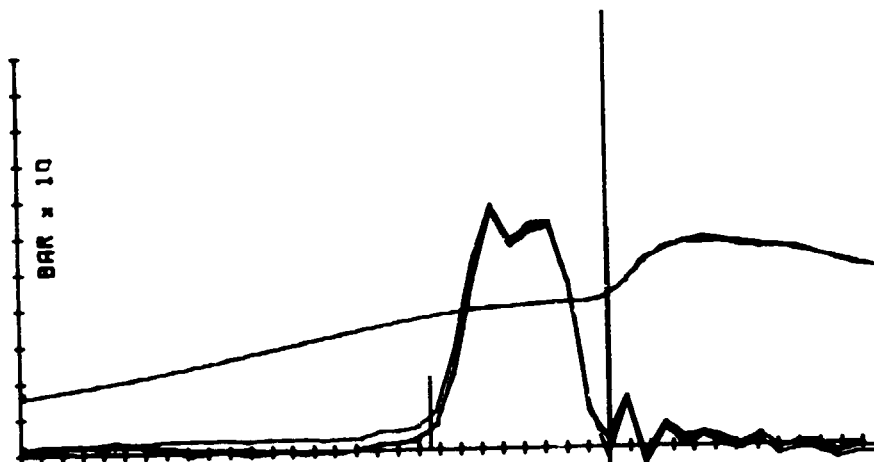

AVERAGE
 TORQUE : 38
 R.P.M. : 1428
 START OF
 INJN. : 6.4
 COMBN. : -.1
 DELAY
 DEGREES : 6.5
 MS : .995
 MAXIMUM
 PRESSURE: 56.6
 RATE : 6.1
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 154

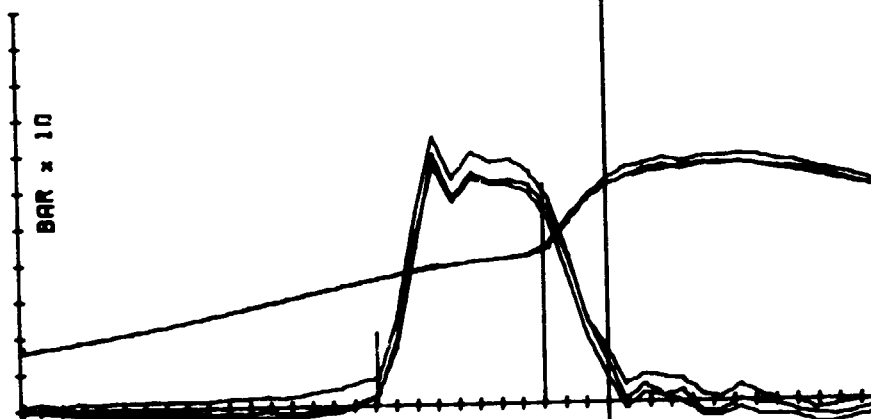


AVERAGE
 TORQUE : 89
 R.P.M. : 1450
 START OF
 INJN. : 10.9
 COMBN. : 2.9
 DELAY
 DEGREES : 8
 MS : .916
 MAXIMUM
 PRESSURE: 66.6
 RATE : 7.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 229

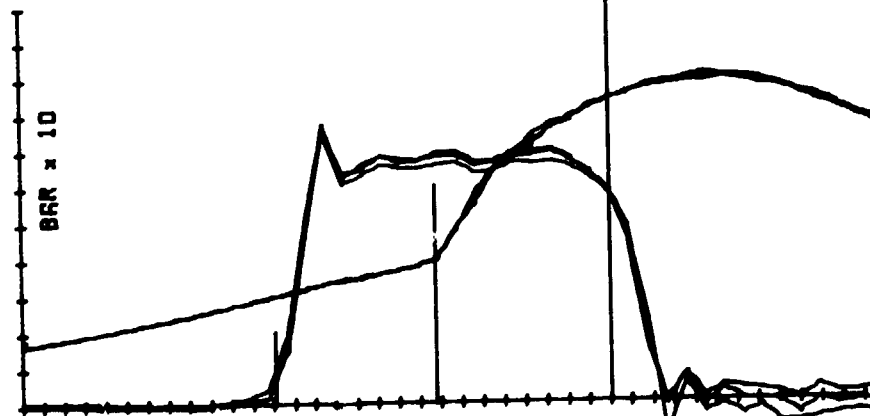


AVERAGE
 TORQUE : 106
 R.P.M. : 1426
 START OF
 INJN. : 15.9
 COMBN. : 6.2
 DELAY
 DEGREES : 7.7
 MS : .898
 MAXIMUM
 PRESSURE: 89.6
 RATE : 9.9
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 406

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UN10012	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP58	

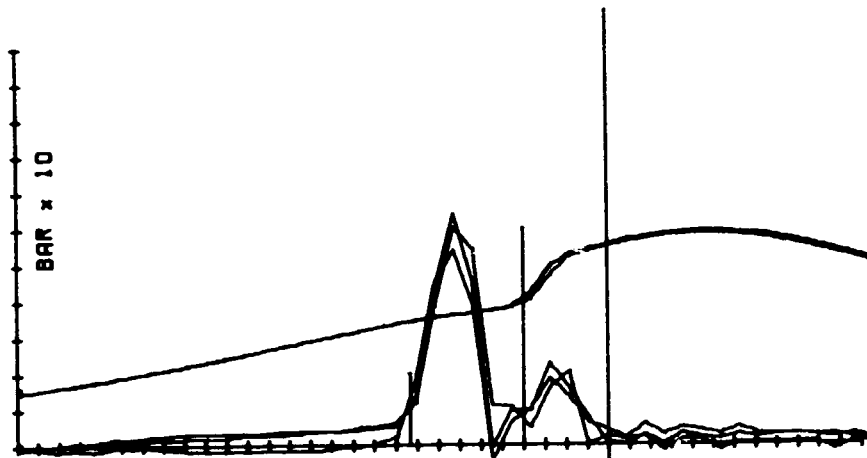

AVERAGE
 TORQUE : 34
 R.P.M. : 796
 START OF
 INJN. : 9.3
 COMBN. : 4
 DELAY
 DEGREES : 5.3
 MS : 1.12
 MAXIMUM
 PRESSURE: 58.2
 RATE : 8.9
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 129

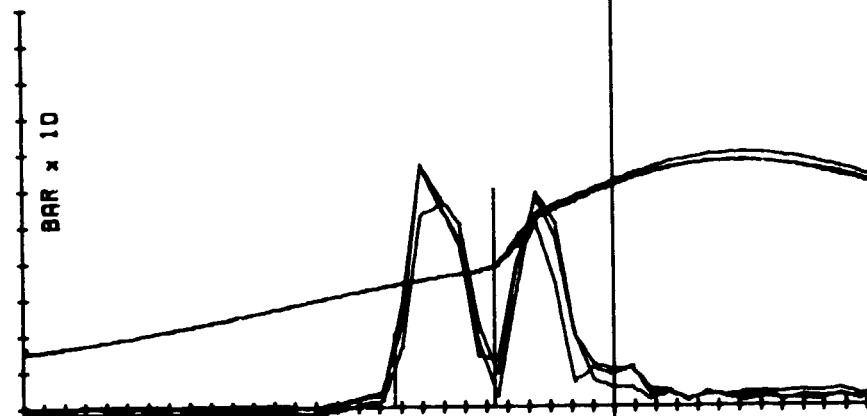


AVERAGE
 TORQUE : 95
 R.P.M. : 812
 START OF
 INJN. : 10.3
 COMBN. : 5.6
 DELAY
 DEGREES : 4.7
 MS : .977
 MAXIMUM
 PRESSURE: 69.1
 RATE : 7.4
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 199

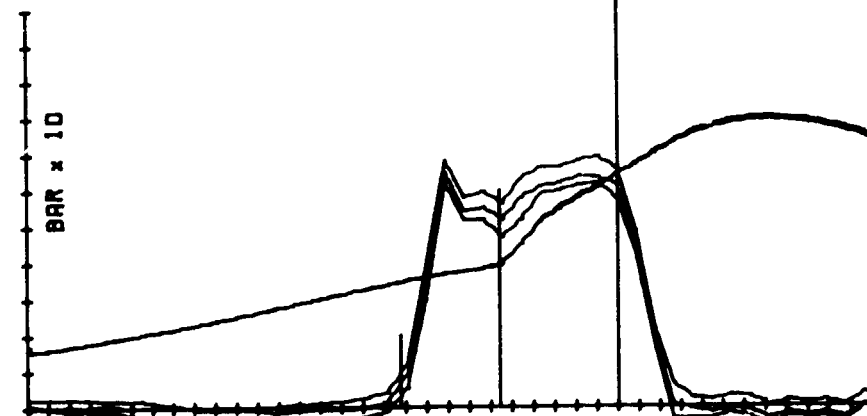

AVERAGE
 TORQUE : 165
 R.P.M. : 825
 START OF
 INJN. : 10.2
 COMBN. : 5.6
 DELAY
 DEGREES : 4.6
 MS : .948
 MAXIMUM
 PRESSURE: 79.9
 RATE : 6.3
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 319


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNJD012	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP59	

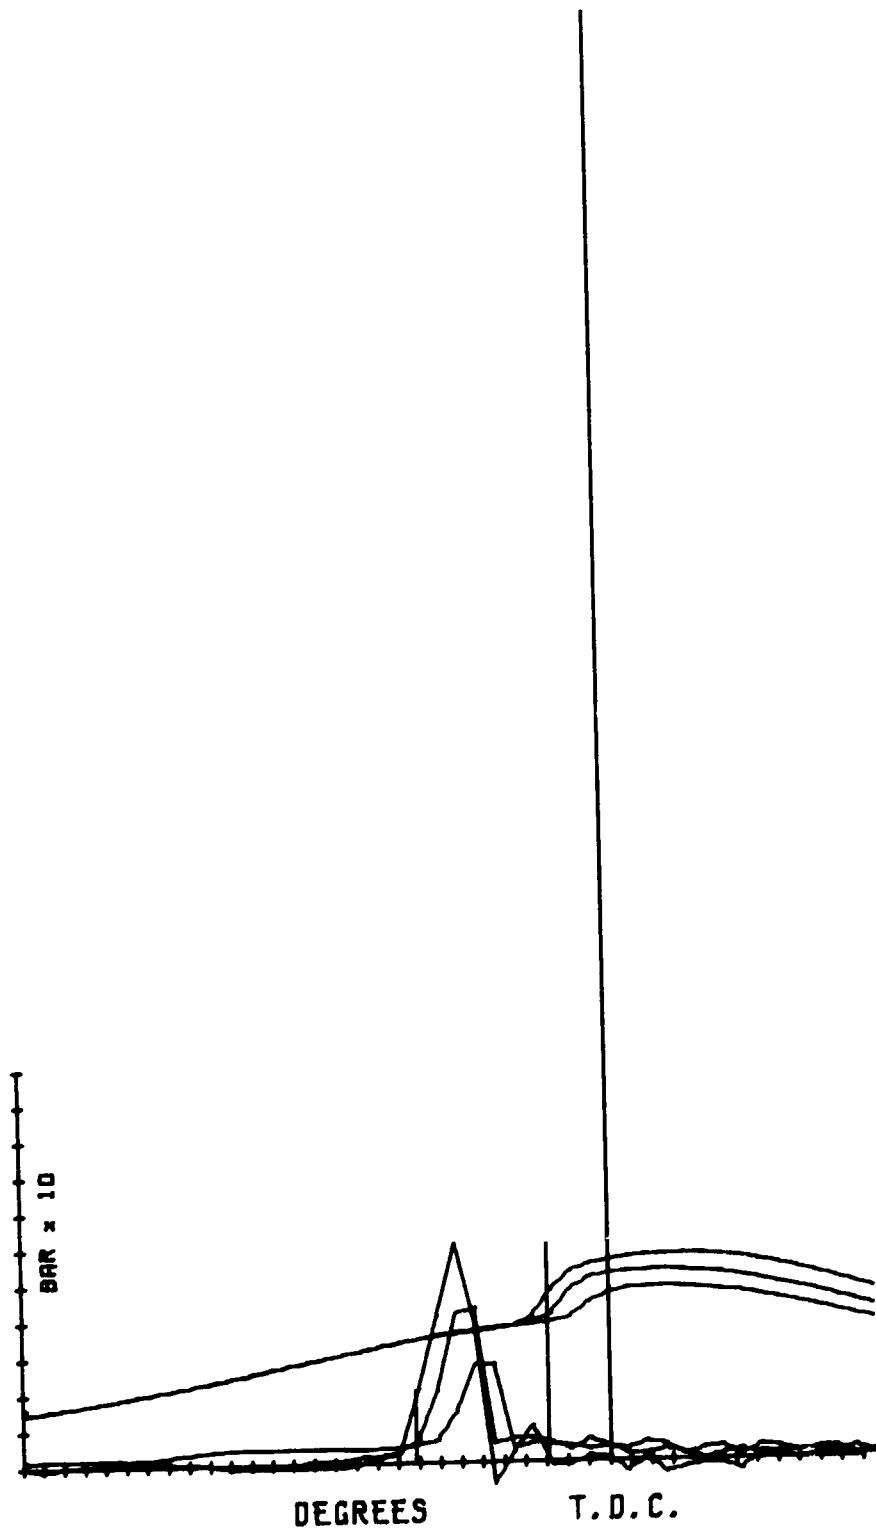


AVERAGE
 TORQUE : 3
 R.P.M. : 828
 START OF
 INJN. : 9.2
 COMB. : 2.9
 DELAY
 DEGREES : 8.3
 MS : 1.288
 MAXIMUM
 PRESSURE: 52.3
 RATE : 5.7
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 94


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN10012	DENSITY : .649
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP60	

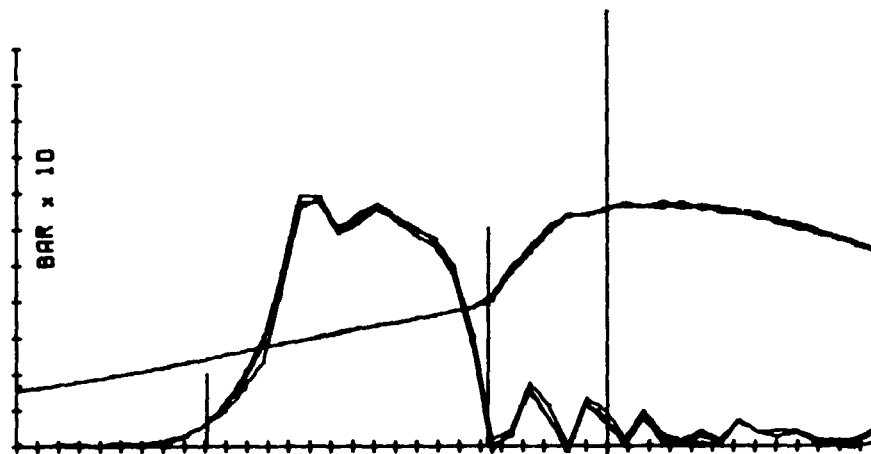

AVERAGE
 TORQUE : 37
 R.P.M. : 2046
 START OF
 INJN. : 18.9
 COMBN. : 5.6
 DELAY
 DEGREES : 13.3
 MS : 1.081
 MAXIMUM
 PRESSURE: 66.9
 RATE : 7.5
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 193

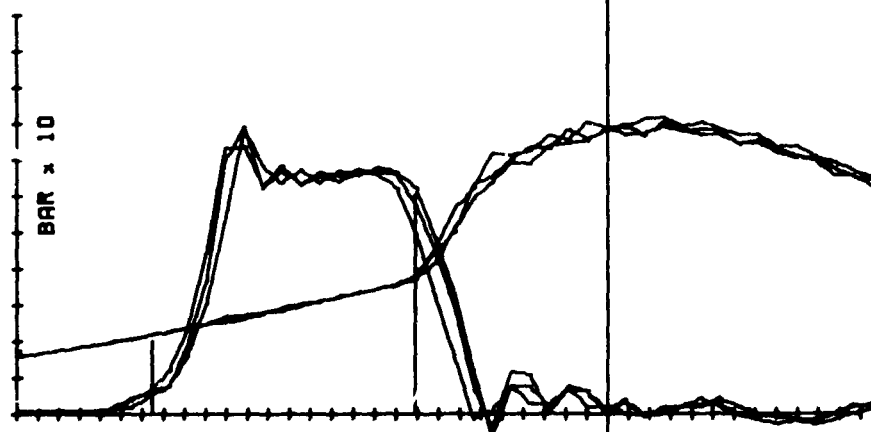


AVERAGE
 TORQUE : 92
 R.P.M. : 2050
 START OF
 INJN. : 21.6
 COMBN. : 9.1
 DELAY
 DEGREES : 12.5
 MS : 1.013
 MAXIMUM
 PRESSURE: 80.3
 RATE : 11.2
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 297

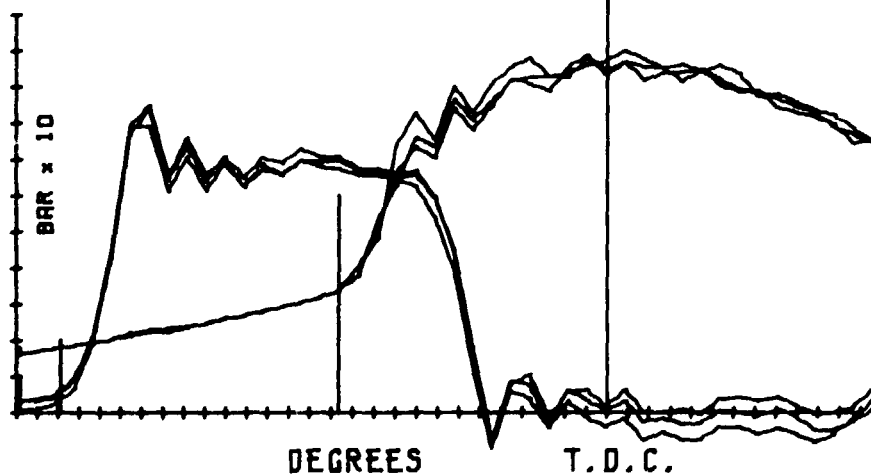


AVERAGE
 TORQUE : 130
 R.P.M. : 2050
 START OF
 INJN. : 25.9
 COMBN. : 12.7
 DELAY
 DEGREES : 13.2
 MS : 1.073
 MAXIMUM
 PRESSURE: 99.5
 RATE : 19.8
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 410


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN10011	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP61	

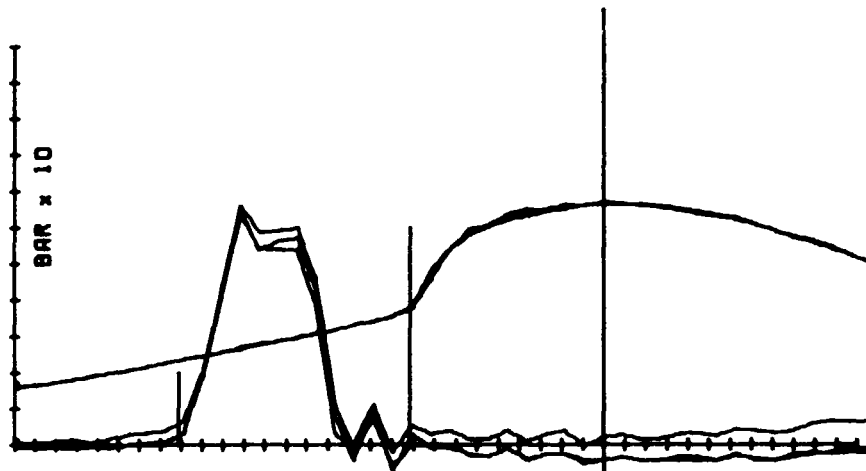

AVERAGE
 TORQUE : 34
 R.P.M. : 1425
 START OF
 INJN. : 20.1
 COMB. : 9.1
 DELAY
 DEGREES : 11
 μS : 1.263
 MAXIMUM
 PRESSURE: 86.9
 RATE : 8.8
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 151

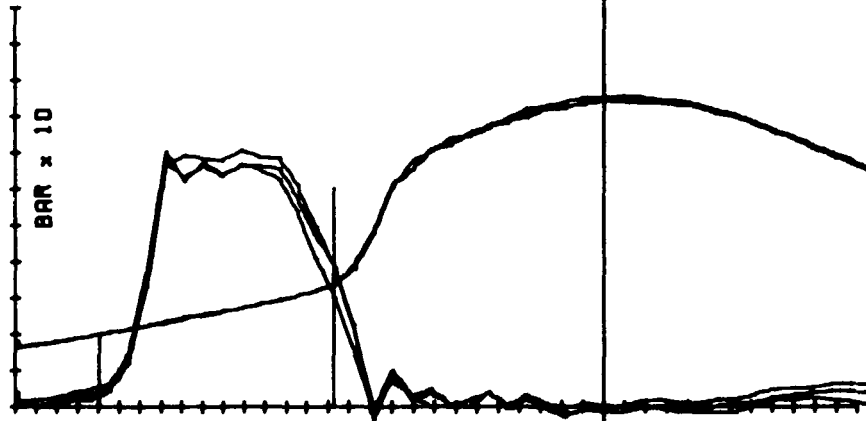


AVERAGE
 TORQUE : 81
 R.P.M. : 1432
 START OF
 INJN. : 24
 COMB. : 12.7
 DELAY
 DEGREES : 11.3
 μS : 1.308
 MAXIMUM
 PRESSURE: 85.2
 RATE : 12.7
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 239

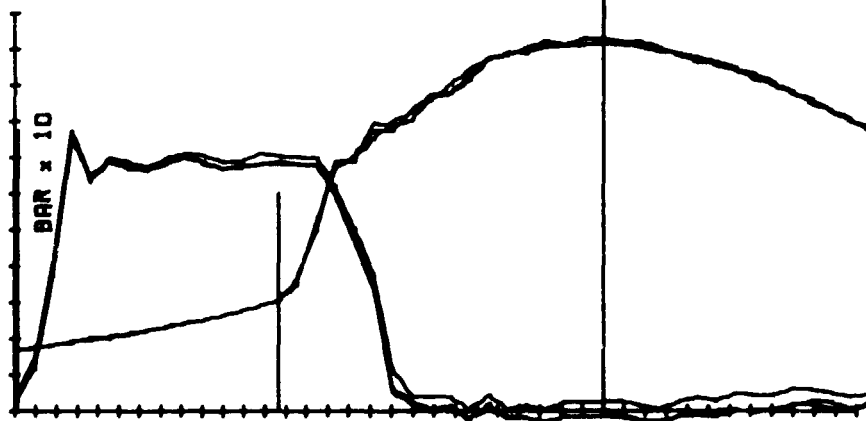


AVERAGE
 TORQUE : 142
 R.P.M. : 1434
 START OF
 INJN. : 27.8
 COMB. : 15.4
 DELAY
 DEGREES : 12.5
 μS : 1.448
 MAXIMUM
 PRESSURE: 102.7
 RATE : 17.2
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 397

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UN10011	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP62	

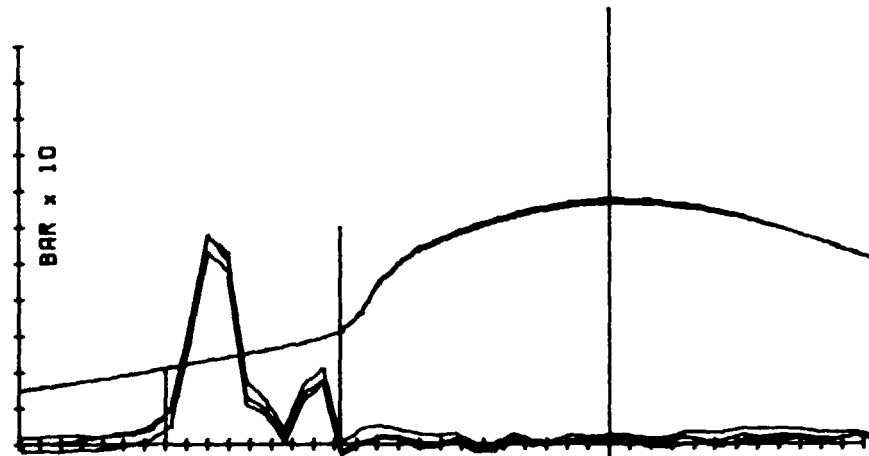

AVERAGE
 TORQUE : 36
 R.P.M. : 821
 START OF
 INJN. : 21
 COMBN. : 12.7
 DELAY
 DEGREES : 8.3
 MS : 1.677
 MAXIMUM
 PRESSURE: 67.2
 RATE : 8.2
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 128

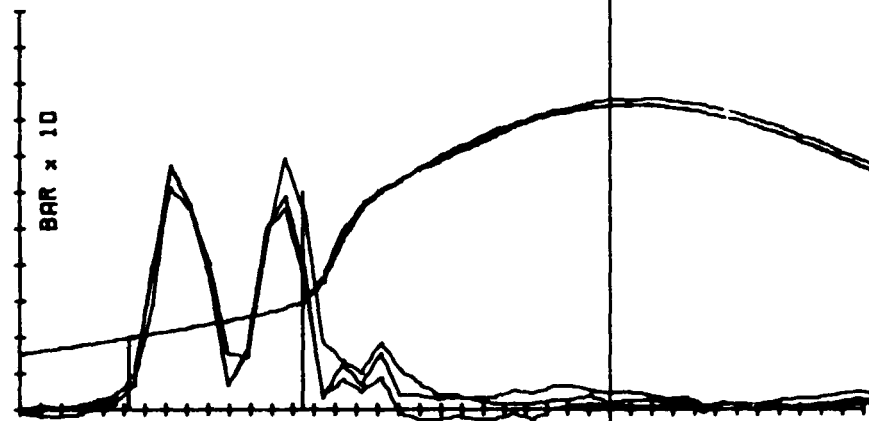


AVERAGE
 TORQUE : 90
 R.P.M. : 815
 START OF
 INJN. : 22.8
 COMBN. : 14.6
 DELAY
 DEGREES : 8.2
 MS : 1.684
 MAXIMUM
 PRESSURE: 84.2
 RATE : 12.1
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 212



AVERAGE
 TORQUE : 146
 R.P.M. : 826
 START OF
 INJN. : 22.5
 COMBN. : 14.6
 DELAY
 DEGREES : 7.9
 MS : 1.589
 MAXIMUM
 PRESSURE: 96.7
 RATE : 12.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 324


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNID011	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP63	

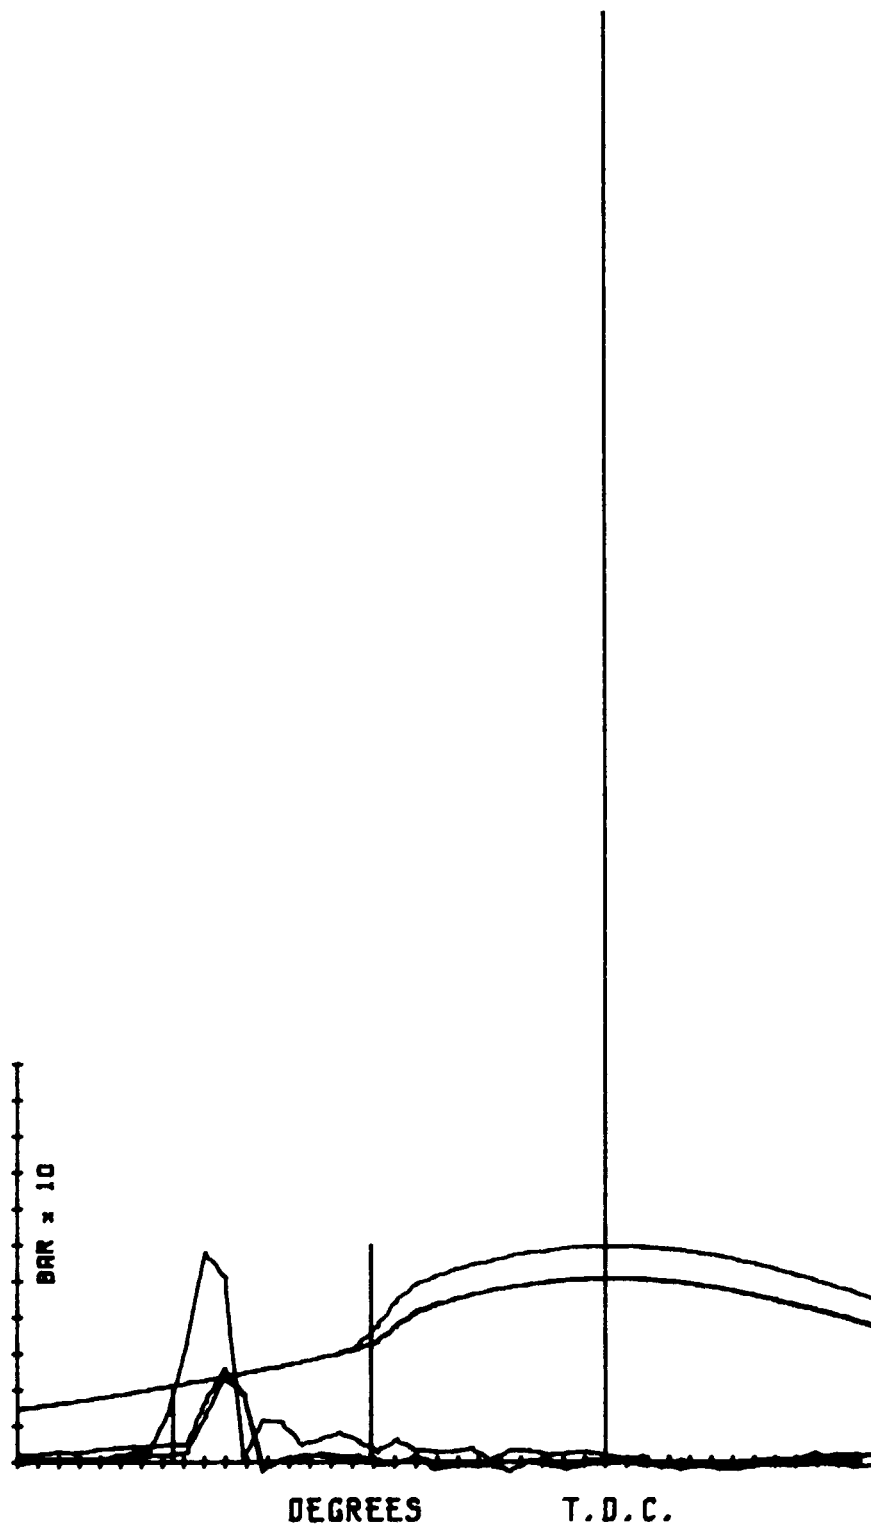


AVERAGE
 TORQUE : 3
 R.P.M. : 626
 START OF
 INJN. : 20.5
 COMBN. : 11.1
 DELAY
 DEGREES : 9.4
 MS : 1.696
 MAXIMUM
 PRESSURE: 52.4
 RATE : 4.8
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 89


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UN1D011	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP64	

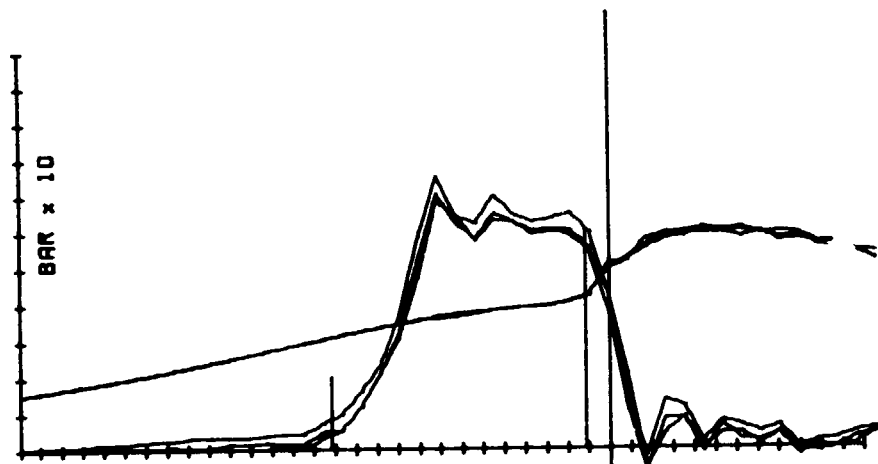

AVERAGE
 TORQUE : 36
 R.P.M. : 2032
 START OF
 INJN. : 13.2
 COMBN. : 1.1
 DELAY
 DEGREES : 12.1
 MS : .994
 MAXIMUM
 PRESSURE: 60.1
 RATE : 6.9
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 186

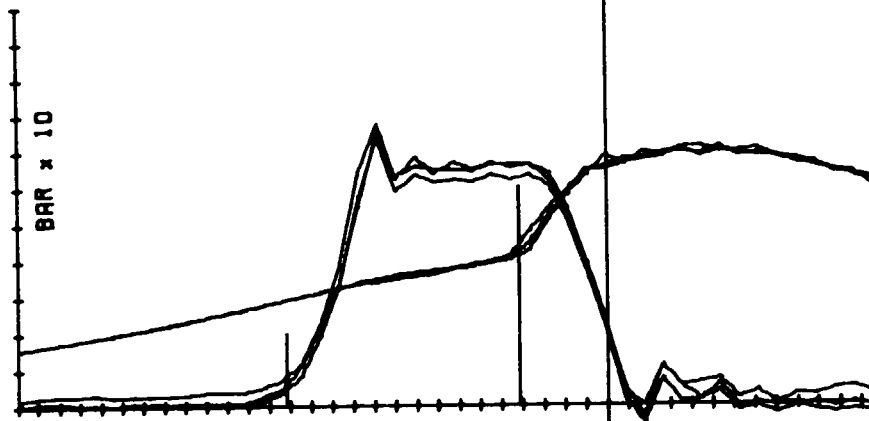


AVERAGE
 TORQUE : 88
 R.P.M. : 2038
 START OF
 INJN. : 15.2
 COMBN. : 4.1
 DELAY
 DEGREES : 11.1
 MS : .906
 MAXIMUM
 PRESSURE: 71.2
 RATE : 8.8
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 275

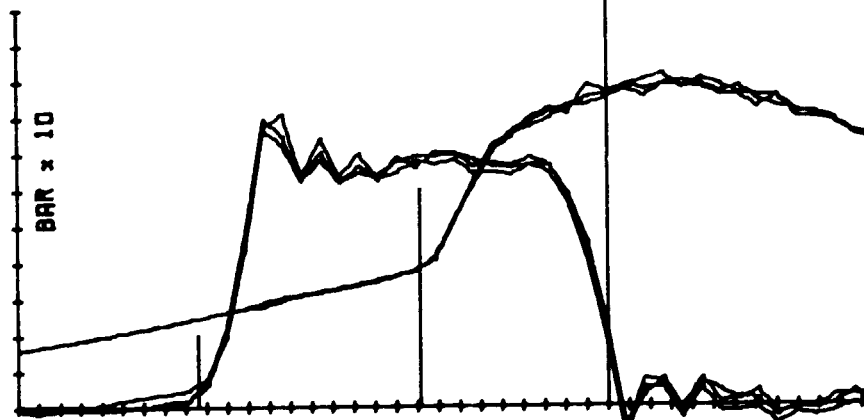


AVERAGE
 TORQUE : 140
 R.P.M. : 2026
 START OF
 INJN. : 19.4
 COMBN. : 8.9
 DELAY
 DEGREES : 10.5
 MS : .888
 MAXIMUM
 PRESSURE: 90.8
 RATE : 12.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 381

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10014	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP65	

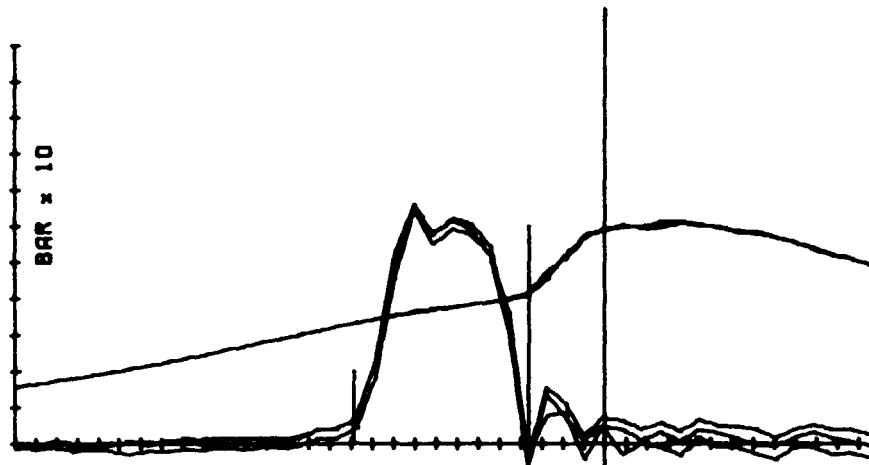

AVERAGE
 TORQUE : 35
 R.P.M. : 1440
 START OF
 INJN. : 11.9
 COMON. : 3.6
 DELAY
 DEGREES : 6.3
 MS : .96
 MAXIMUM
 PRESSURE: 60.5
 RATE : 6.2
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 149

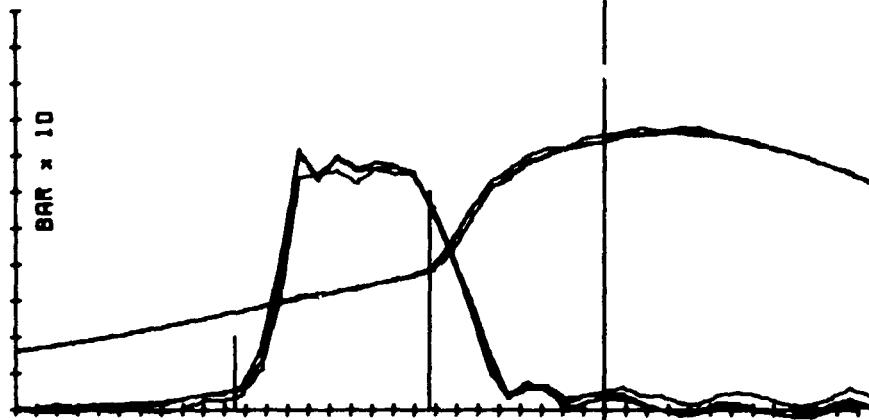


AVERAGE
 TORQUE : 65
 R.P.M. : 1445
 START OF
 INJN. : 17.5
 COMON. : 6.3
 DELAY
 DEGREES : 9.2
 MS : 1.088
 MAXIMUM
 PRESSURE: 76.7
 RATE : 6.9
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 222

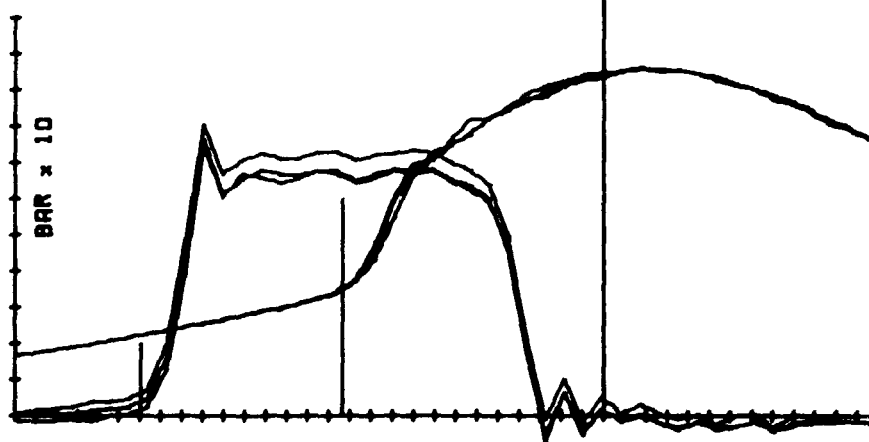


AVERAGE
 TORQUE : 152
 R.P.M. : 1434
 START OF
 INJN. : 22
 COMON. : 12.4
 DELAY
 DEGREES : 9.6
 MS : 1.115
 MAXIMUM
 PRESSURE: 85.9
 RATE : 13.5
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 372

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2660	C.V. : 38.35
TEST ID. : UNID014	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP66	

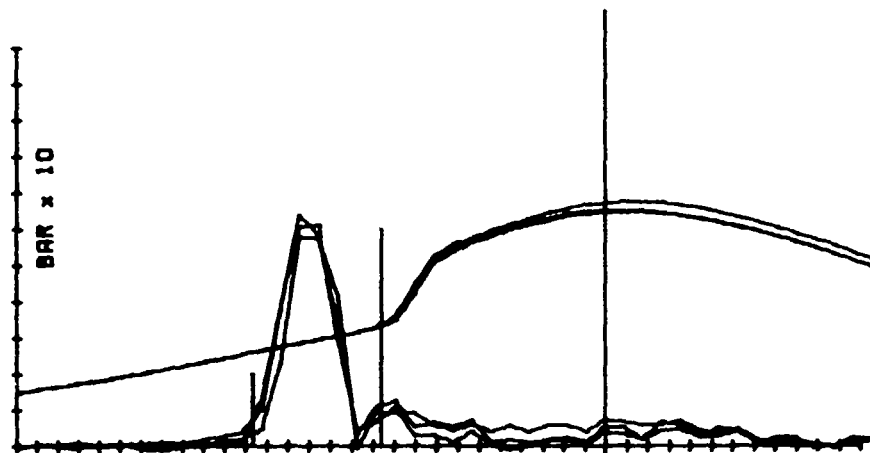

AVERAGE
 TORQUE : 34
 R.P.M. : 807
 START OF
 INJN. : 16.7
 COMBN. : 10.6
 DELAY
 DEGREES : 6.1
 ΔS : 1.284
 MAXIMUM
 PRESSURE: 66.5
 RATE : 8.5
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 131

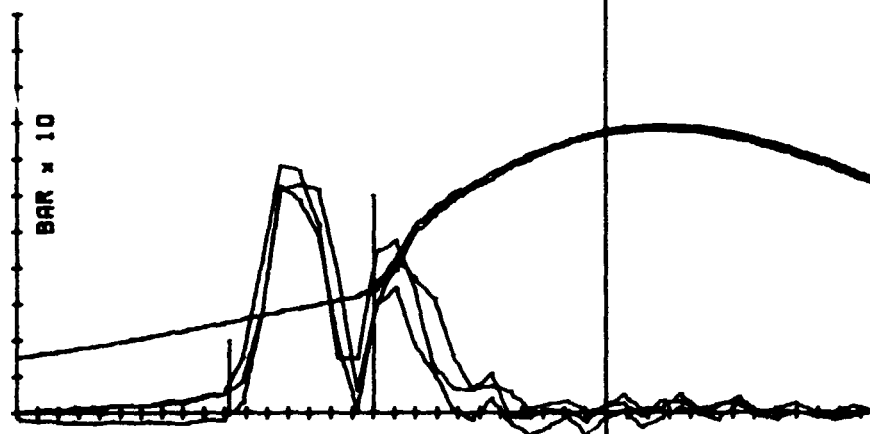


AVERAGE
 TORQUE : 68
 R.P.M. : 818
 START OF
 INJN. : 17.6
 COMBN. : 11
 DELAY
 DEGREES : 6.8
 ΔS : 1.39
 MAXIMUM
 PRESSURE: 78.9
 RATE : 9.4
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 192

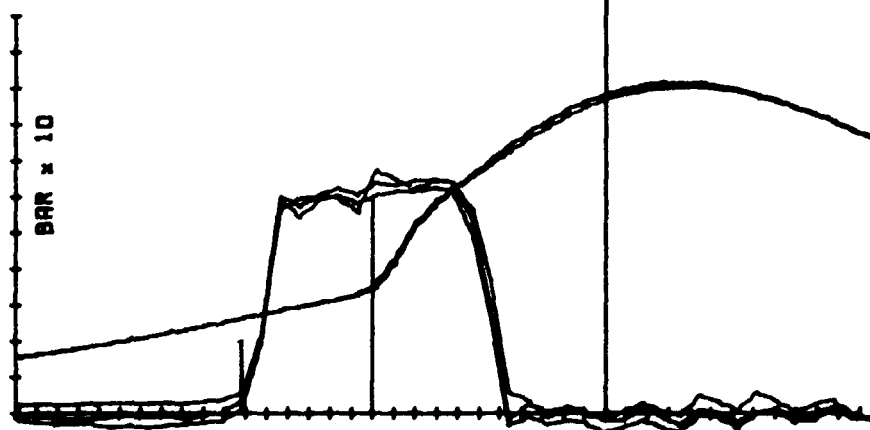

AVERAGE
 TORQUE : 149
 R.P.M. : 833
 START OF
 INJN. : 17.2
 COMBN. : 11
 DELAY
 DEGREES : 6.2
 ΔS : 1.243
 MAXIMUM
 PRESSURE: 90.8
 RATE : 9.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 305


DEGREES T. D. C.

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10014	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP67	

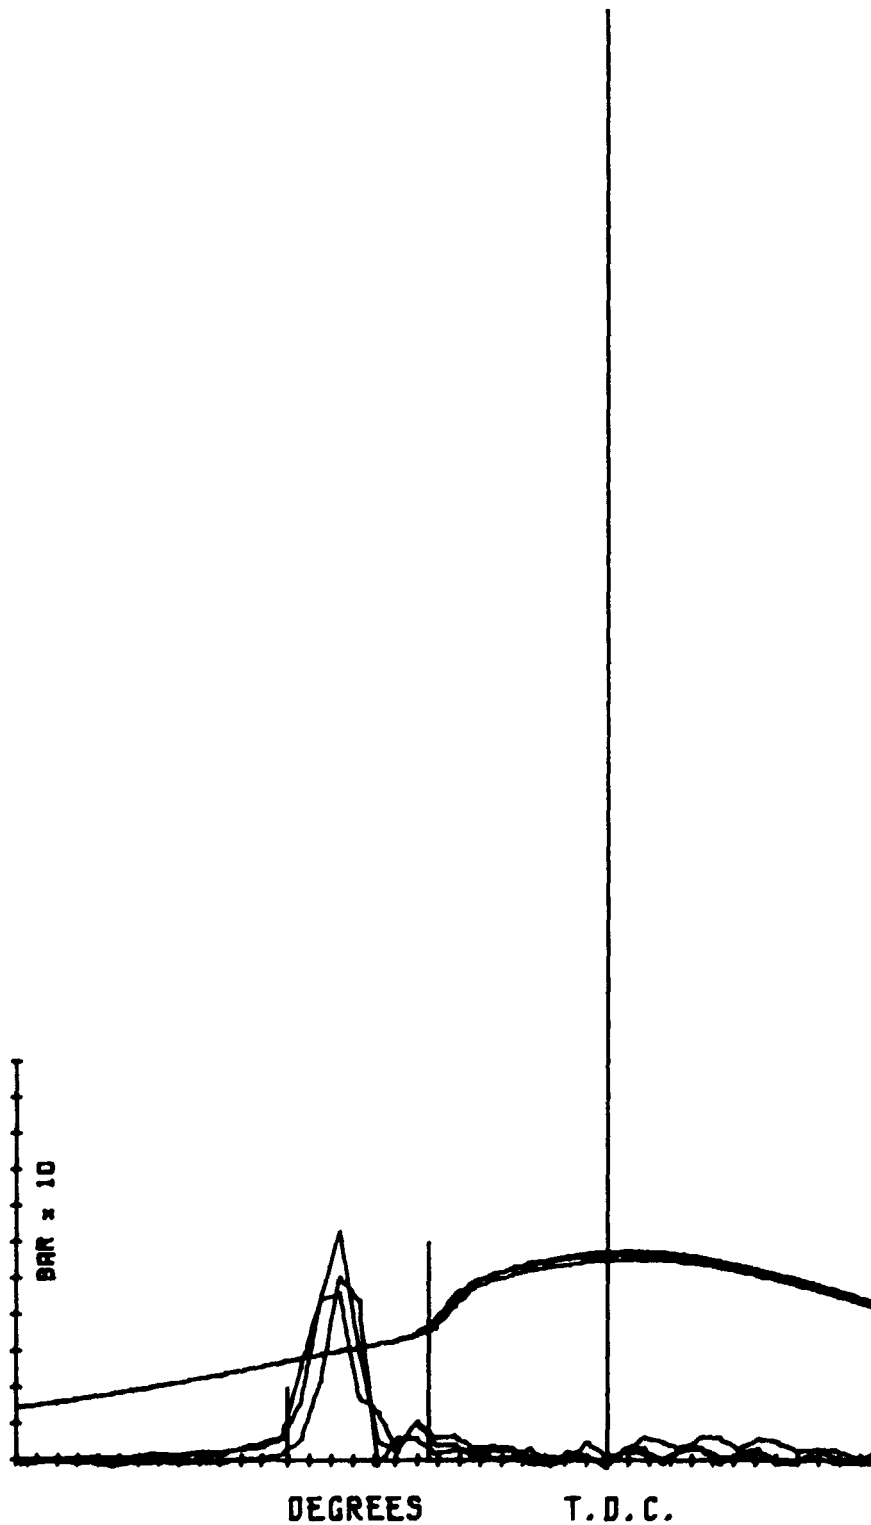

AVERAGE
 TORQUE : 3
 R.P.M. : 818
 START OF
 INJN. : 15.1
 COMB. : 8.5
 DELAY
 DEGREES : 8.8
 MS : 1.355
MAXIMUM
 PRESSURE: 58.1
 RATE : 8.4
TEMPERATURES
 AIR INLET: 27
 EXHAUST : 86

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UNID014	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP68	

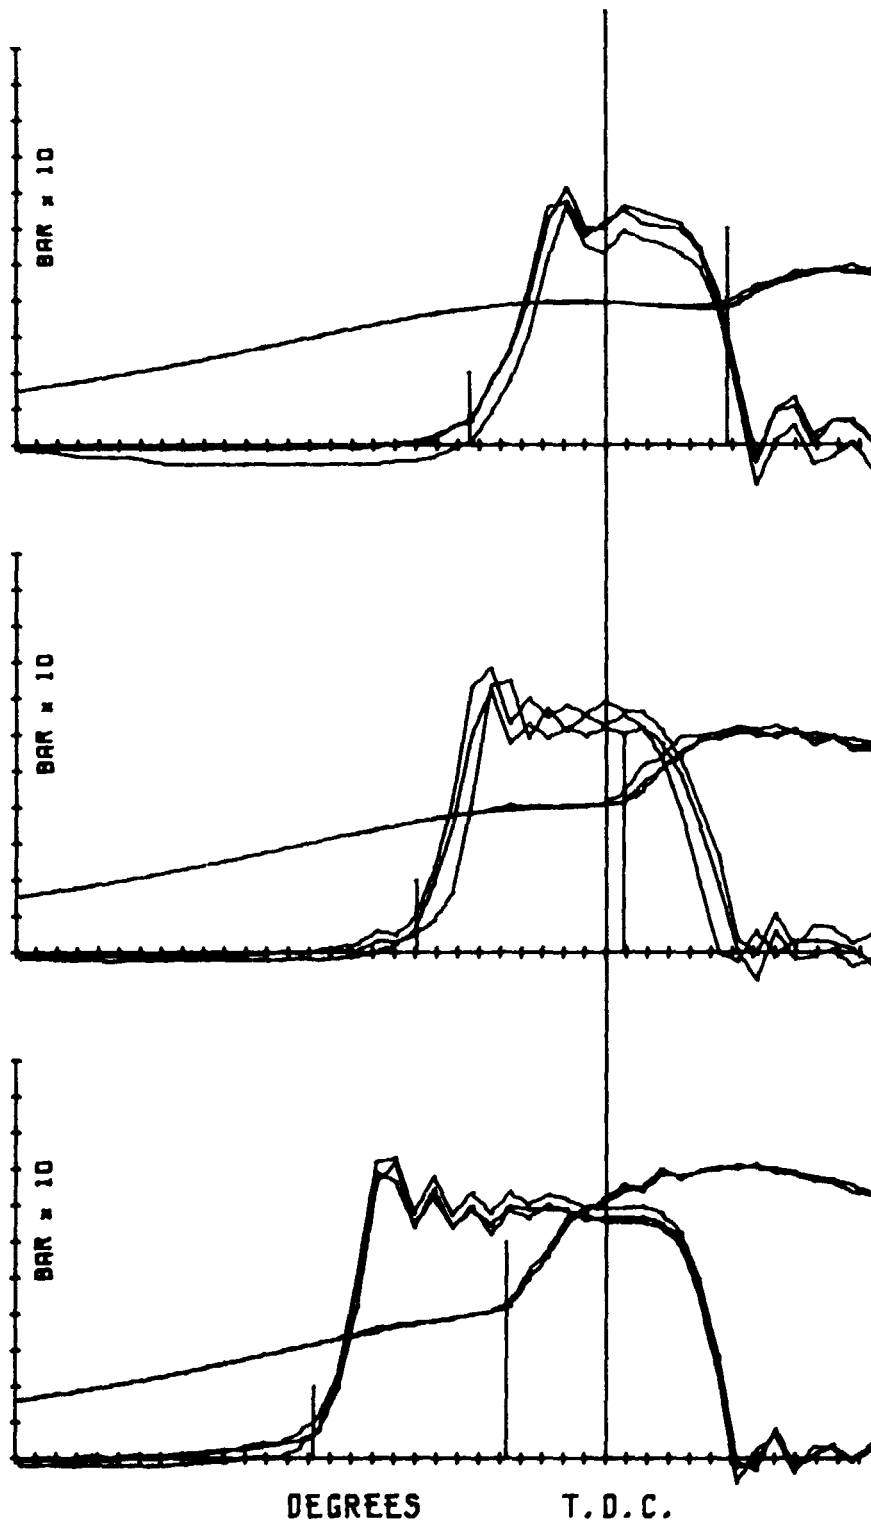


AVERAGE
 TORQUE : 33
 R.P.M. : 2044
 START OF
 INJN. : 6.4
 COMON. : -5.6
 DELAY
 DEGREES : 12.2
 MS : .995
 MAXIMUM
 PRESSURE: 46.7
 RATE : 3.3
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 190


AVERAGE
 TORQUE : 67
 R.P.M. : 2042
 START OF
 INJN. : 9
 COMON. : -.9
 DELAY
 DEGREES : 9.9
 MS : .803
 MAXIMUM
 PRESSURE: 61.3
 RATE : 5.9
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 277

AVERAGE
 TORQUE : 149
 R.P.M. : 2030
 START OF
 INJN. : 13.6
 COMON. : 4.7
 DELAY
 DEGREES : 8.1
 MS : .75
 MAXIMUM
 PRESSURE: 61.5
 RATE : 8.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 378


ENGINE : FORD 3000	FUEL ID : TEGON3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10013	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP69	

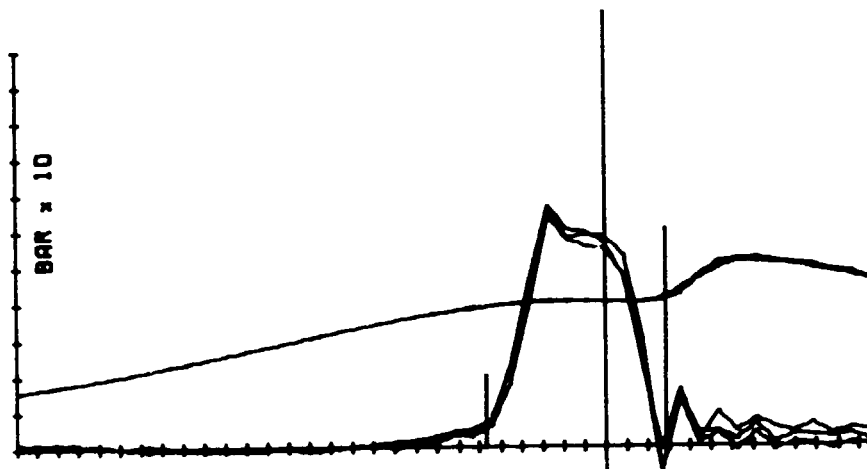

AVERAGE
 TORQUE : 34
 R.P.M. : 1432
 START OF
 INJN. : 5.8
 COMON. : -2.9
 DELAY
 DEGREES : 6.5
 MS : .881
 MAXIMUM
 PRESSURE: 51.6
 RATE : 4.1
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 150

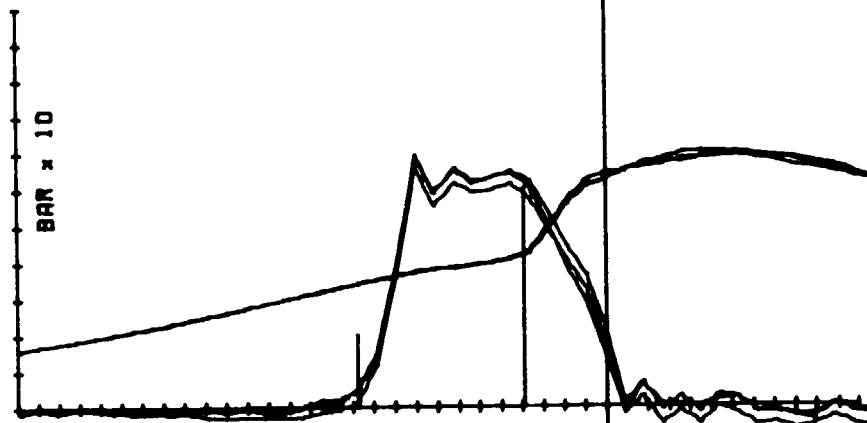


AVERAGE
 TORQUE : 92
 R.P.M. : 1440
 START OF
 INJN. : 11.8
 COMON. : 3.9
 DELAY
 DEGREES : 7.9
 MS : .915
 MAXIMUM
 PRESSURE: 69.8
 RATE : 7.5
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 229

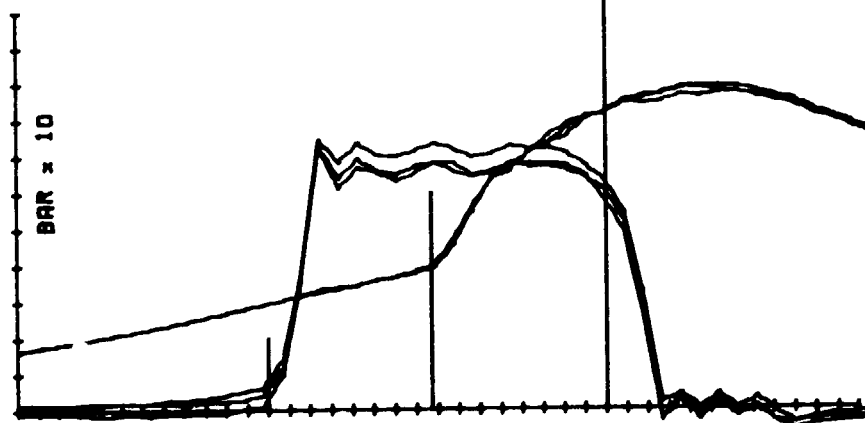


AVERAGE
 TORQUE : 159
 R.P.M. : 1448
 START OF
 INJN. : 18
 COMON. : 6.2
 DELAY
 DEGREES : 7.6
 MS : .895
 MAXIMUM
 PRESSURE: 66.8
 RATE : 8.7
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 376

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2660	C.V. : 38.35
TEST ID. : UNID013	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP70	

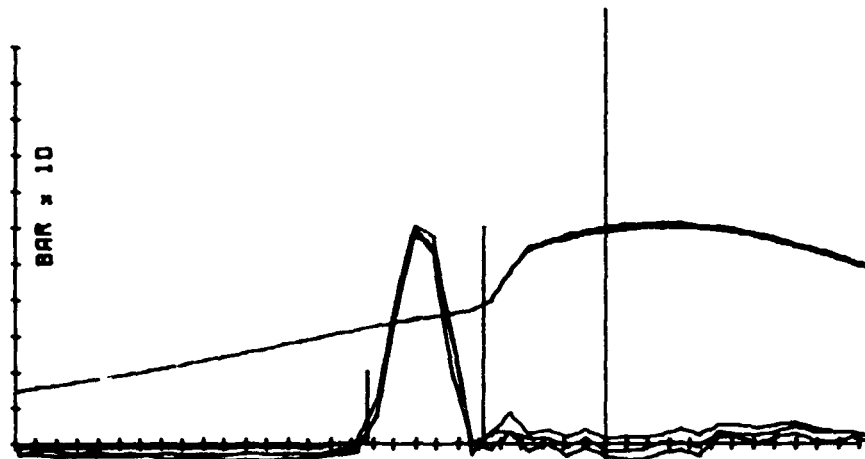

AVERAGE
 TORQUE : 38
 R.P.M. : 822
 START OF
 INJN. : 11.3
 COMBN. : 5.8
 DELAY
 DEGREES : 5.5
 μS : 1.122
 MAXIMUM
 PRESSURE: 60.8
 RATE : 6.3
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 126

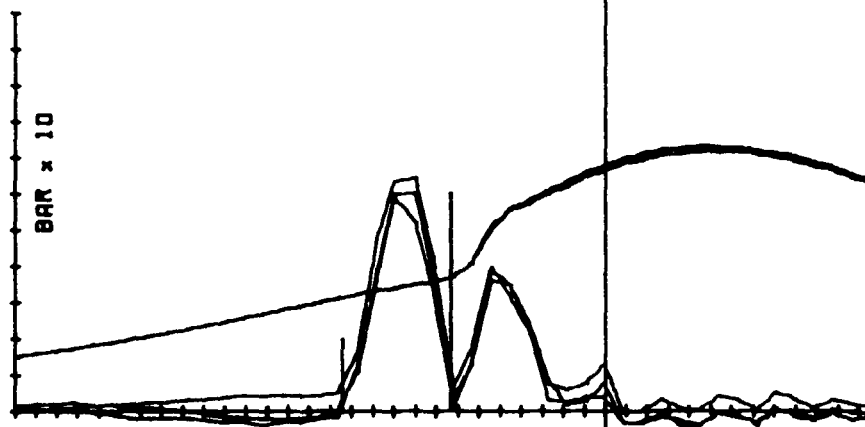

AVERAGE
 TORQUE : 93
 R.P.M. : 812
 START OF
 INJN. : 12.4
 COMBN. : 7.3
 DELAY
 DEGREES : 5.1
 μS : 1.04
 MAXIMUM
 PRESSURE: 72.8
 RATE : 9.5
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 197



AVERAGE
 TORQUE : 154
 R.P.M. : 823
 START OF
 INJN. : 11.8
 COMBN. : 8.8
 DELAY
 DEGREES : 4.9
 μS : 1.009
 MAXIMUM
 PRESSURE: 82.6
 RATE : 7.2
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 312


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10013	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP71	




AVERAGE
 TORQUE : 3
 R.P.M. : 623
 START OF
 INJN. : 8.7
 COMMON. : 4
 DELAY
 DEGREES : 5.7
 MS : 1.152
 MAXIMUM
 PRESSURE: 52.1
 RATE : 5.2
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 87


ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2660	C.V. : 38.35
TEST ID. : UN10013	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP72	

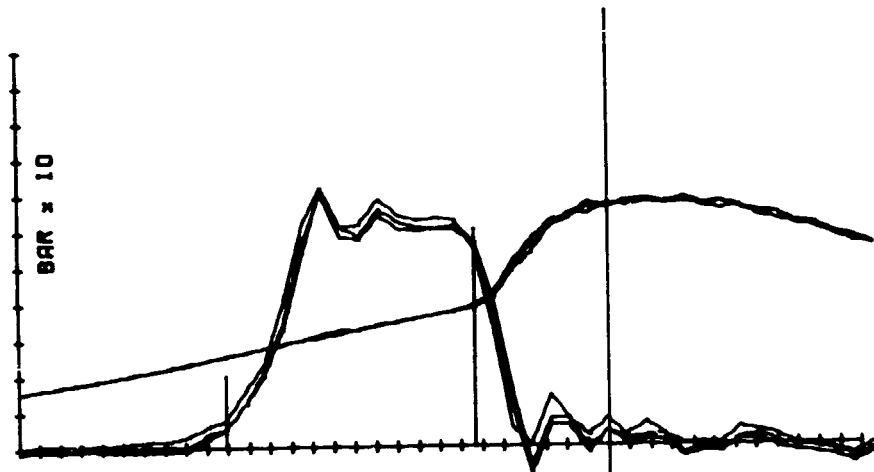

AVERAGE
 TORQUE : 38
 R.P.M. : 2038
 START OF
 INJN. : 18.1
 COMBN. : 6.3
 DELAY
 DEGREES : 11.8
 MS : .963
 MAXIMUM
 PRESSURE: 87.9
 RATE : 7.8
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 187

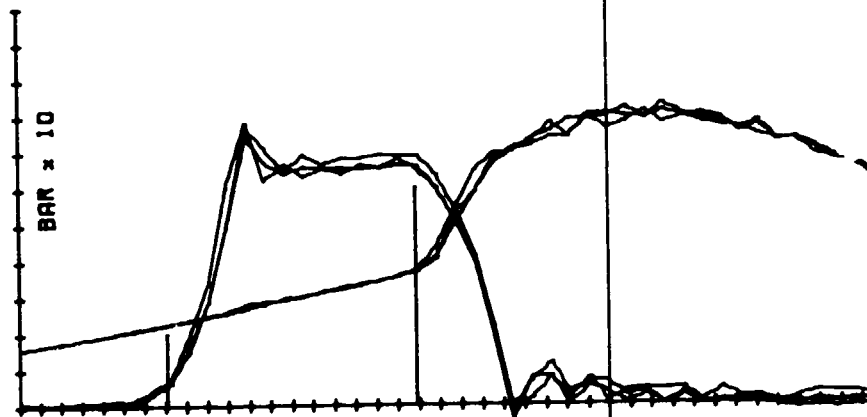


AVERAGE
 TORQUE : 91
 R.P.M. : 2032
 START OF
 INJN. : 21
 COMBN. : 9.1
 DELAY
 DEGREES : 11.9
 MS : .972
 MAXIMUM
 PRESSURE: 82.2
 RATE : 11.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 271

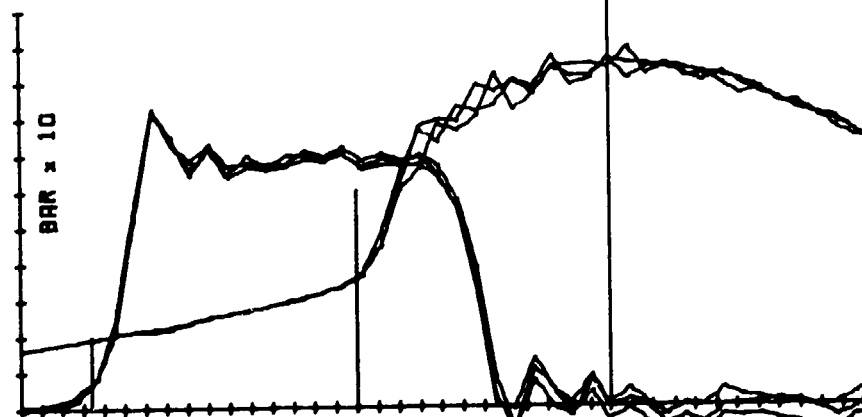


AVERAGE
 TORQUE : 127
 R.P.M. : 2019
 START OF
 INJN. : 24.8
 COMBN. : 12
 DELAY
 DEGREES : 12.8
 MS : 1.042
 MAXIMUM
 PRESSURE: 87.4
 RATE : 17.4
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 377

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10015	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP73	

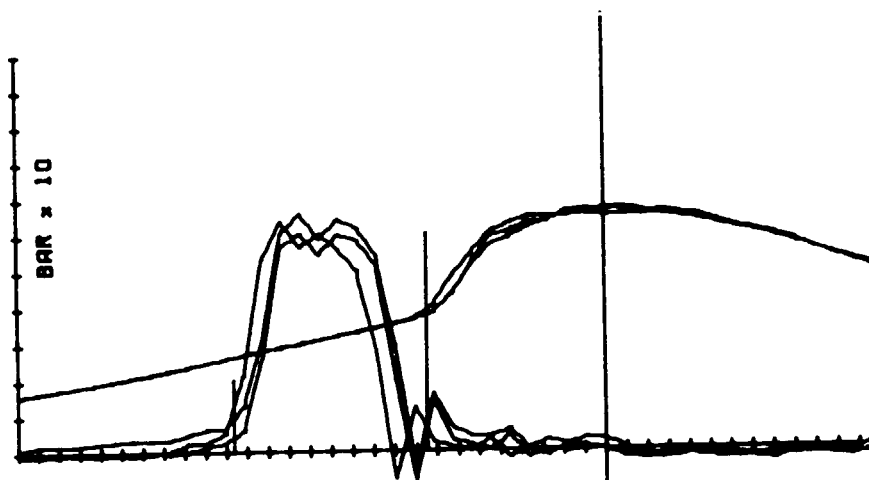

AVERAGE
 TORQUE : 37
 R.P.M. : 1441
 START OF
 INJN. : 17.8
 COMON. : 8.4
 DELAY
 DEGREES : 9.2
 ΔS : 1.064
 MAXIMUM
 PRESSURE: 85.8
 RATE : 8
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 150

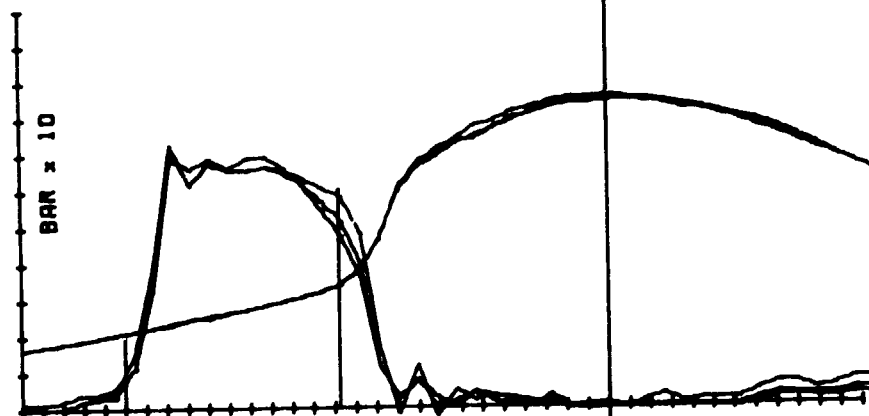


AVERAGE
 TORQUE : 91
 R.P.M. : 1428
 START OF
 INJN. : 23
 COMON. : 12.7
 DELAY
 DEGREES : 10.3
 ΔS : 1.202
 MAXIMUM
 PRESSURE: 85.4
 RATE : 13
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 232

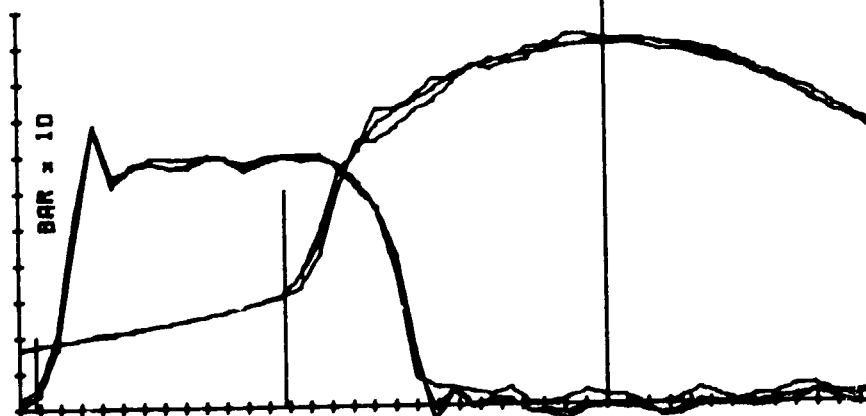


AVERAGE
 TORQUE : 142
 R.P.M. : 1447
 START OF
 INJN. : 27.2
 COMON. : 15.2
 DELAY
 DEGREES : 12
 ΔS : 1.378
 MAXIMUM
 PRESSURE: 101.7
 RATE : 18.2
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 308

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : TEGON3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UN10015	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP74	

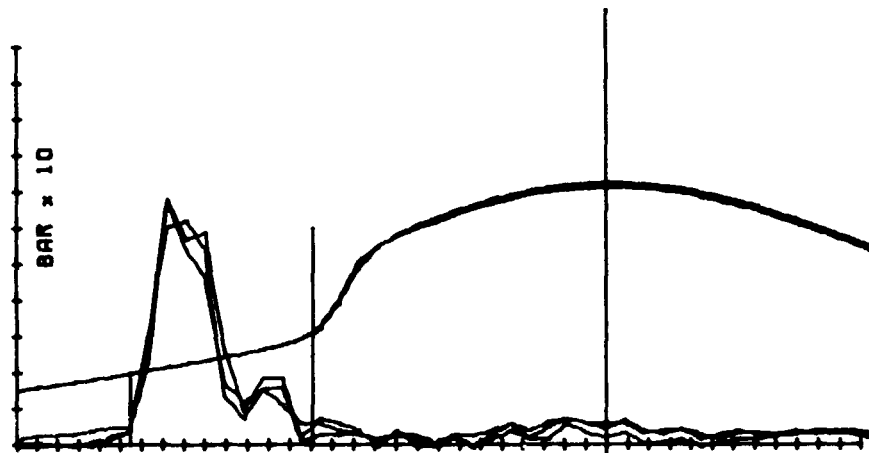

AVERAGE
 TORQUE : 38
 R.P.M. : 620
 START OF
 INJN. : 22.6
 COMON. : 13.9
 DELAY
 DEGREES : 6.7
 MS : 1.781
 MAXIMUM
 PRESSURE: 71.4
 RATE : 9.7
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 136

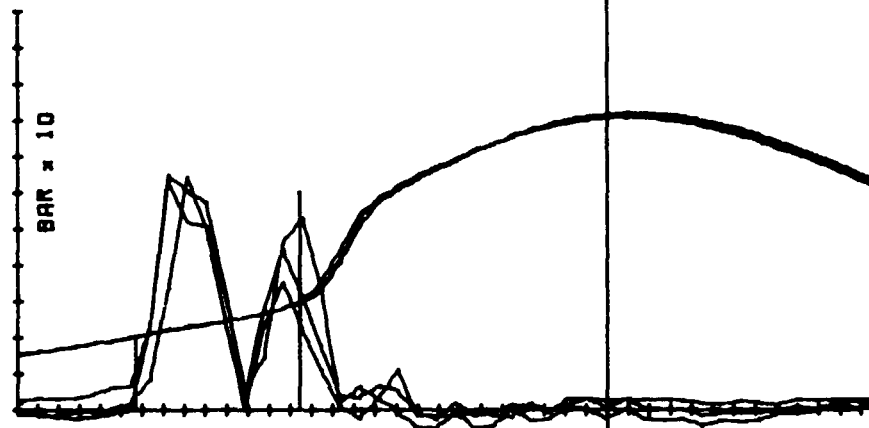


AVERAGE
 TORQUE : 66
 R.P.M. : 606
 START OF
 INJN. : 22.3
 COMON. : 14.6
 DELAY
 DEGREES : 7.7
 MS : 1.6
 MAXIMUM
 PRESSURE: 61.3
 RATE : 10
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 195

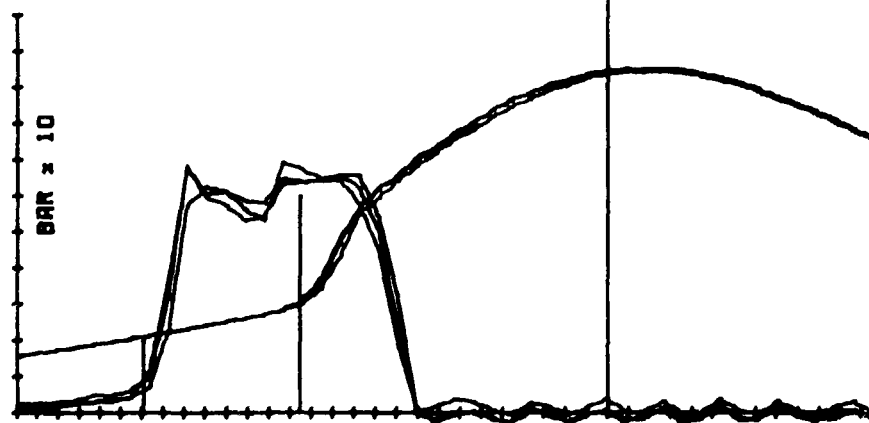

AVERAGE
 TORQUE : 145
 R.P.M. : 614
 START OF
 INJN. : 21.9
 COMON. : 14.6
 DELAY
 DEGREES : 7.3
 MS : 1.506
 MAXIMUM
 PRESSURE: 85
 RATE : 10.9
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 308


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UNID015	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP75	

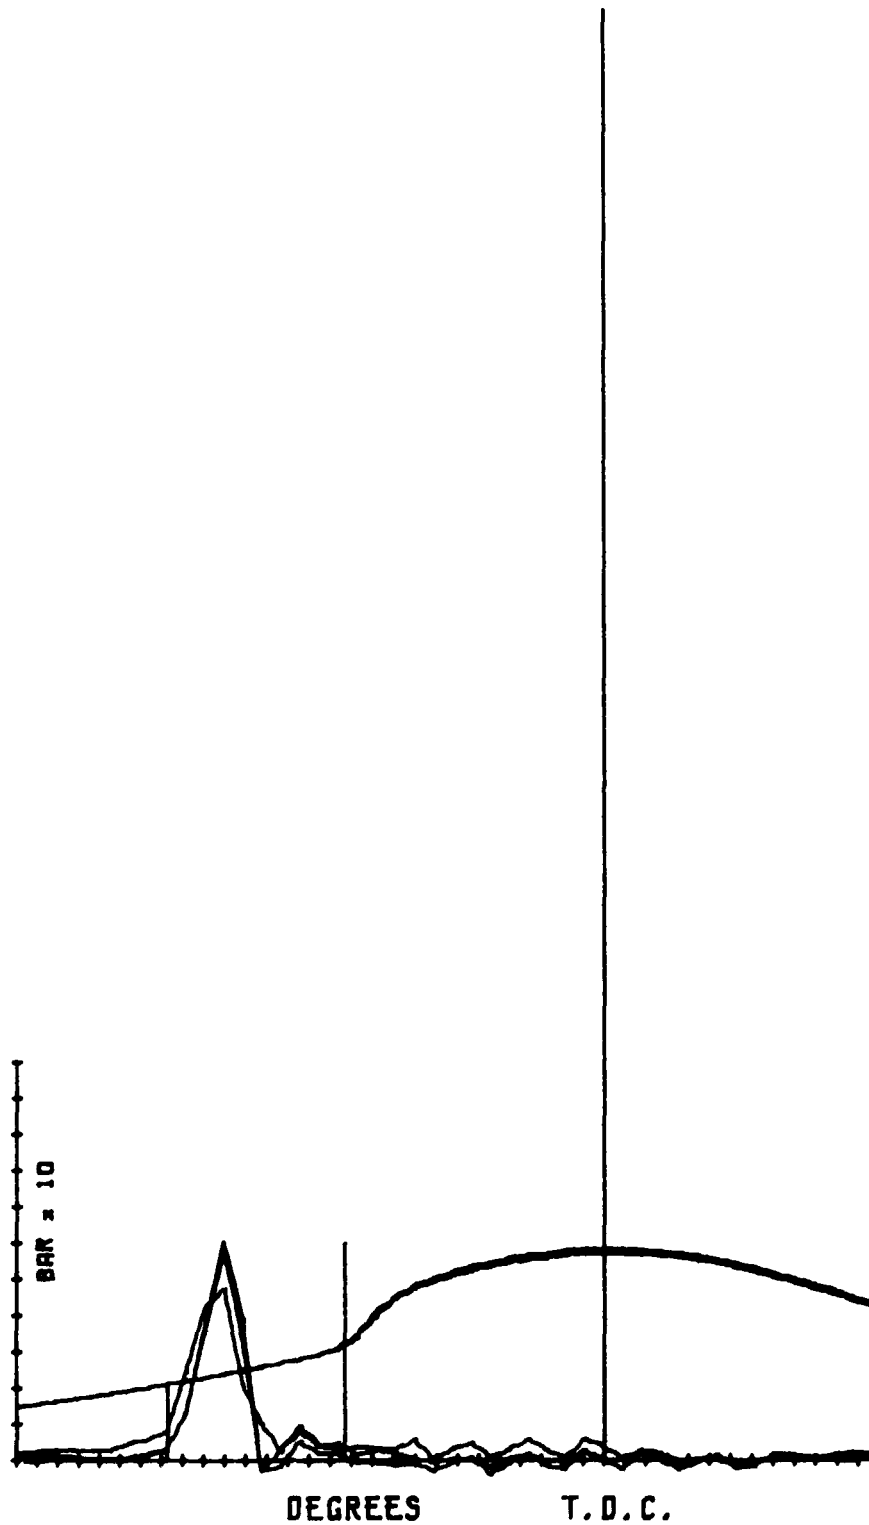


AVERAGE
 TORQUE : 3
 R.P.M. : 629
 START OF
 INJN. : 20.7
 COMB. : 12.3
 DELAY
 DEGREES : 6.4
 ΔS : 1.68
 MAXIMUM
 PRESSURE: 57.2
 RATE : 5.8
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 69

ENGINE : FORD 3000	FUEL ID : TEGDN3.9
CAPACITY : 2860	C.V. : 38.35
TEST ID. : UNID015	DENSITY : .648
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP76	

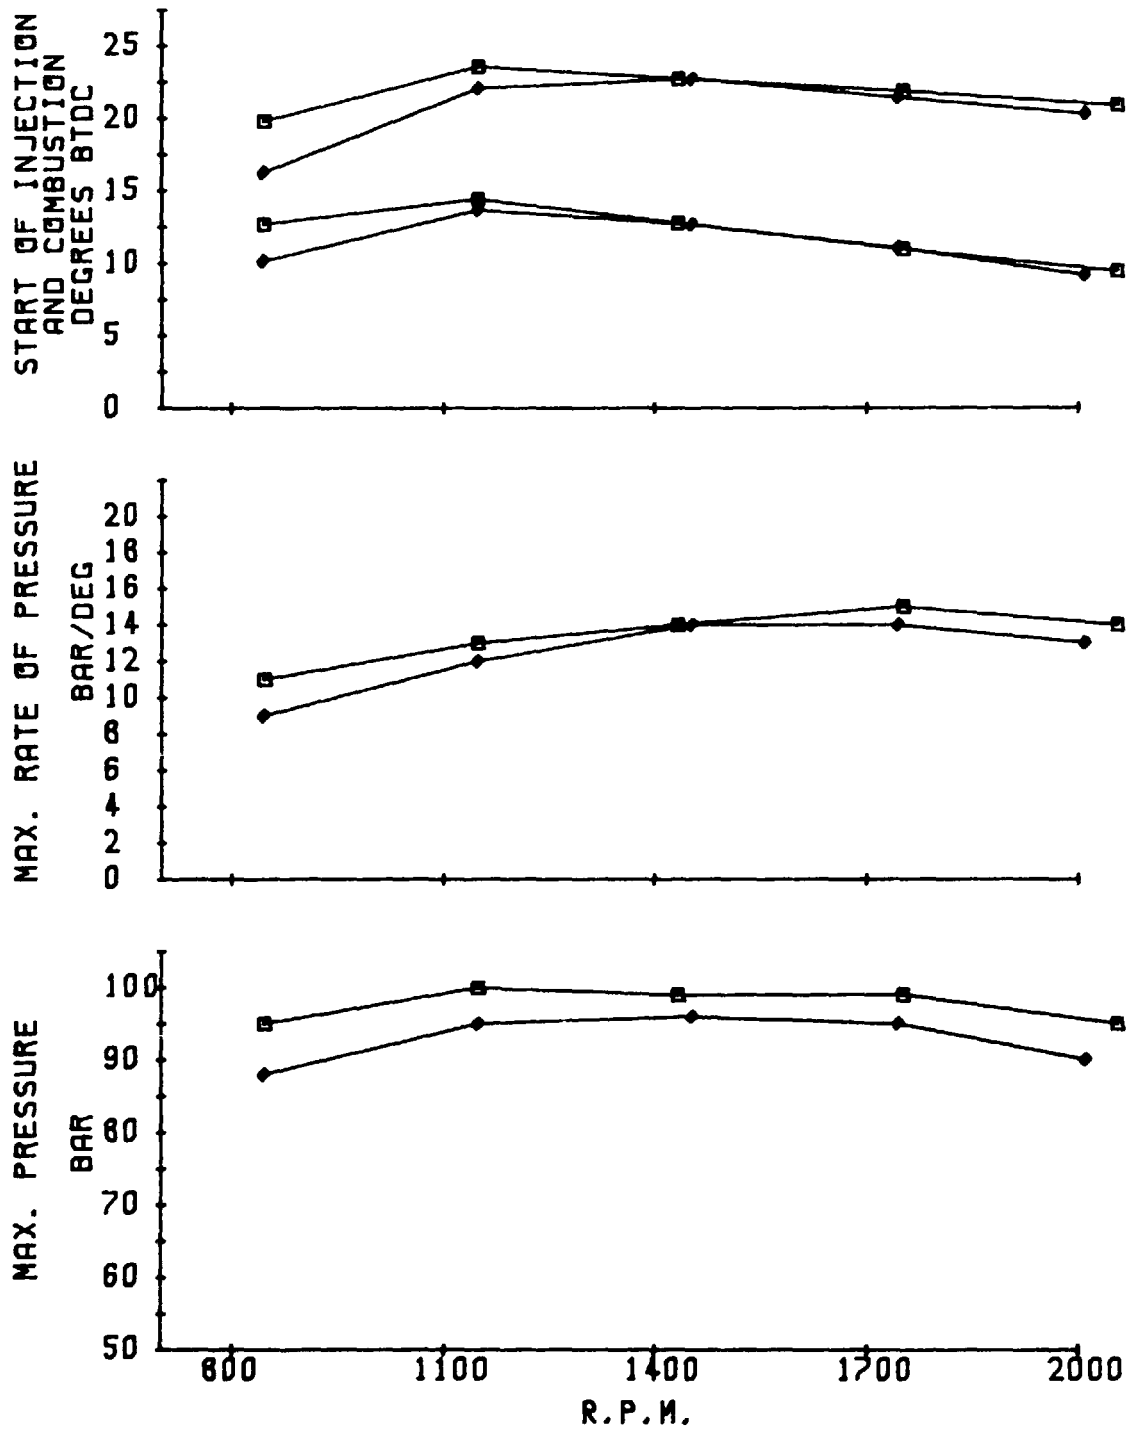

ENGINE : FORD 3000 CAPACITY: 2860	◆ 22/5/85 ■ 10/5/85
LONG TERM DIST 100 REPEATABILITY OF START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FULL LOAD FIG AP77

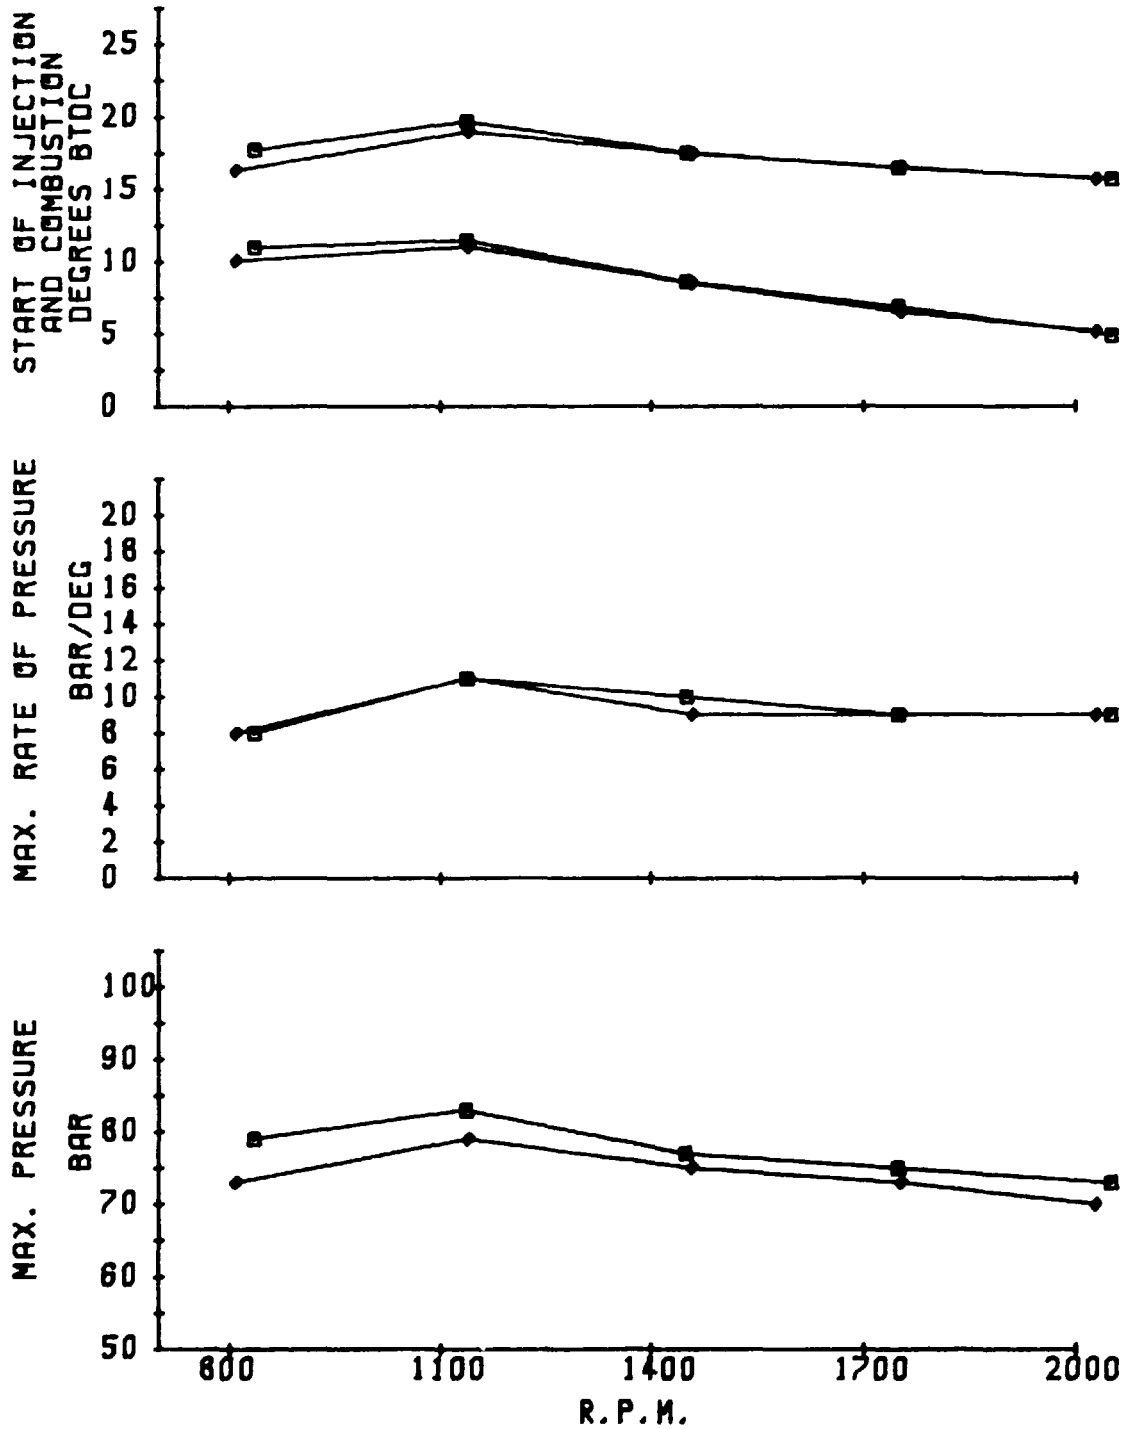


ENGINE : FORD 3000
CAPACITY: 2860

• 22/5/85
■ 10/5/85


LONG TERM DIST 100 REPEATABILITY OF
START OF: INJECTION, COMBUSTION,
MAX. PRESSURE & PRESSURE RATE

2/3 LOAD

FIG AP78

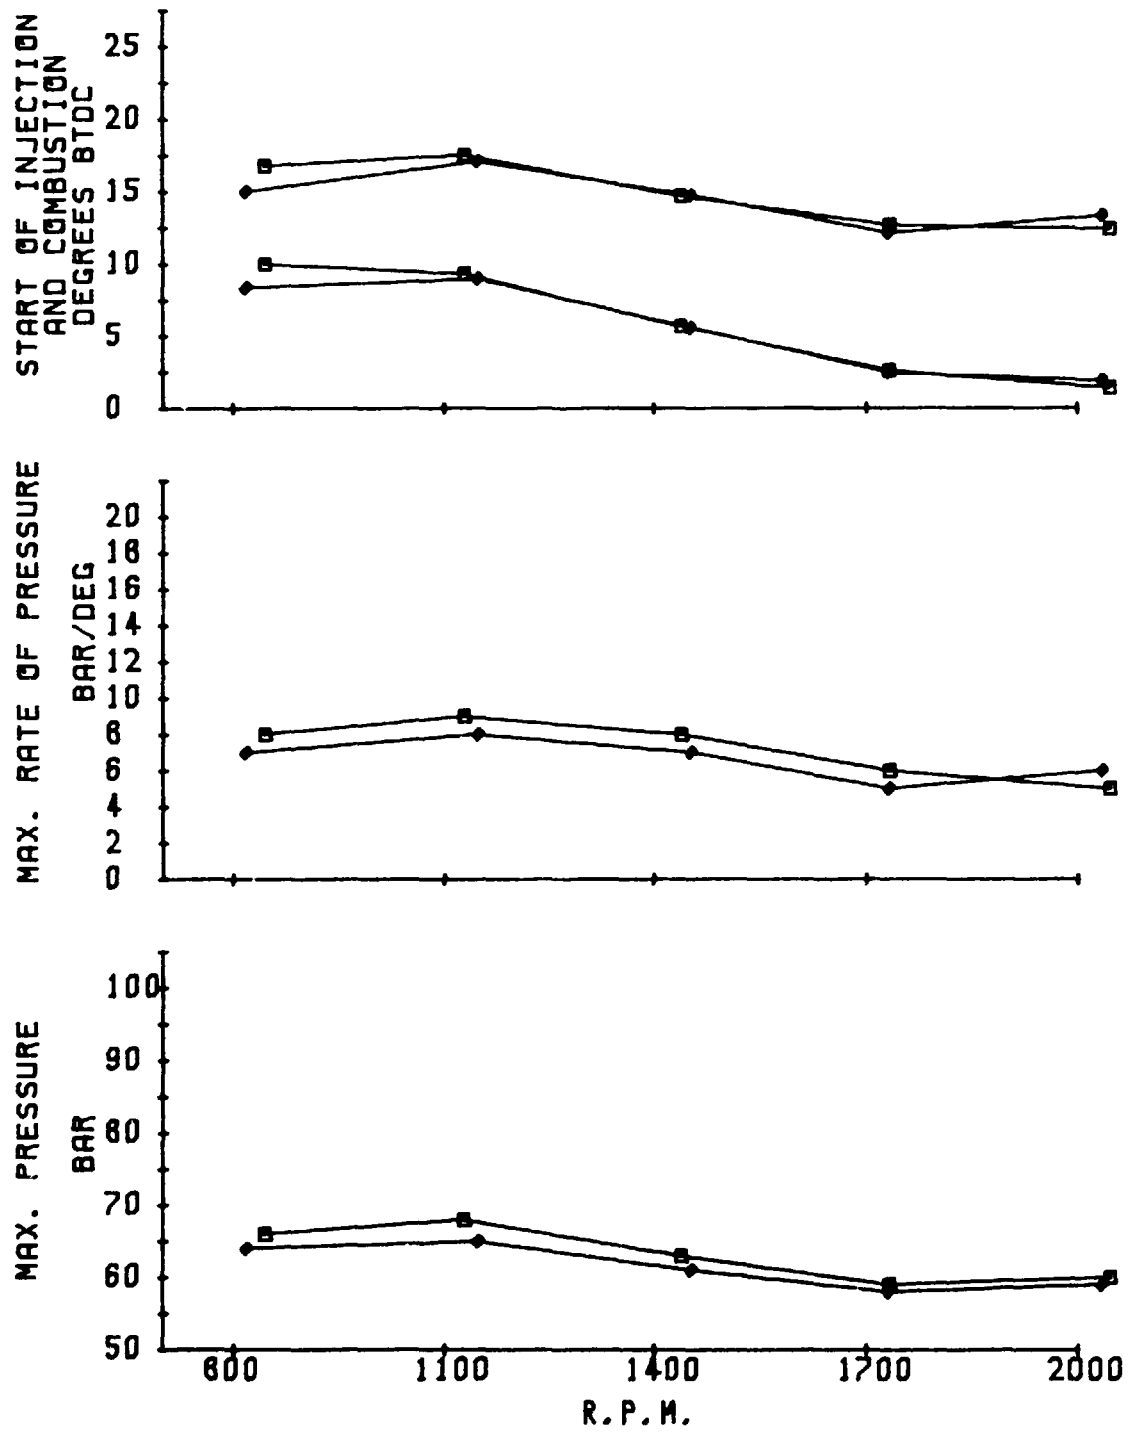

ENGINE : FORD 3000 CAPACITY: 2660	<ul style="list-style-type: none"> ◆ 22/5/85 ■ 10/5/85
LONG TERM DIST 100 REPEATABILITY OF START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	1/3 LOAD
	FIG AP79

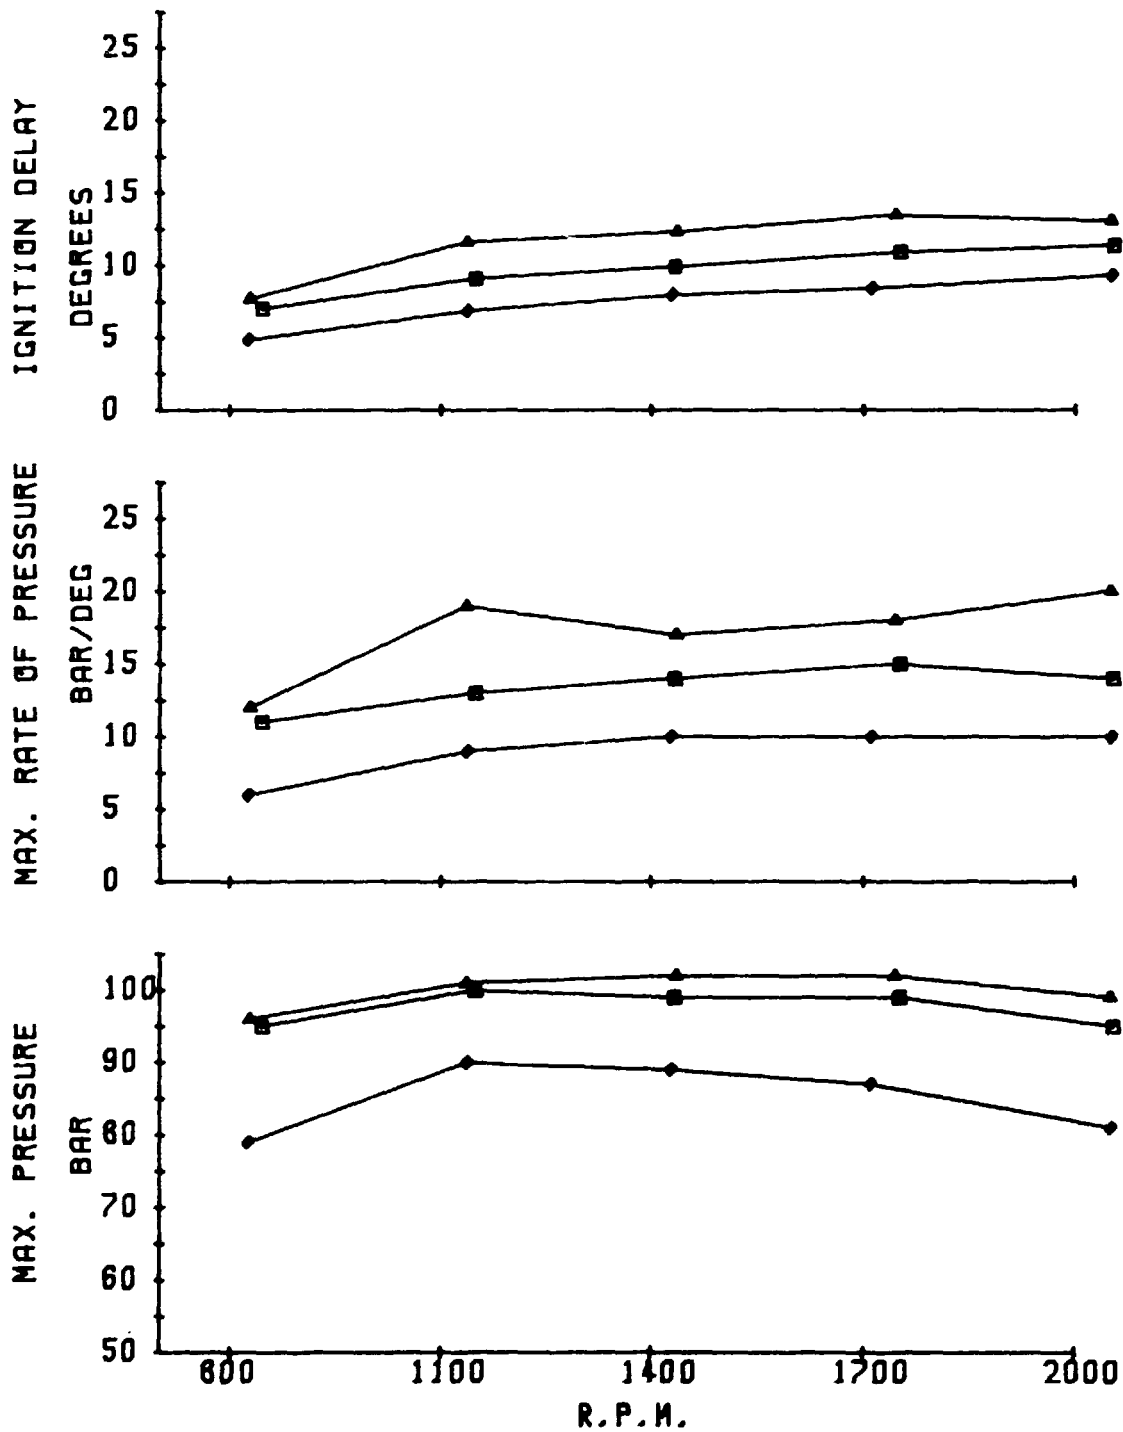


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
IGNITION DELAY,
MAX. PRESSURE & PRESSURE RATE

◆ 14 deg BTDC
■ 20 deg BTDC
▲ 26 deg BTDC
100 DIST
FULL LOAD

FIG AP80

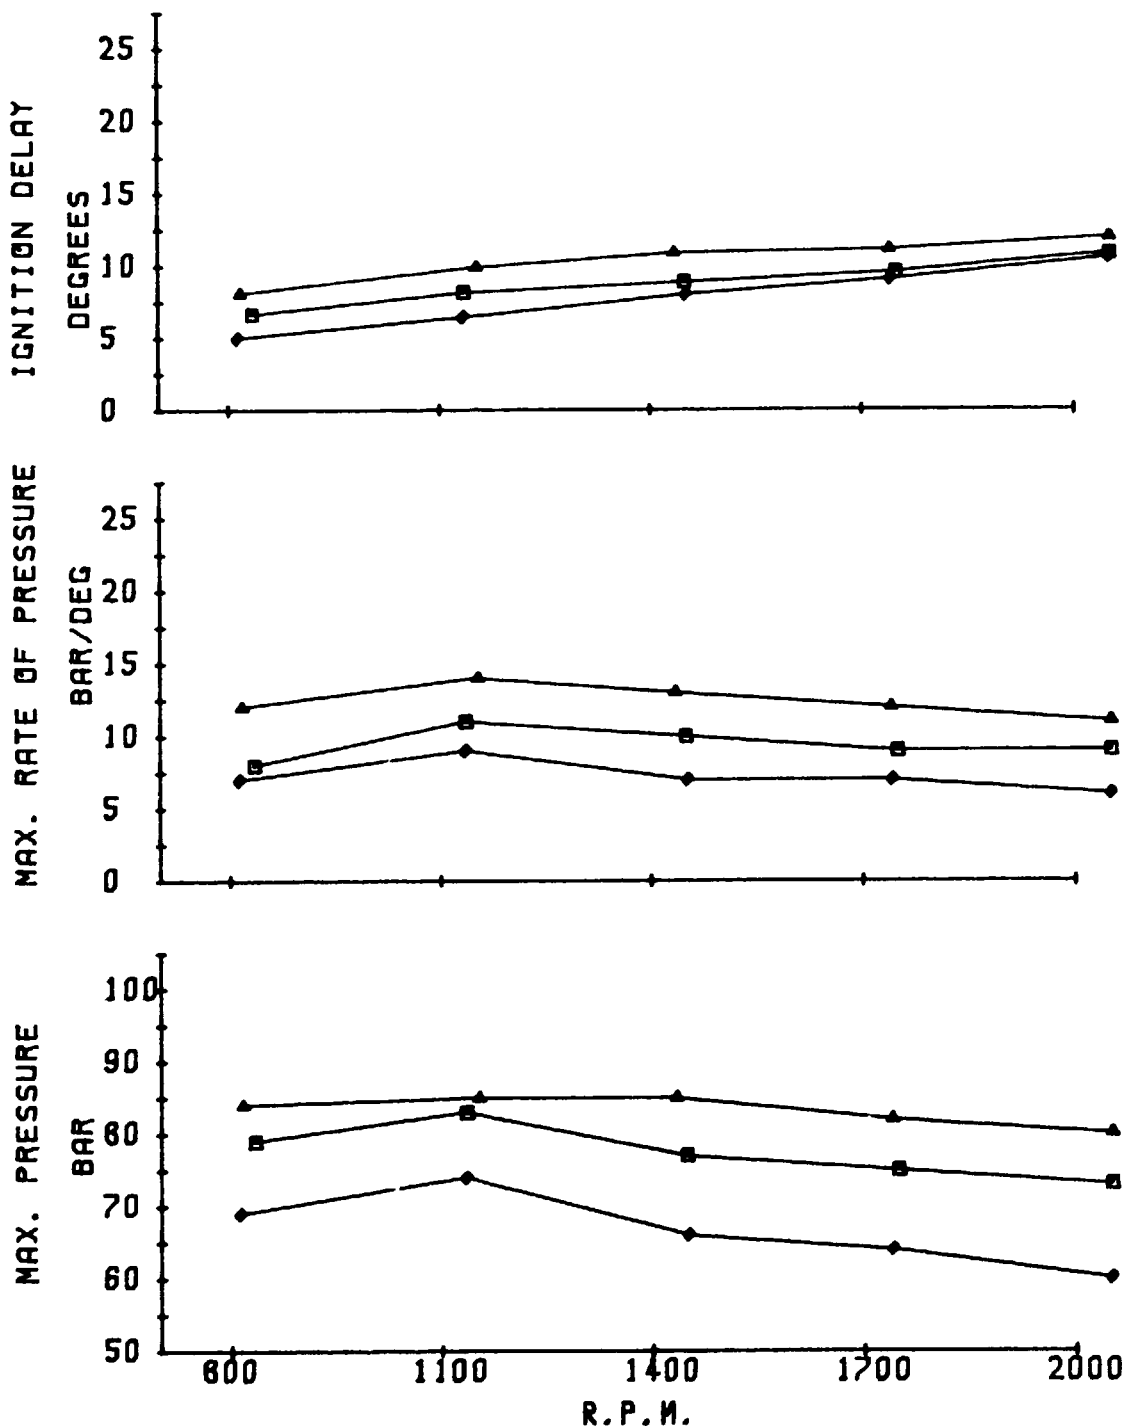

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	
100 DIST 2/3 LOAD FIG AP81	

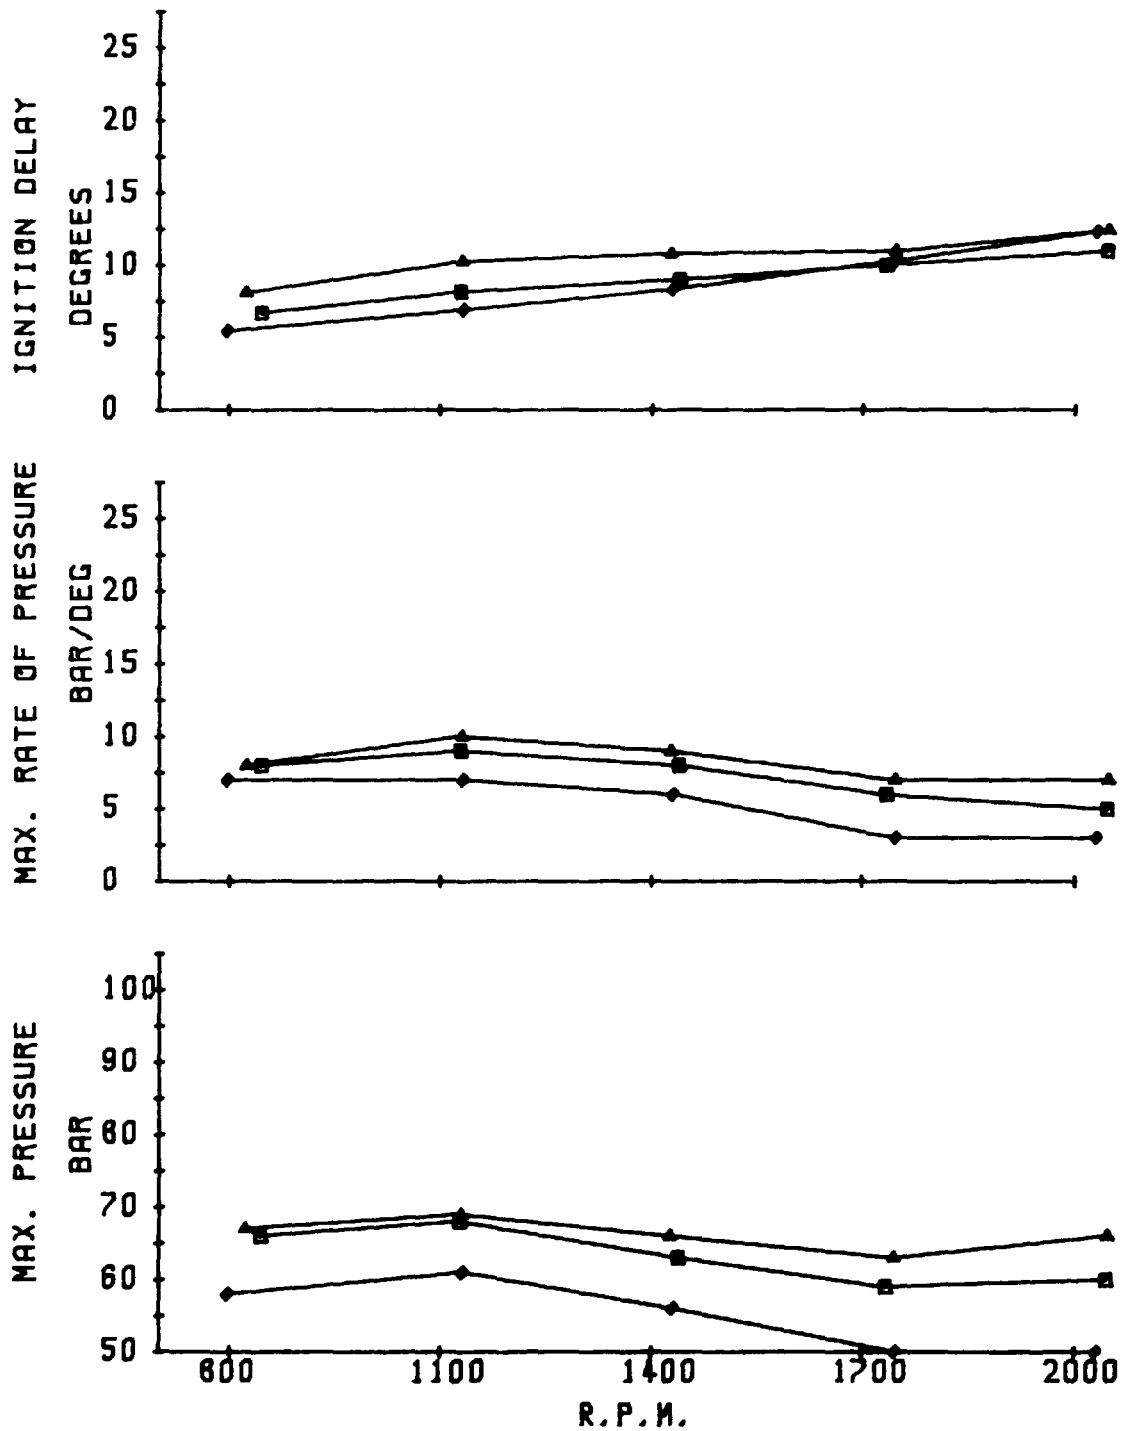


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
IGNITION DELAY,
MAX. PRESSURE & PRESSURE RATE

• 14 deg BTDC
■ 20 deg BTDC
▲ 26 deg BTDC
100 DIST
1/3 LOAD

FIG AP82

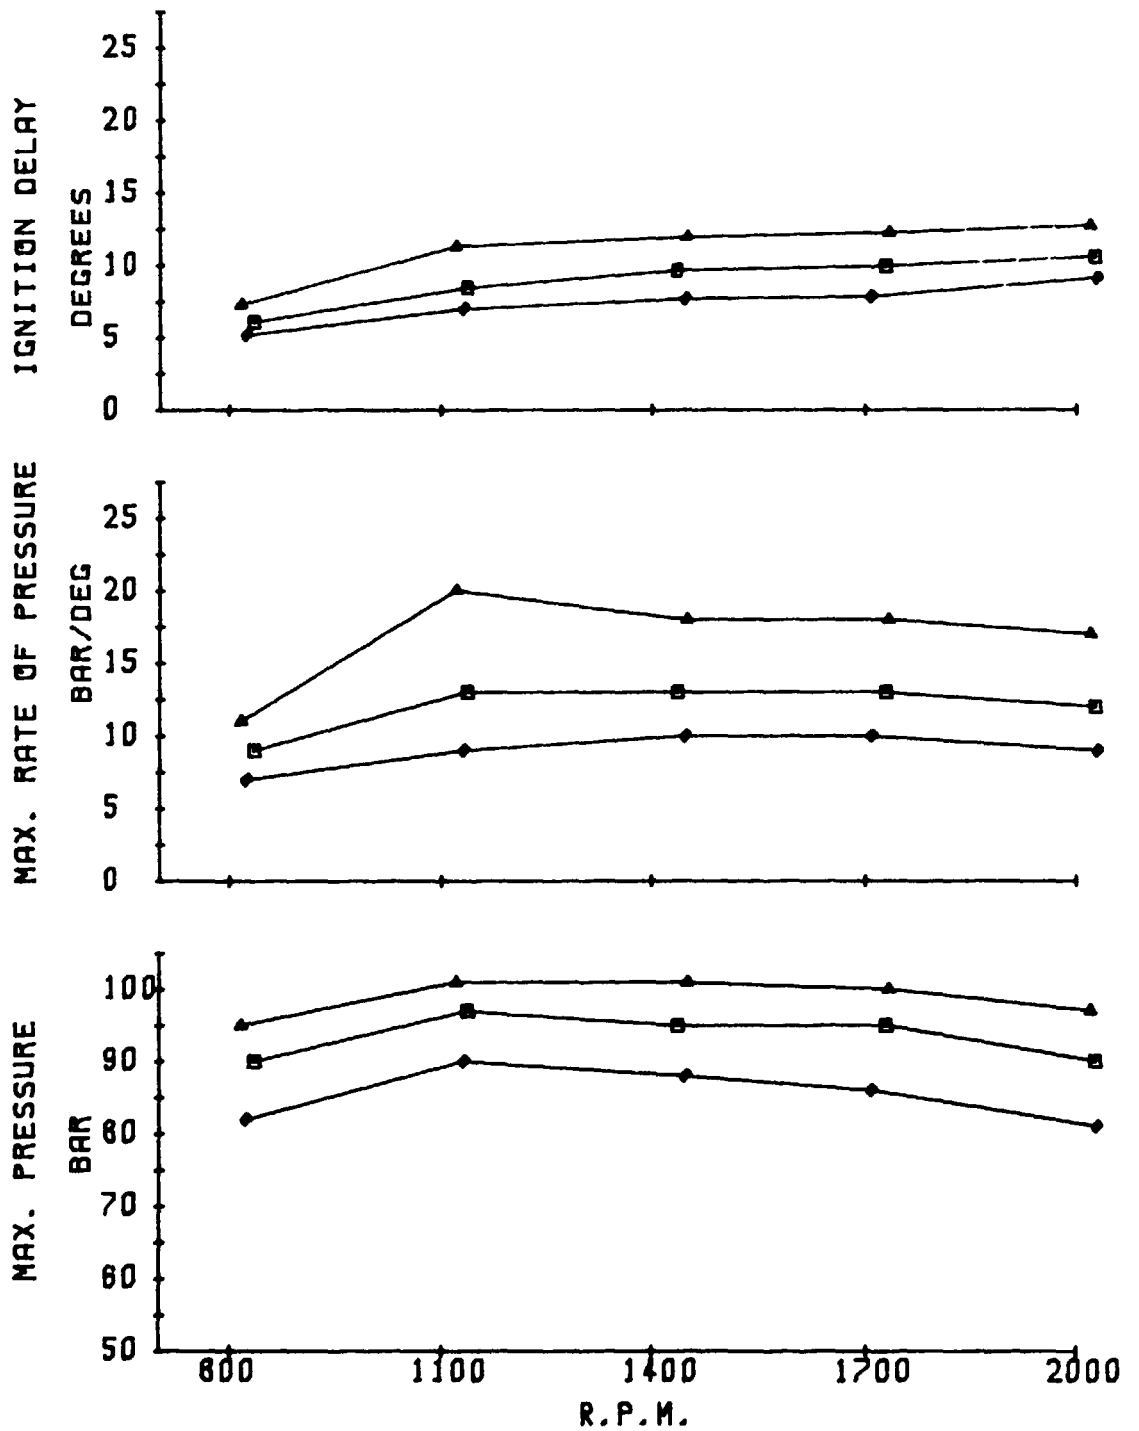

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	
TEGDN3.9 FULL LOAD FIG AP83	

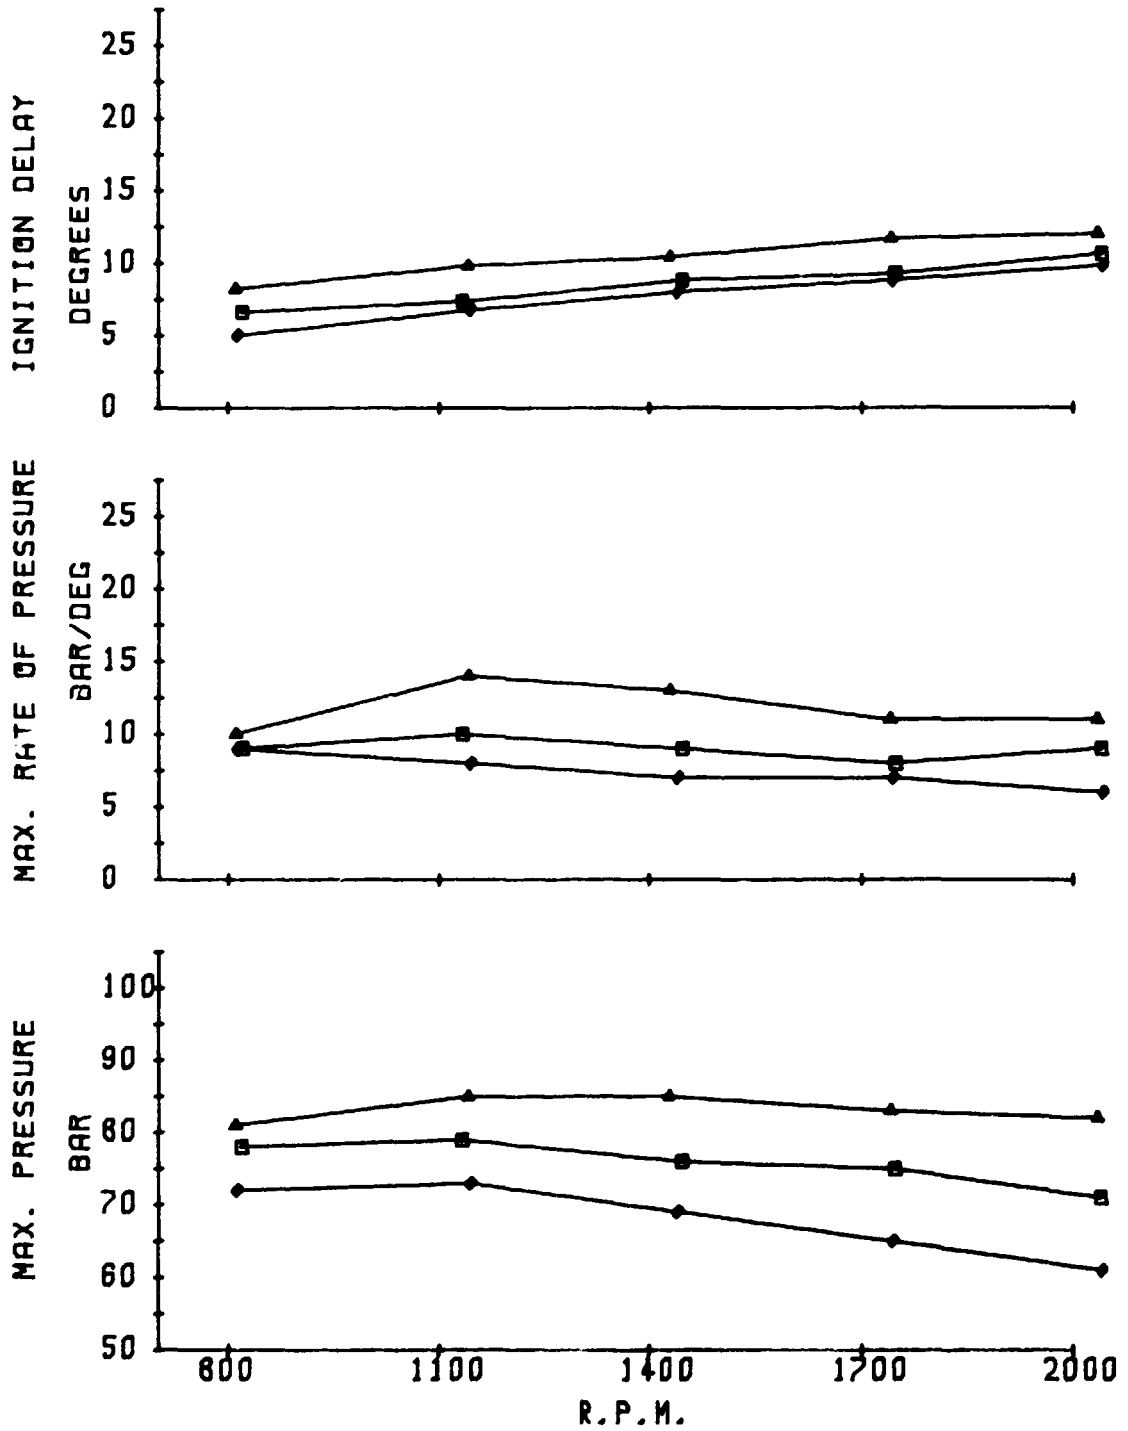


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
IGNITION DELAY,
MAX. PRESSURE & PRESSURE RATE

◆ 14 deg BTDC
■ 20 deg BTDC
▲ 26 deg BTDC
TEGDN3.9
2/3 LOAD


FIG AP84

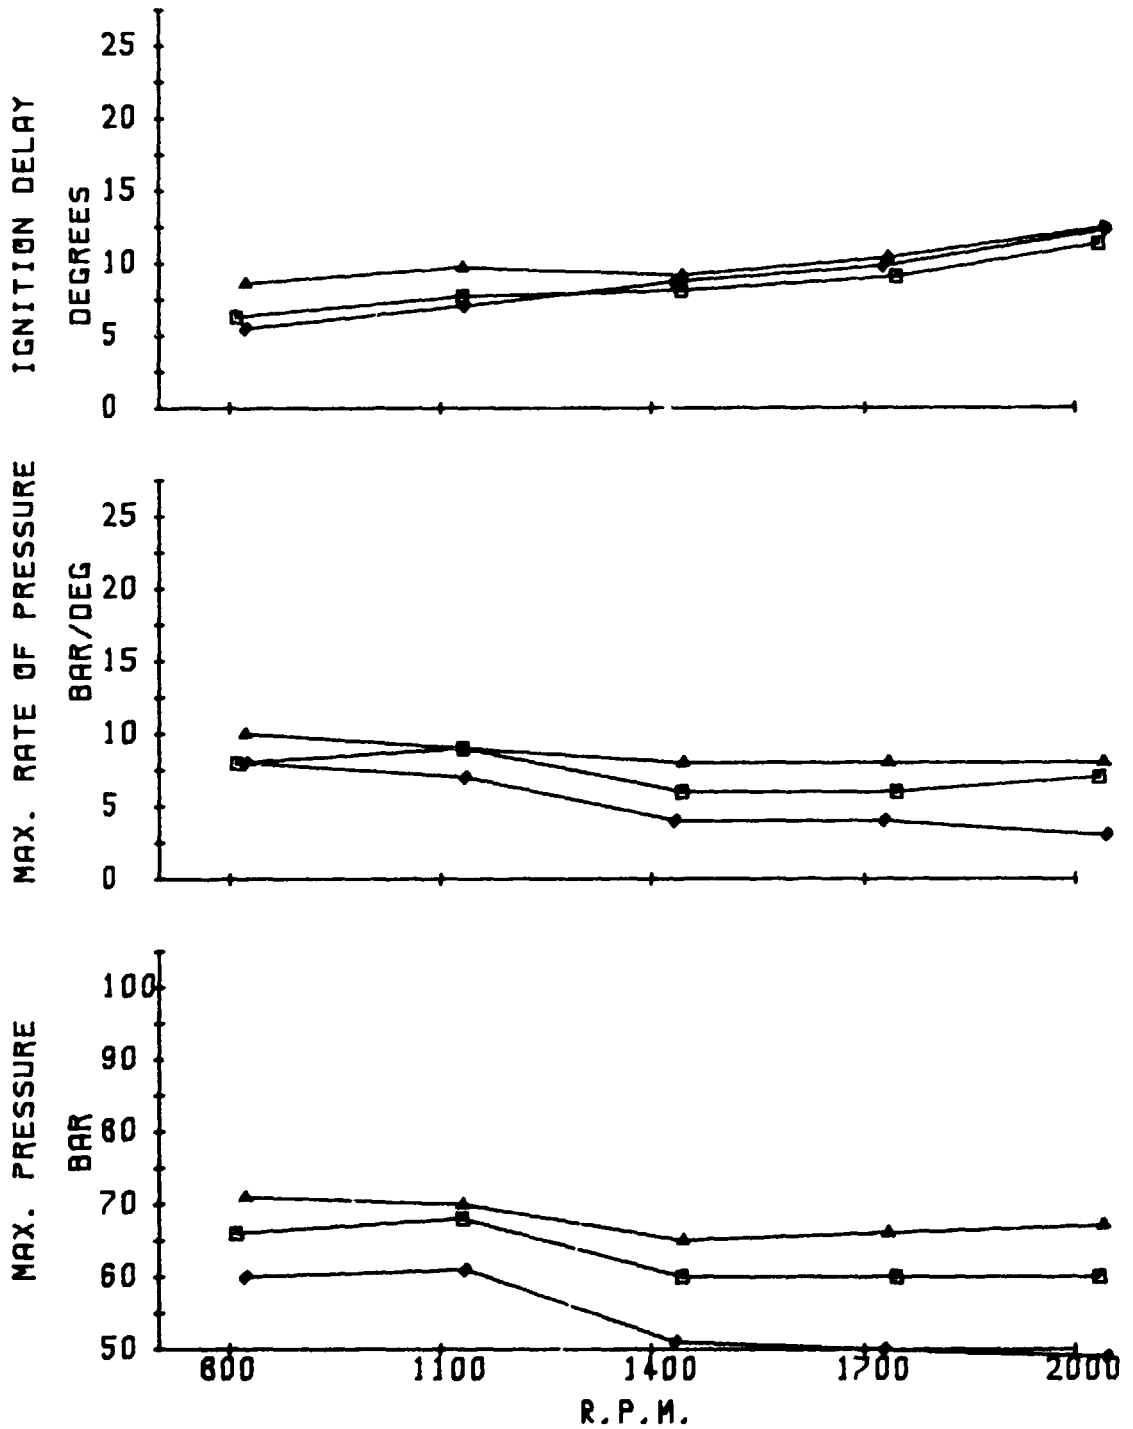




ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC TEGDN3.9 1/3 LOAD
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	
FIG AP85	

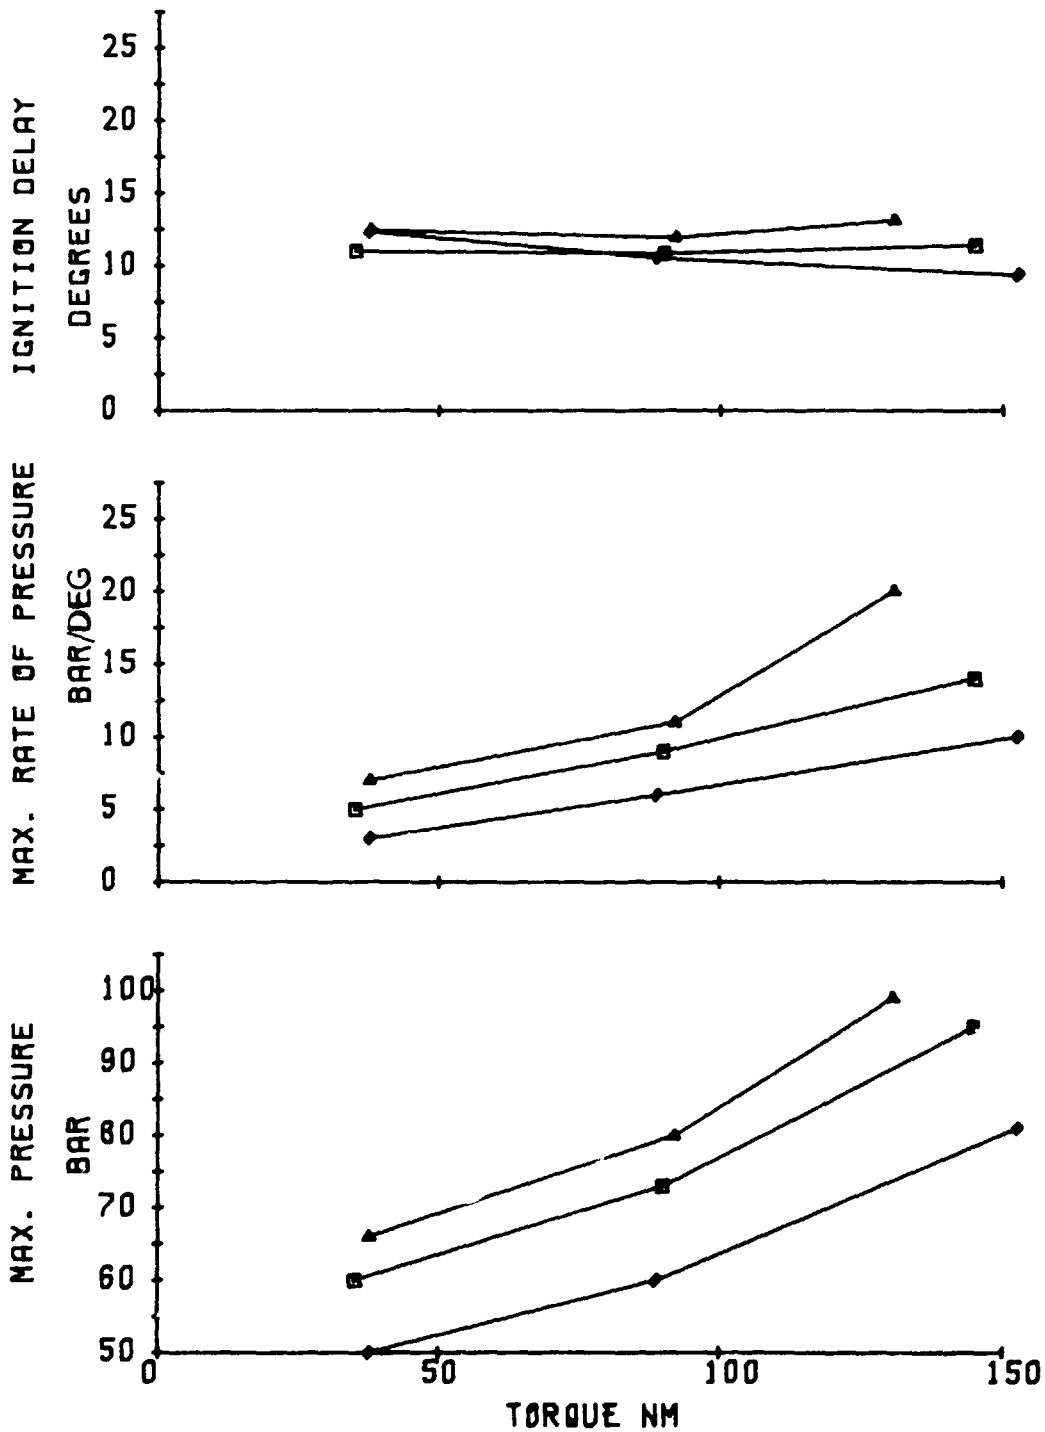


ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC DIST 100 2000 R.P.M.
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	FIG AP86

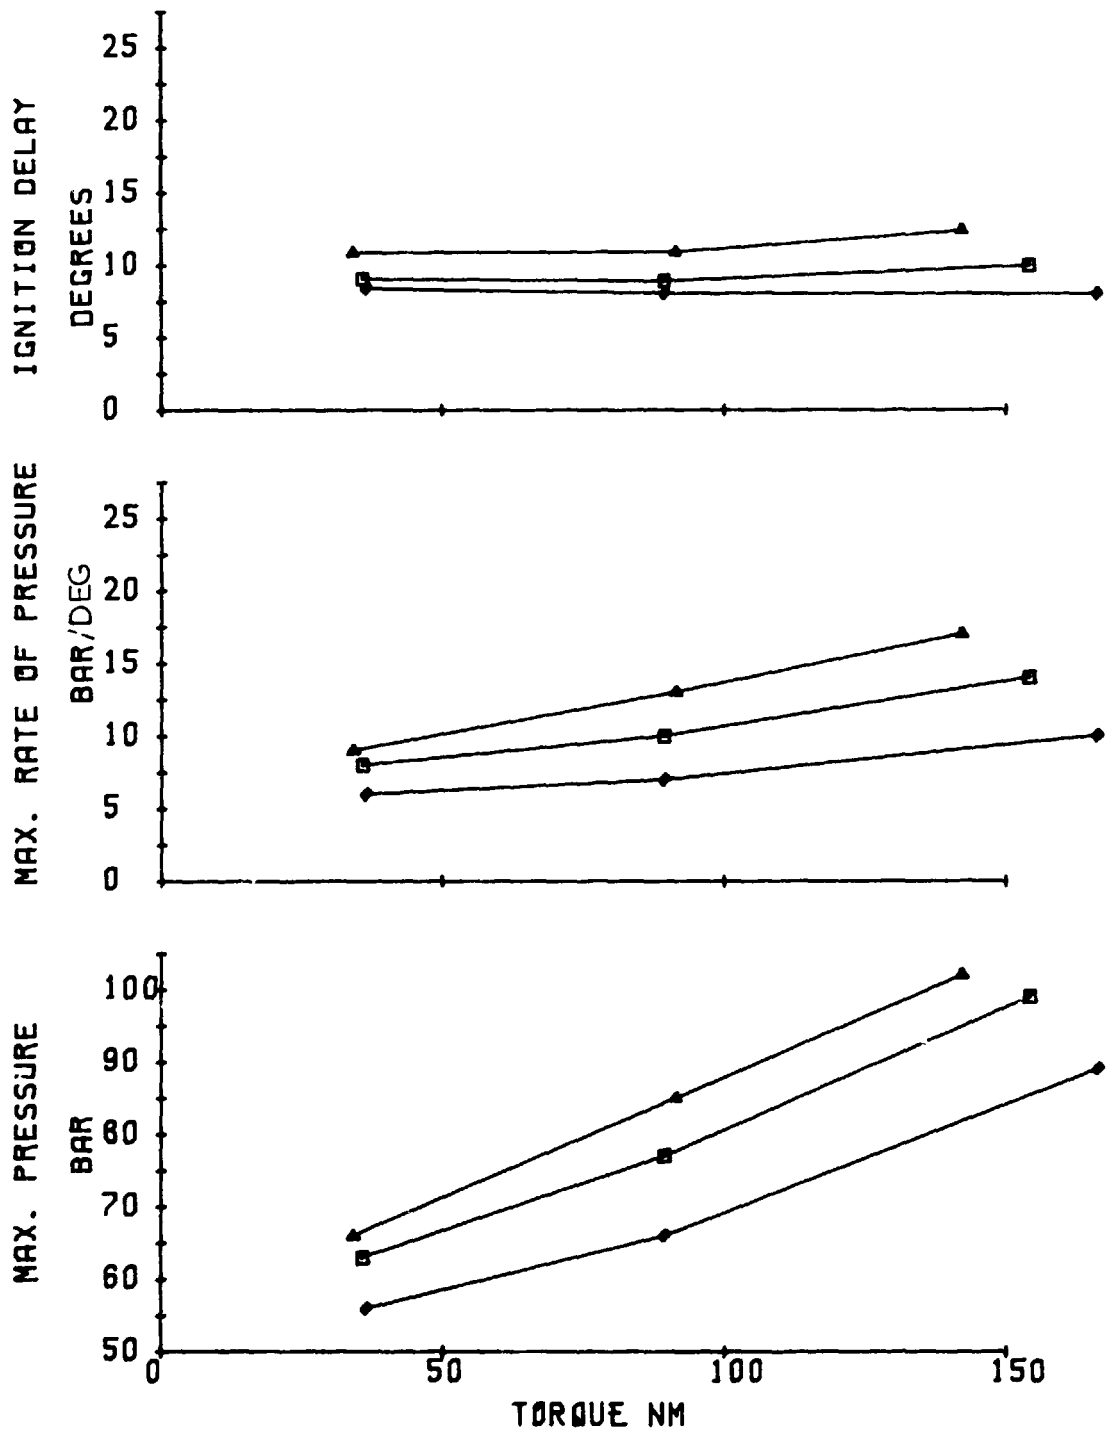




ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ◻ 20 deg BTDC ▲ 26 deg BTDC DIST 100 1400 R.P.M.
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	
FIG AP87	

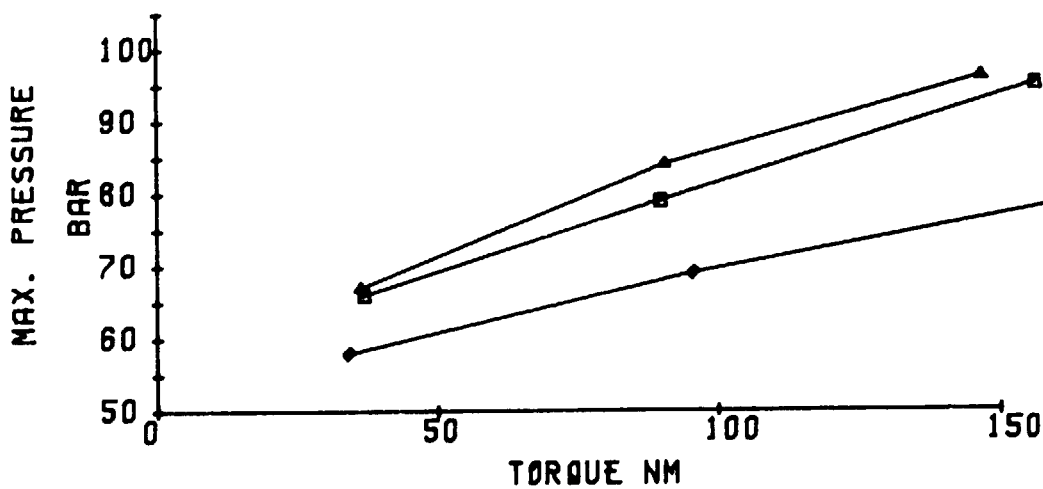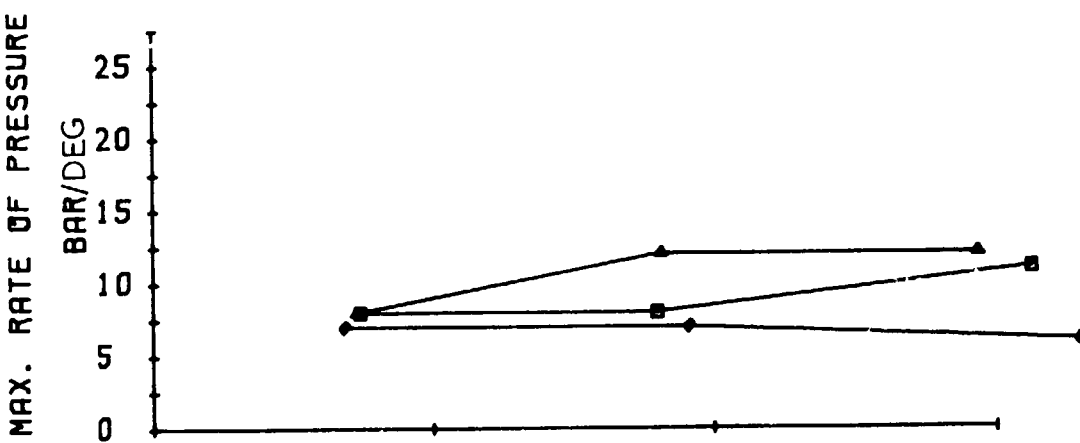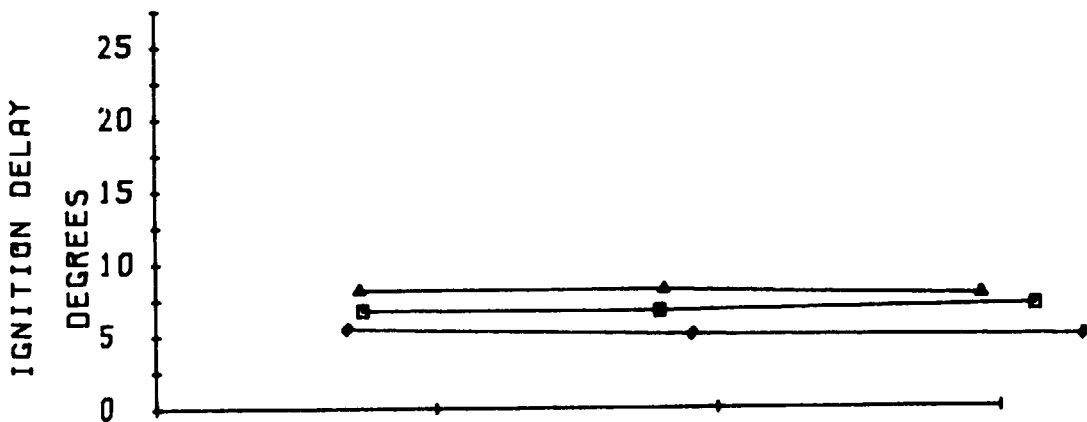


ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC DIST 100 800 R.P.M.
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	FIG AP88

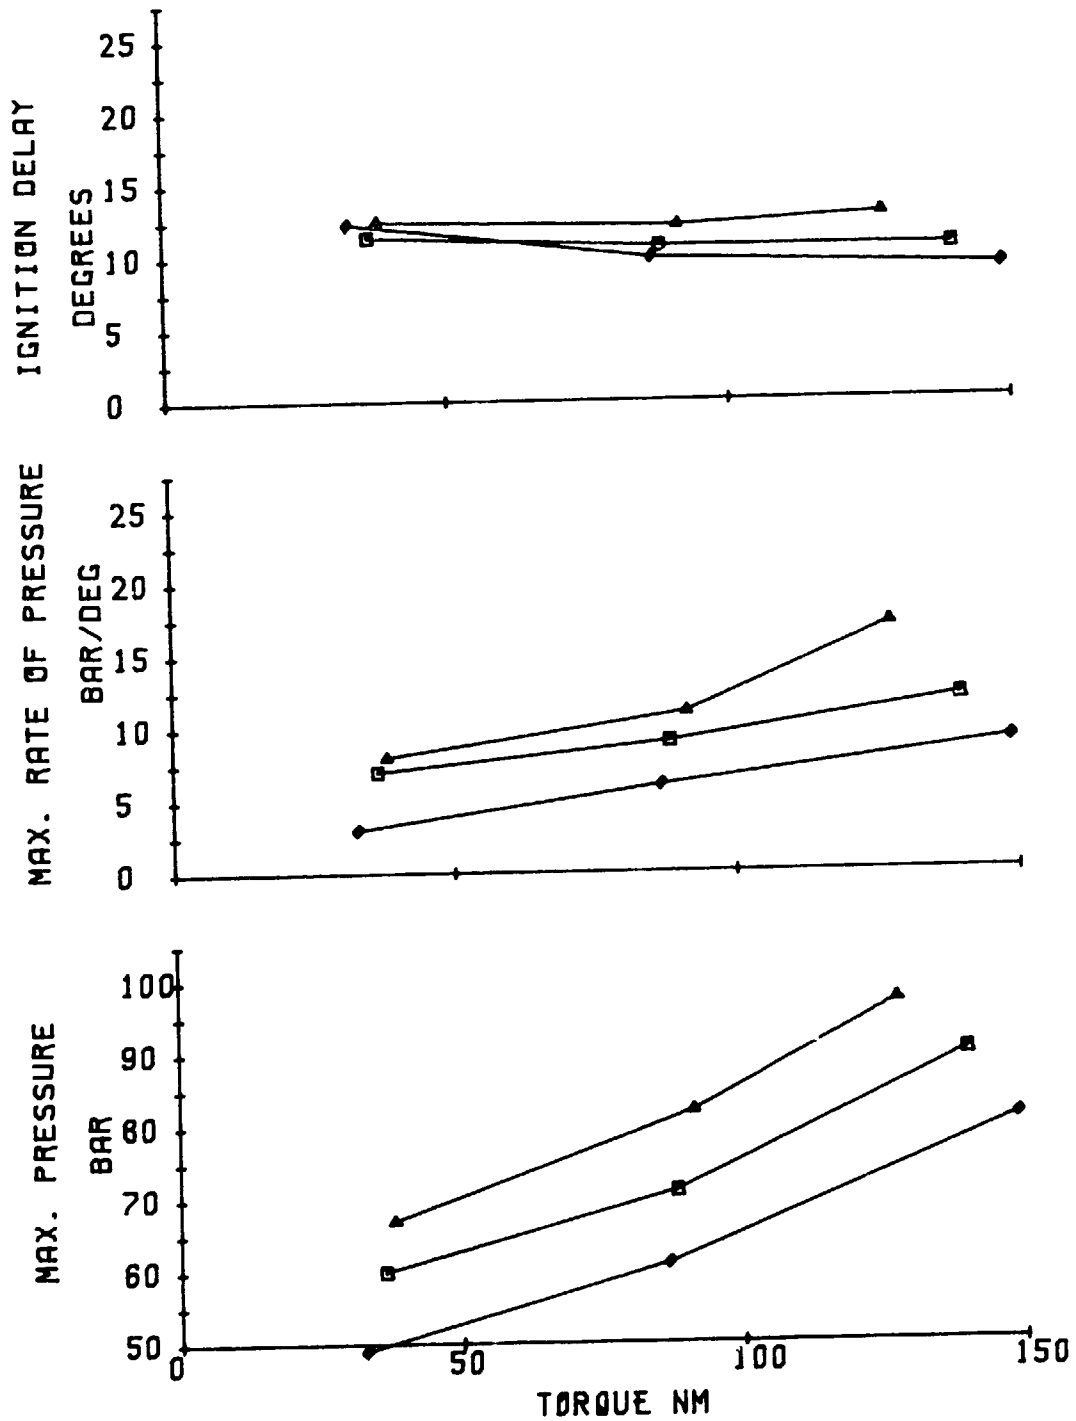


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	
TEGDN3.9 2000 R.P.M. FIG AP89	

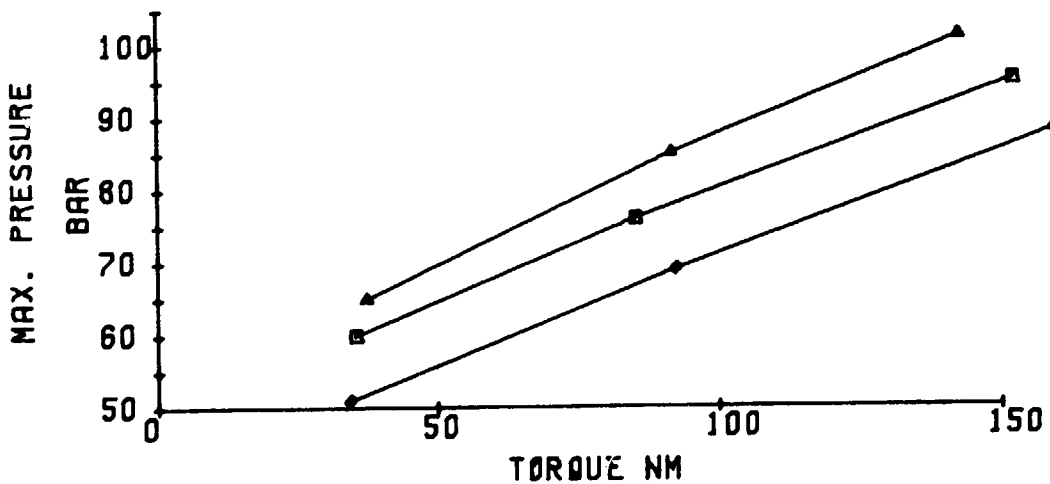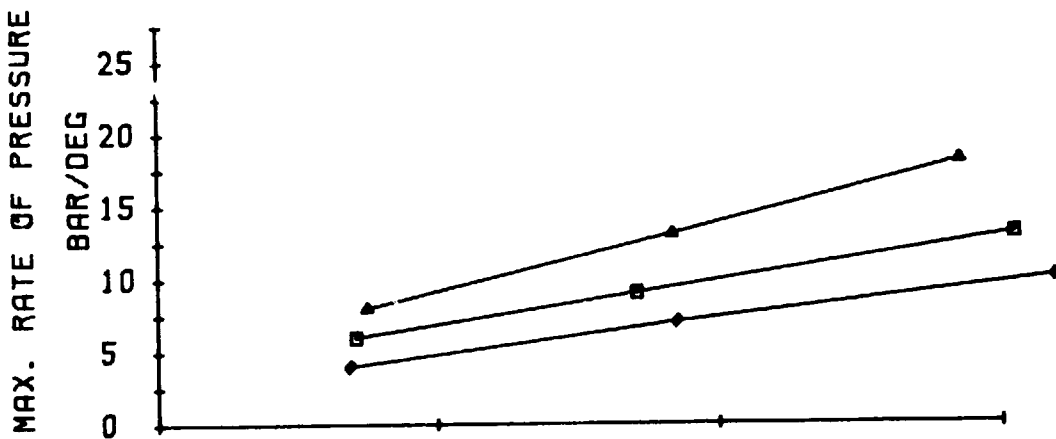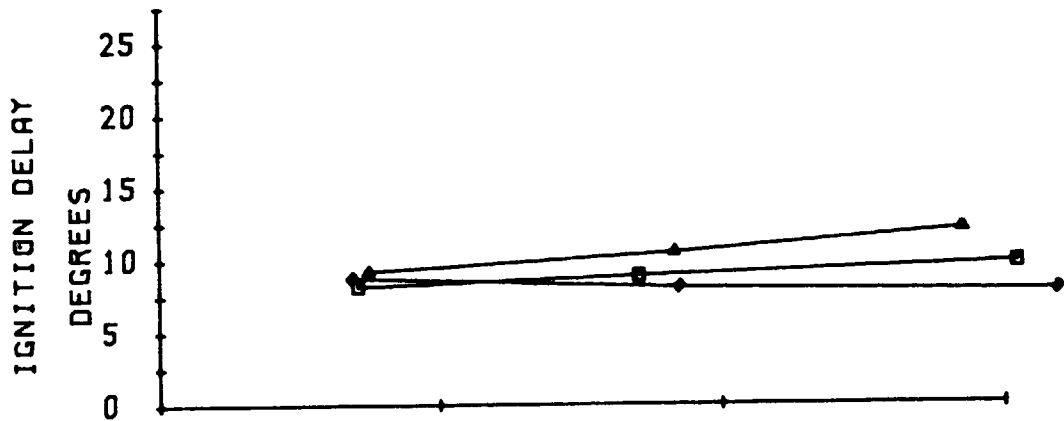


ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC TEGDN3.9 1400 R.P.M.
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	FIG AP90

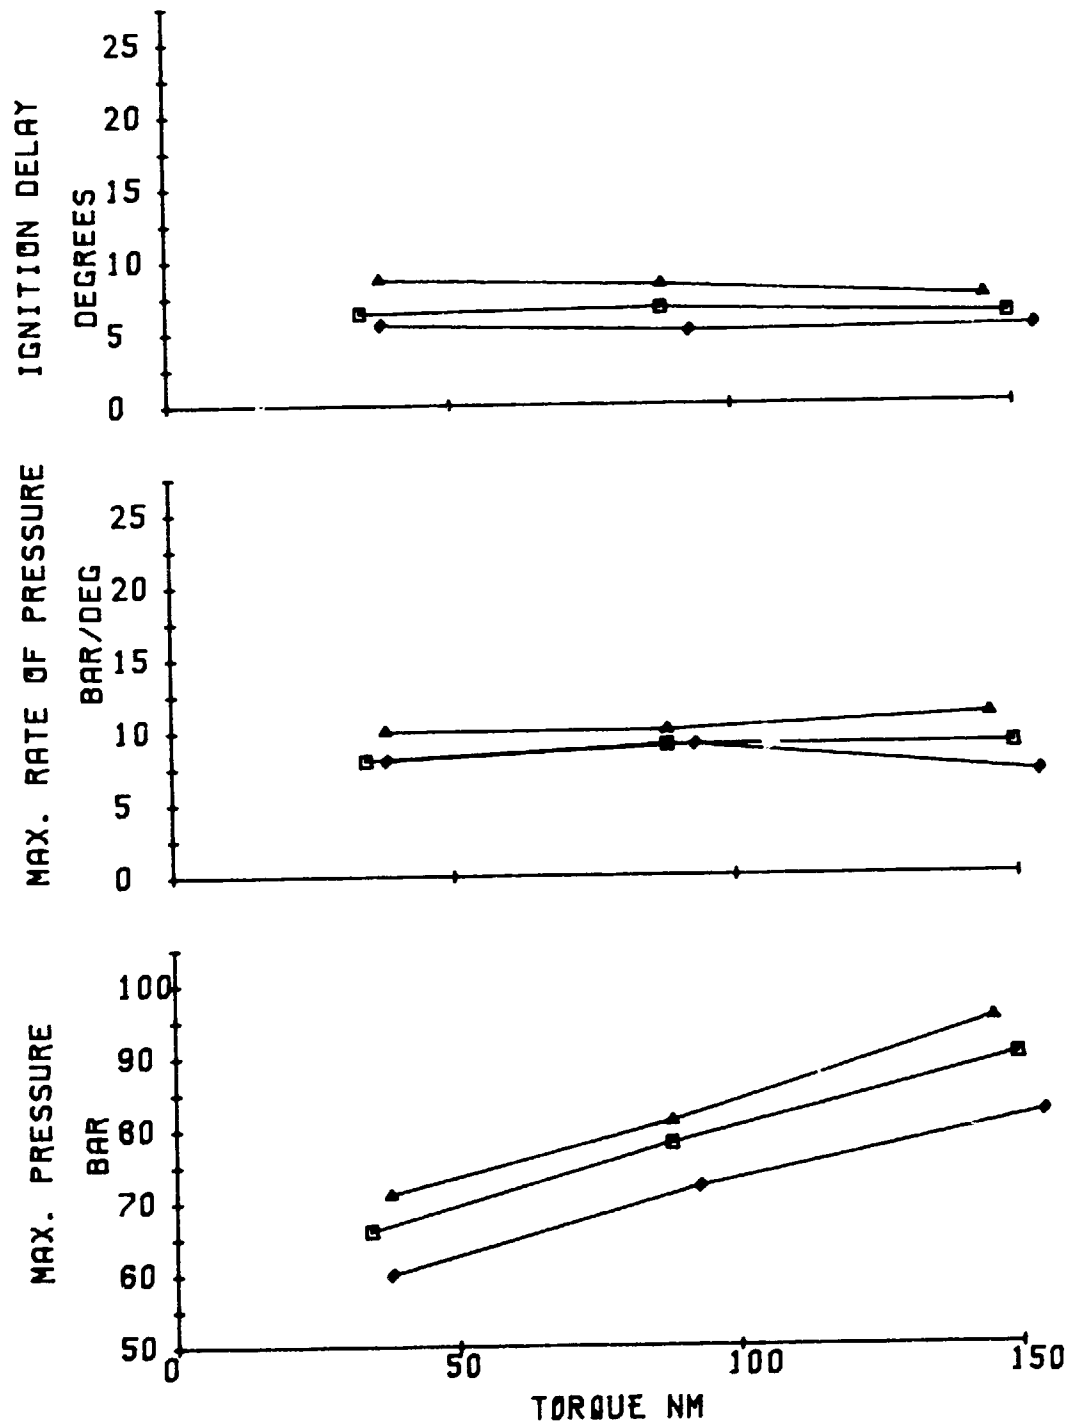

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	TEGDN3.9 800 R.P.M.
	FIG AP91

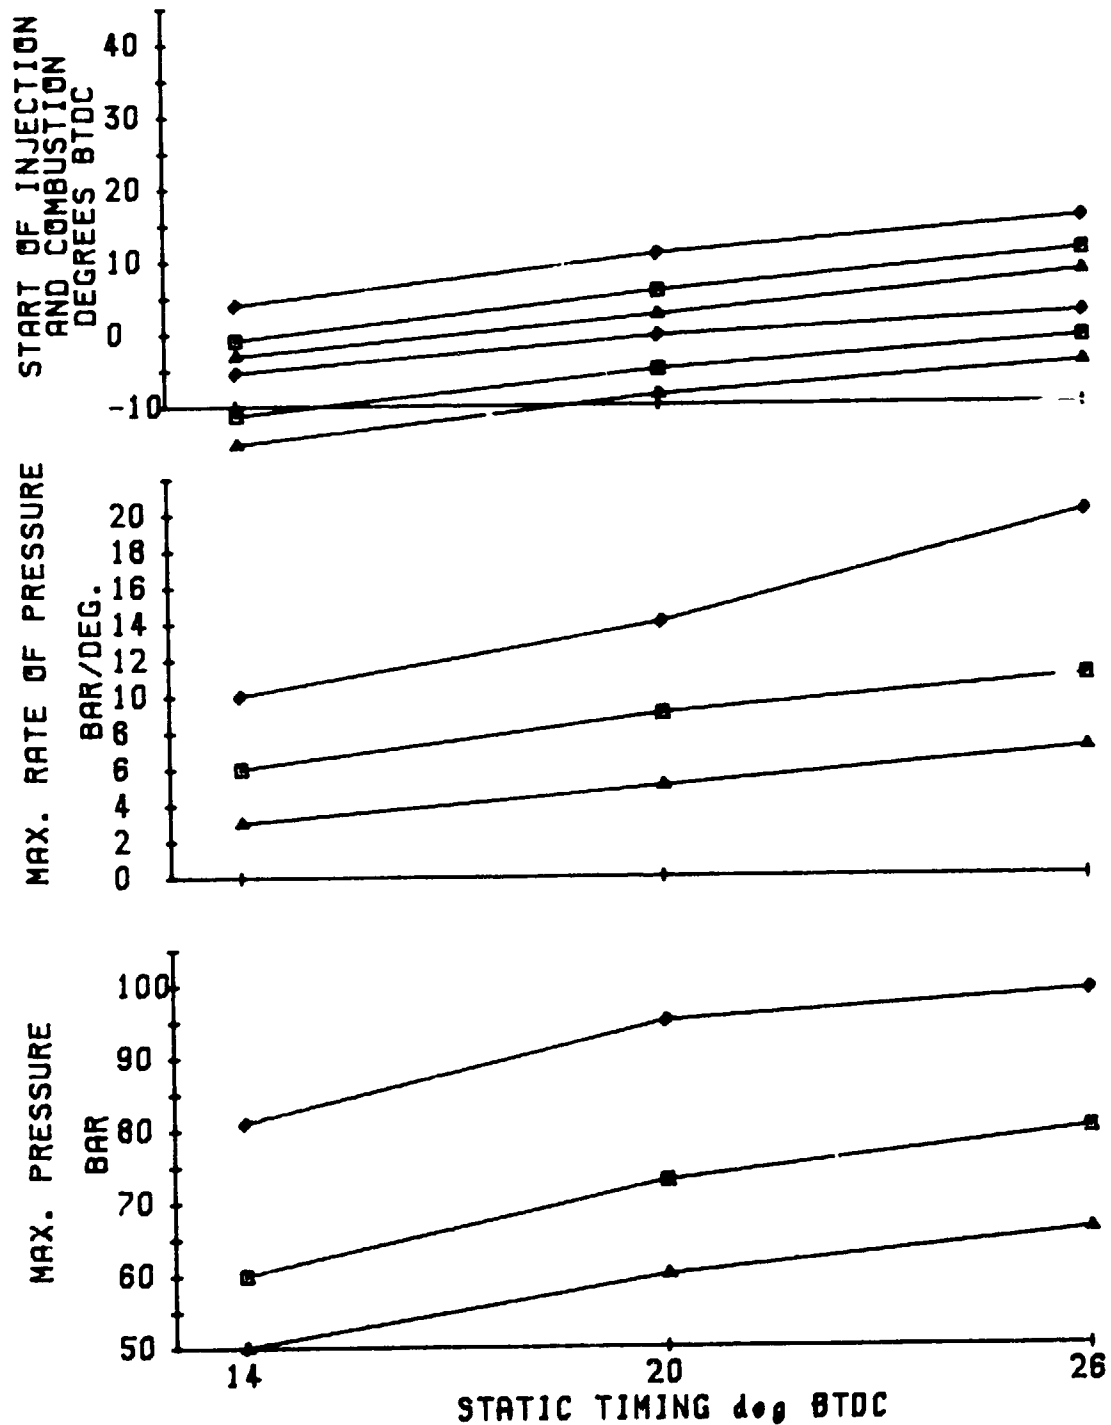

ENGINE : FORD 3000 CAPACITY: 2860	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD DIST 100 2000 R.P.M.
EFFECT OF STATIC TIMING ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP92	

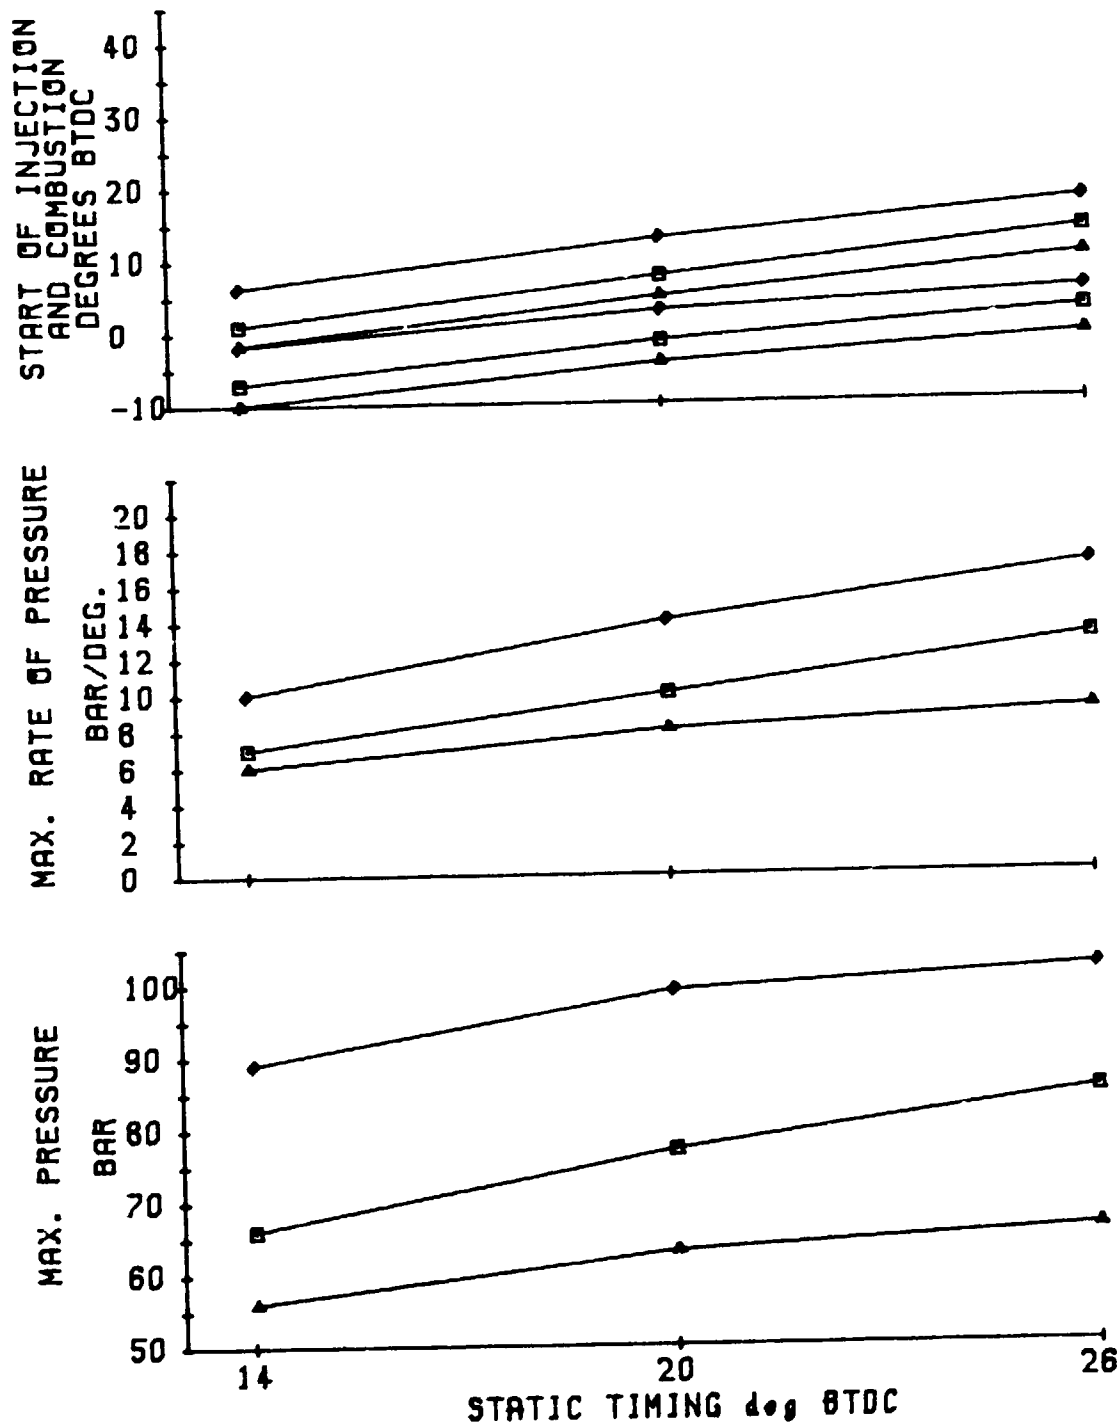


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
START OF: INJECTION, COMBUSTION,
MAX. PRESSURE & PRESSURE RATE

◆ FULL LOAD
■ 2/3 LOAD
▲ 1/3 LOAD
DIST 100
1400 R.P.M.

FIG AP93

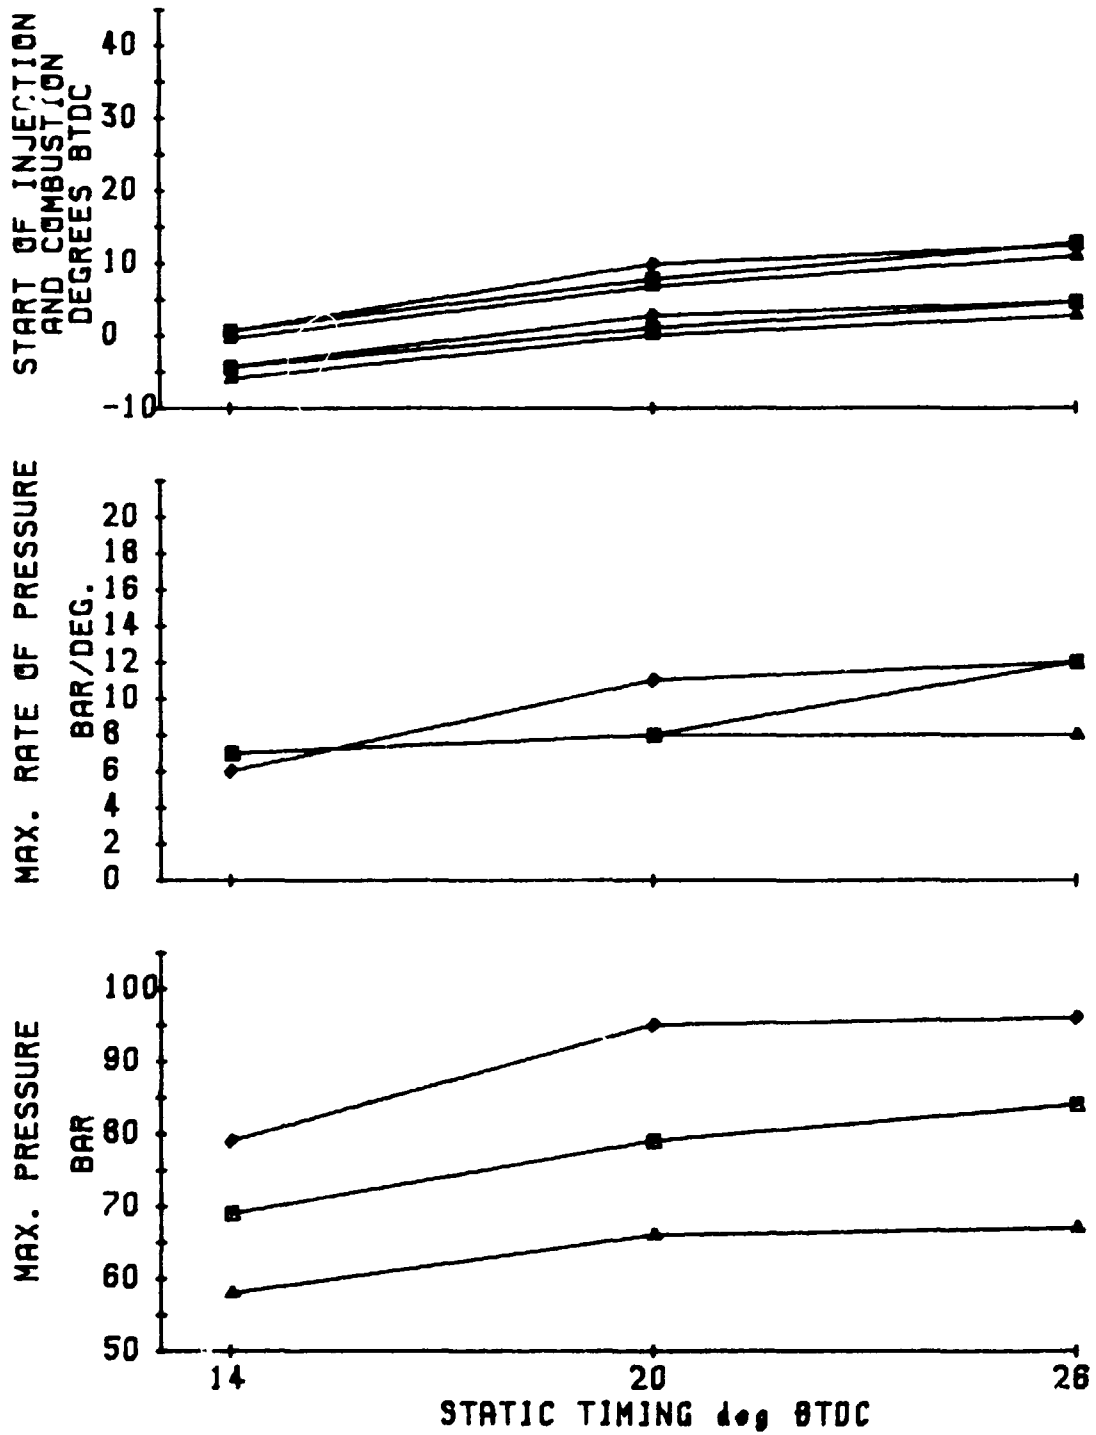

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD
EFFECT OF STATIC TIMING ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
DIST 100 800 R.P.M.	
FIG AP94	

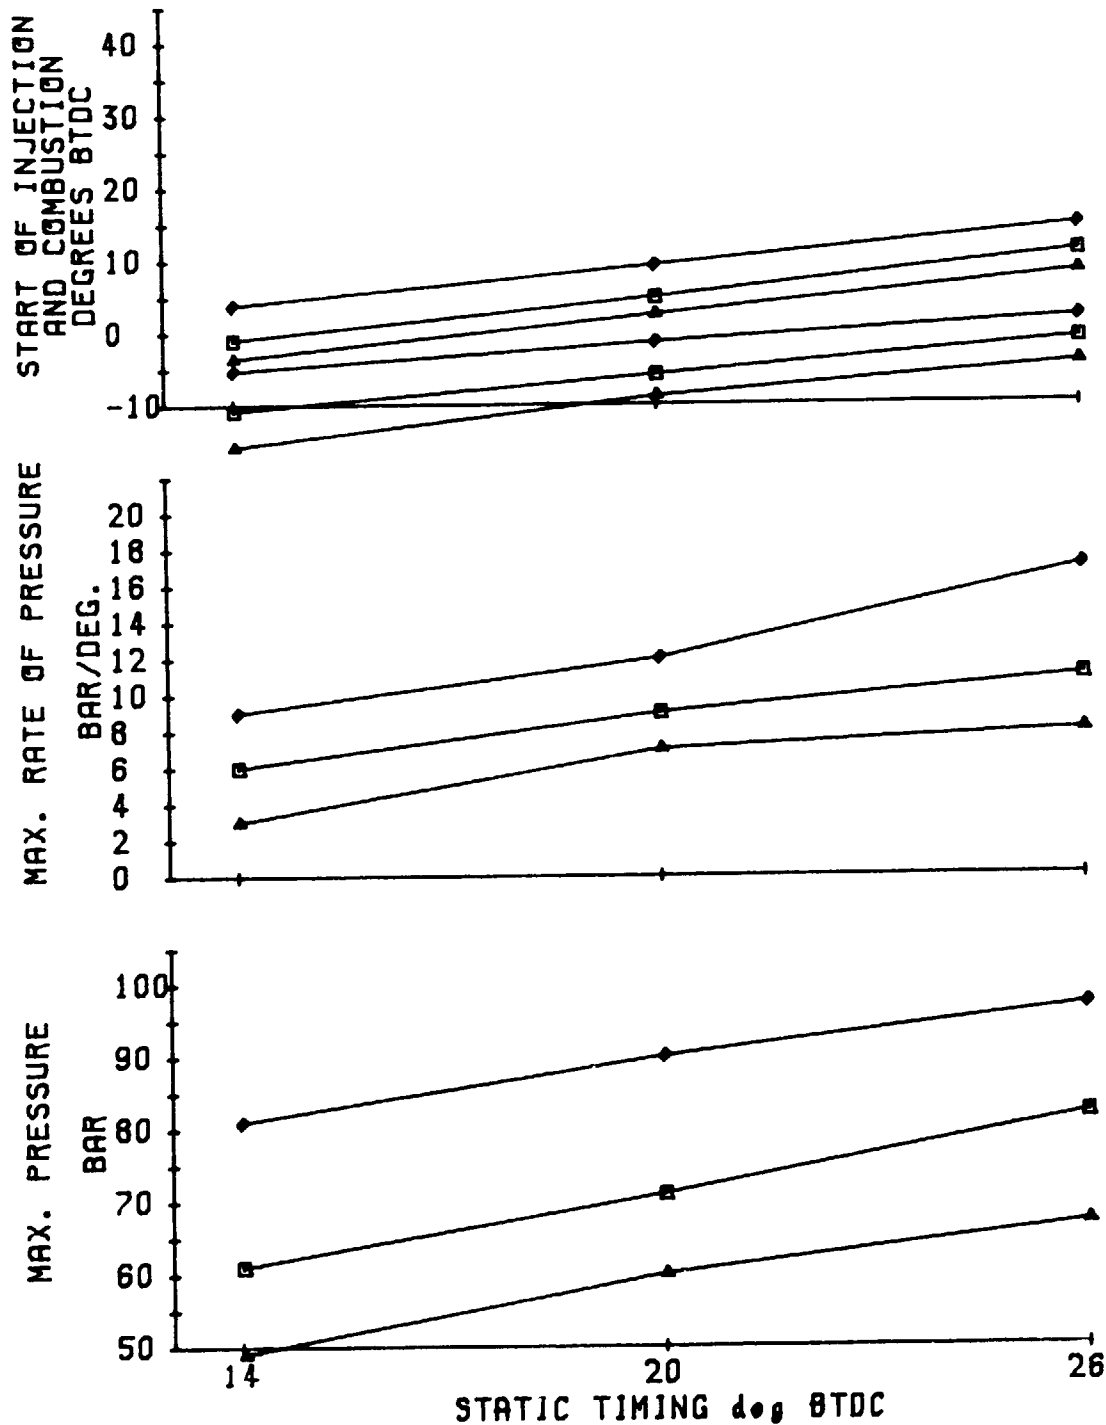


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
START OF: INJECTION, COMBUSTION,
MAX. PRESSURE & PRESSURE RATE

◆ FULL LOAD
■ 2/3 LOAD
▲ 1/3 LOAD
TEGDN3.9
2000 R.P.M.


FIG AP95

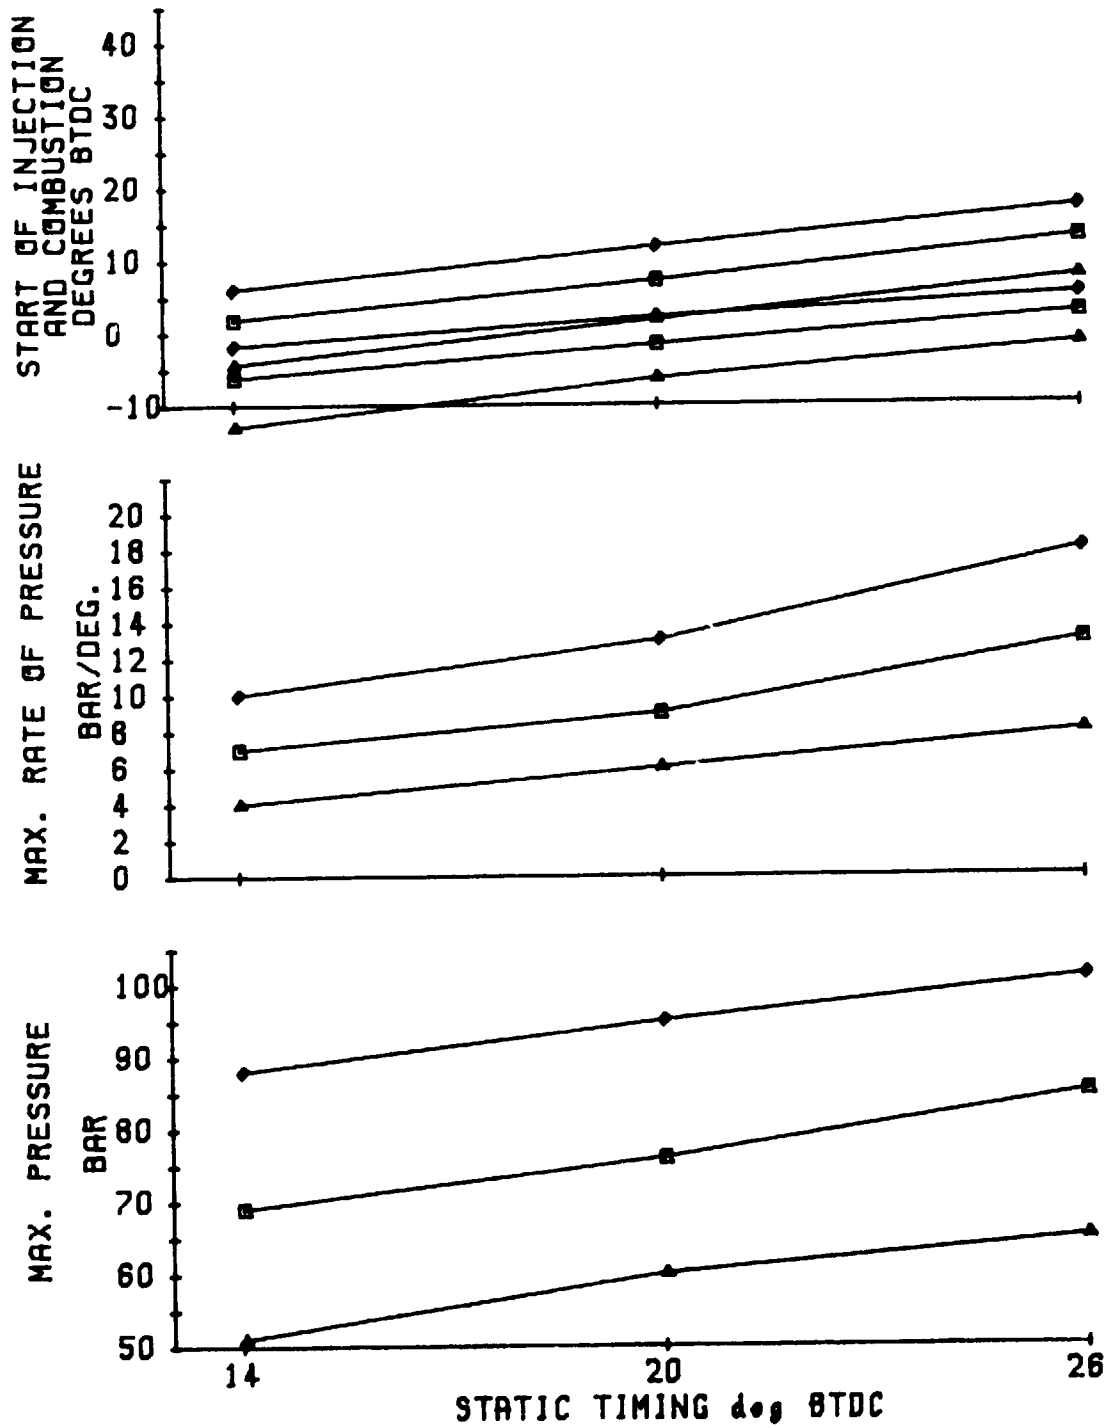


ENGINE : FORD 3000 CAPACITY: 2860	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD TEGDN3.9 1400 R.P.M.
EFFECT OF STATIC TIMING ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	
FIG AP96	

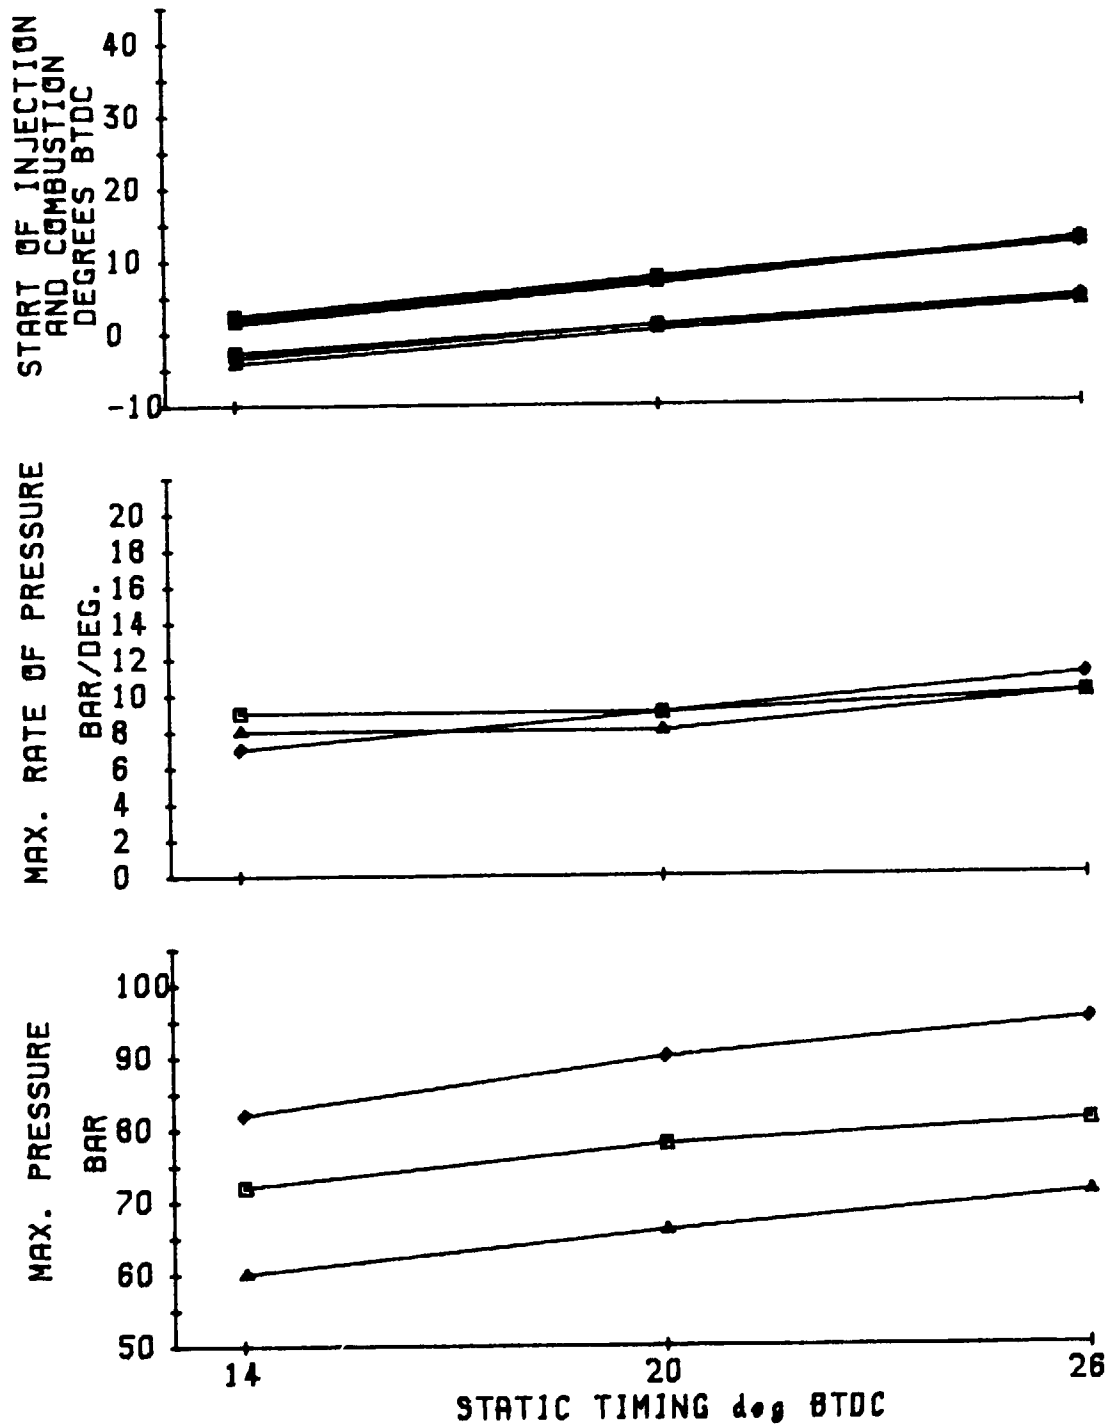


ENGINE : FORD 3000 CAPACITY: 2860	◆ FULL LOAD ■ 2/3 LOAD ▲ 1/3 LOAD TEGDN3.9 600 R.P.M.
EFFECT OF STATIC TIMING ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	FIG AP97

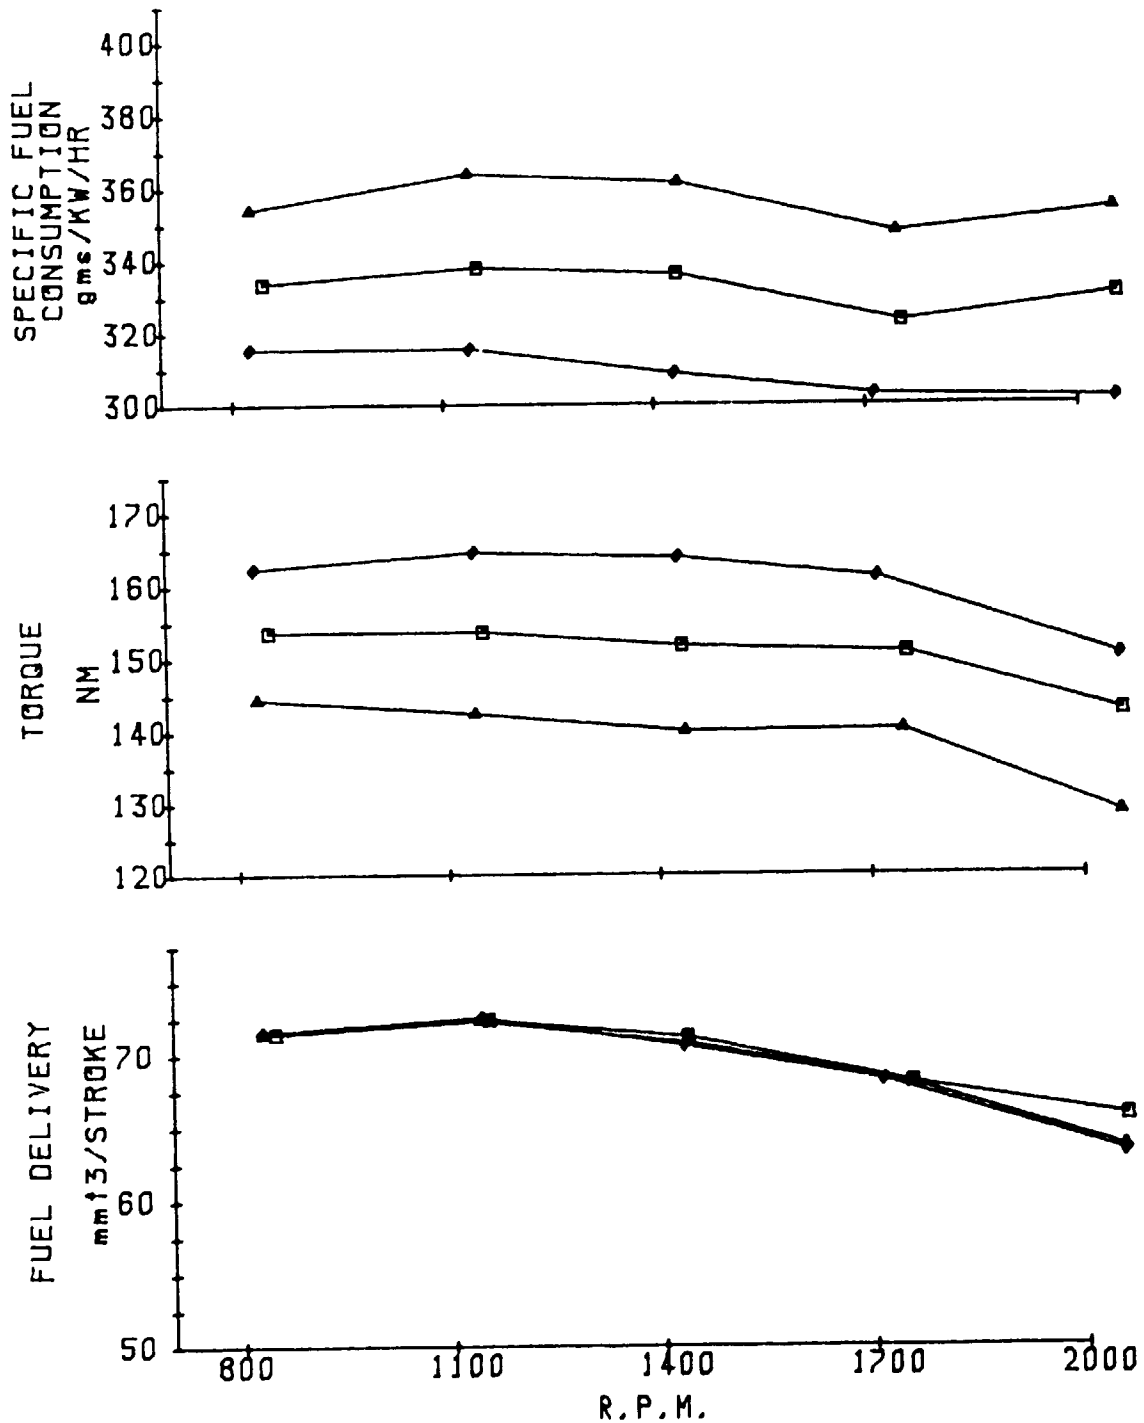

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ◻ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, TORQUE & S.F.C.	DIST 100 FULL LOAD
	FIG AP98

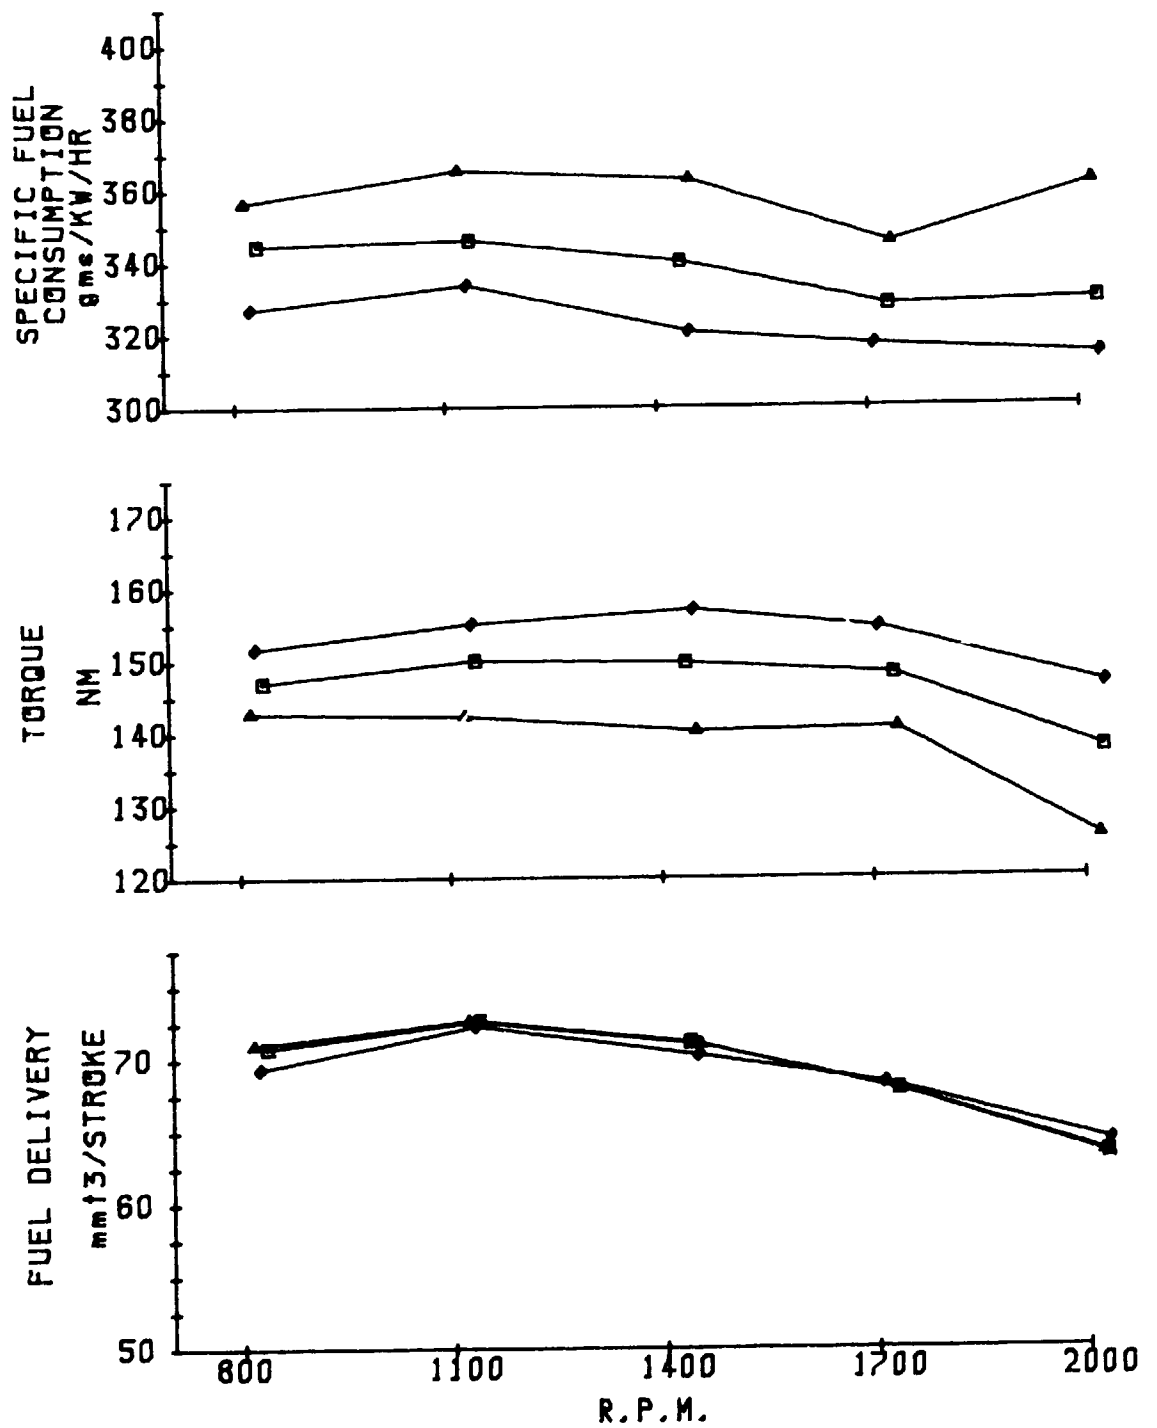

ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ◻ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, TORQUE & S.F.C.	
FIG AP99	

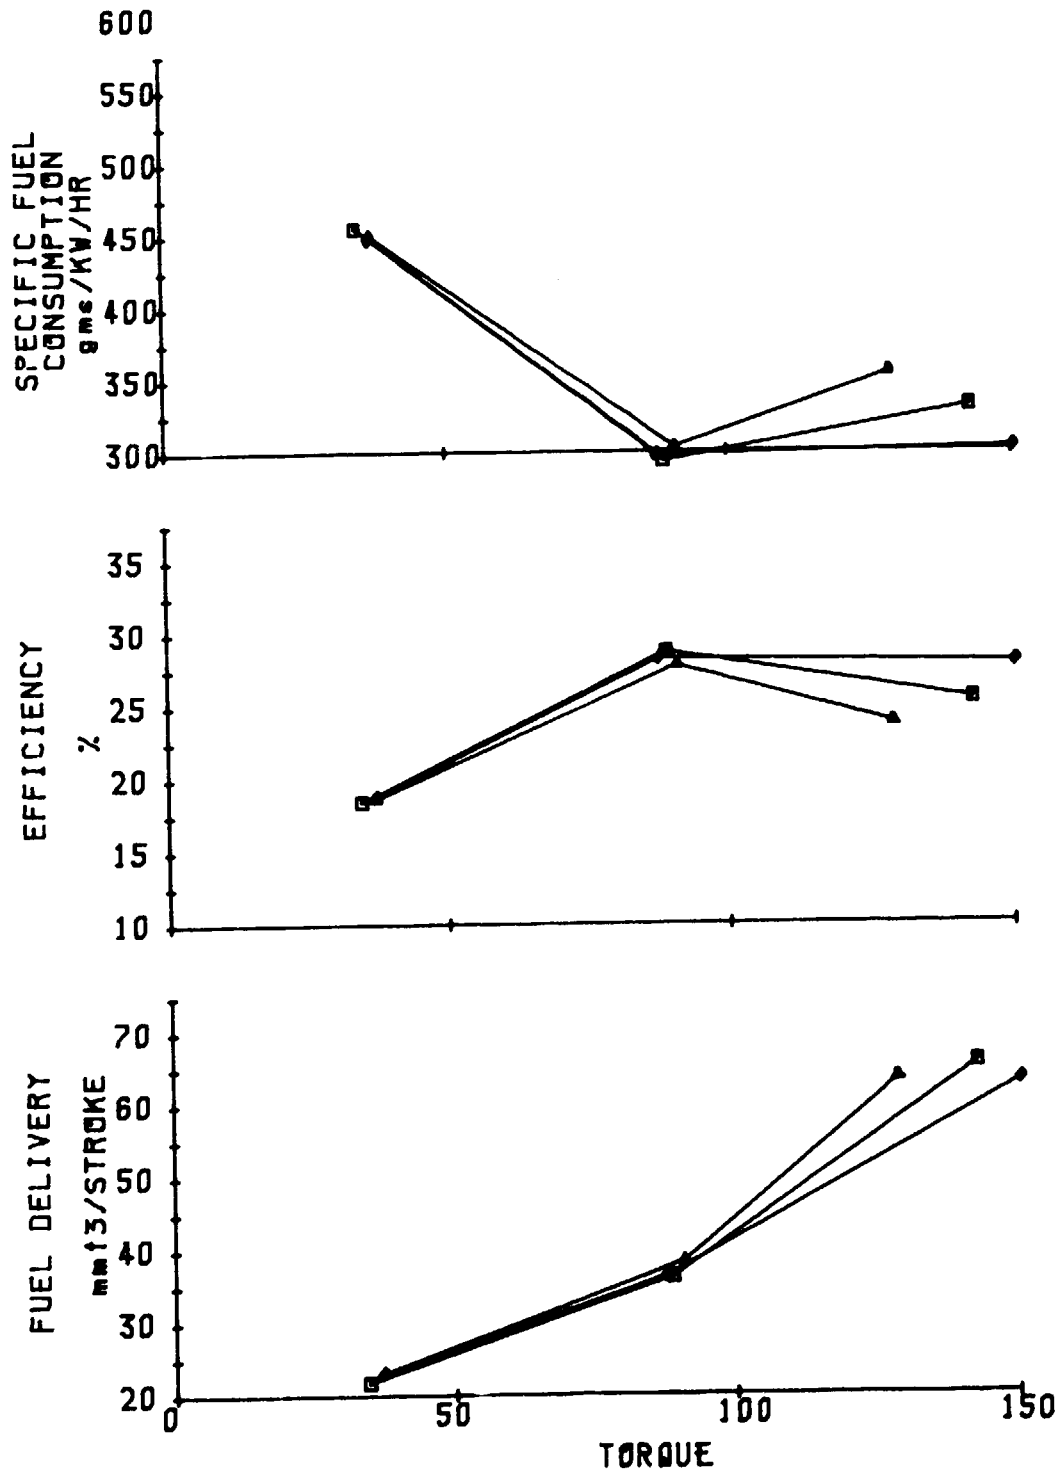


ENGINE : FORD 3000
CAPACITY: 2860


EFFECT OF STATIC TIMING ON
INJECTION PUMP DELIVERY,
EFFICIENCY & S.F.C.

• 14 deg BTDC
■ 20 deg BTDC
▲ 26 deg BTDC
DJST 100
2000 R.P.M.


FIG AP100

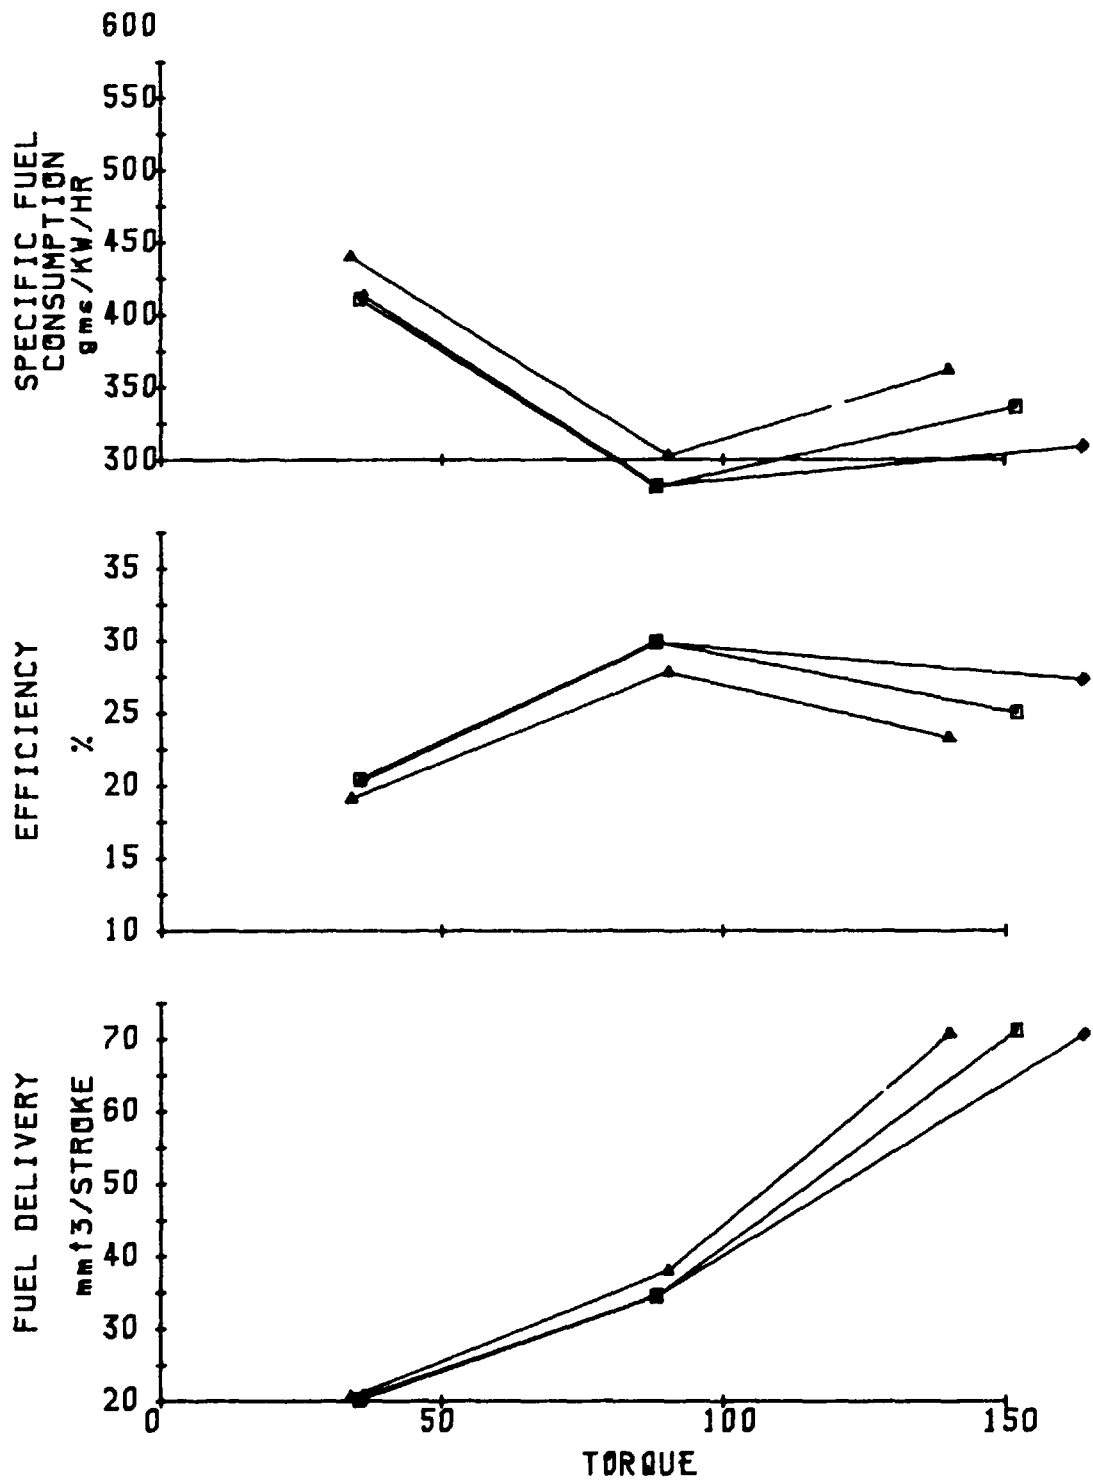


ENGINE : FORD 3000 CAPACITY: 2860	◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC DIST 100 1400 R.P.M.
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP101	

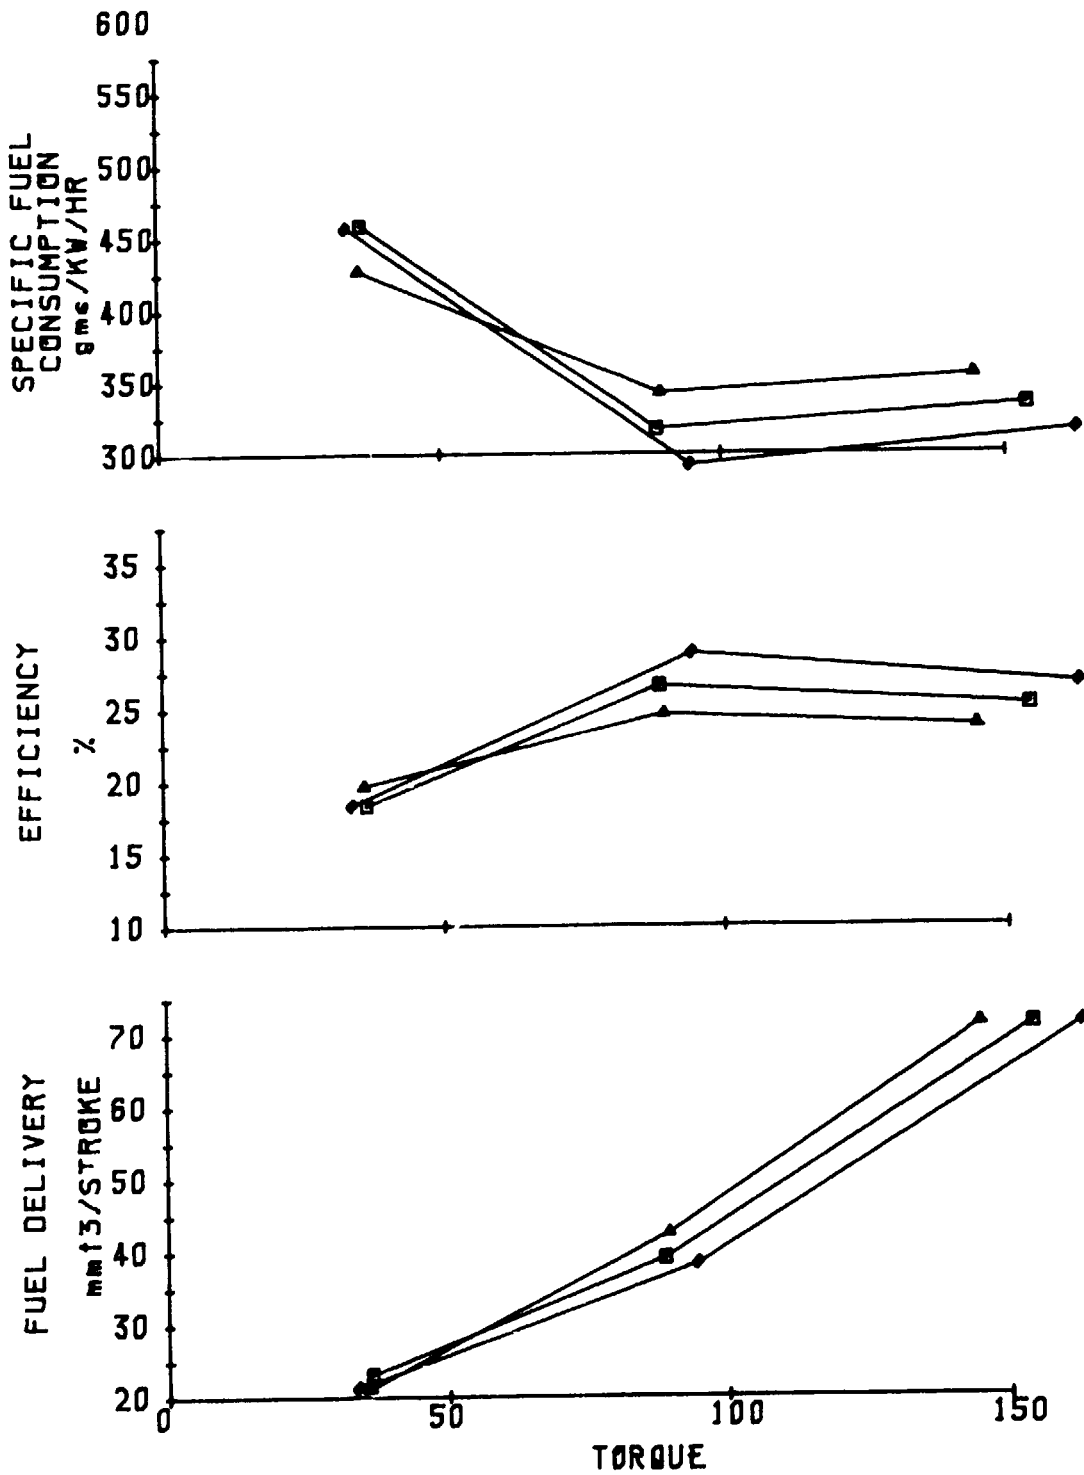


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> • 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC DIST 100 800 R.P.M.
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP102	

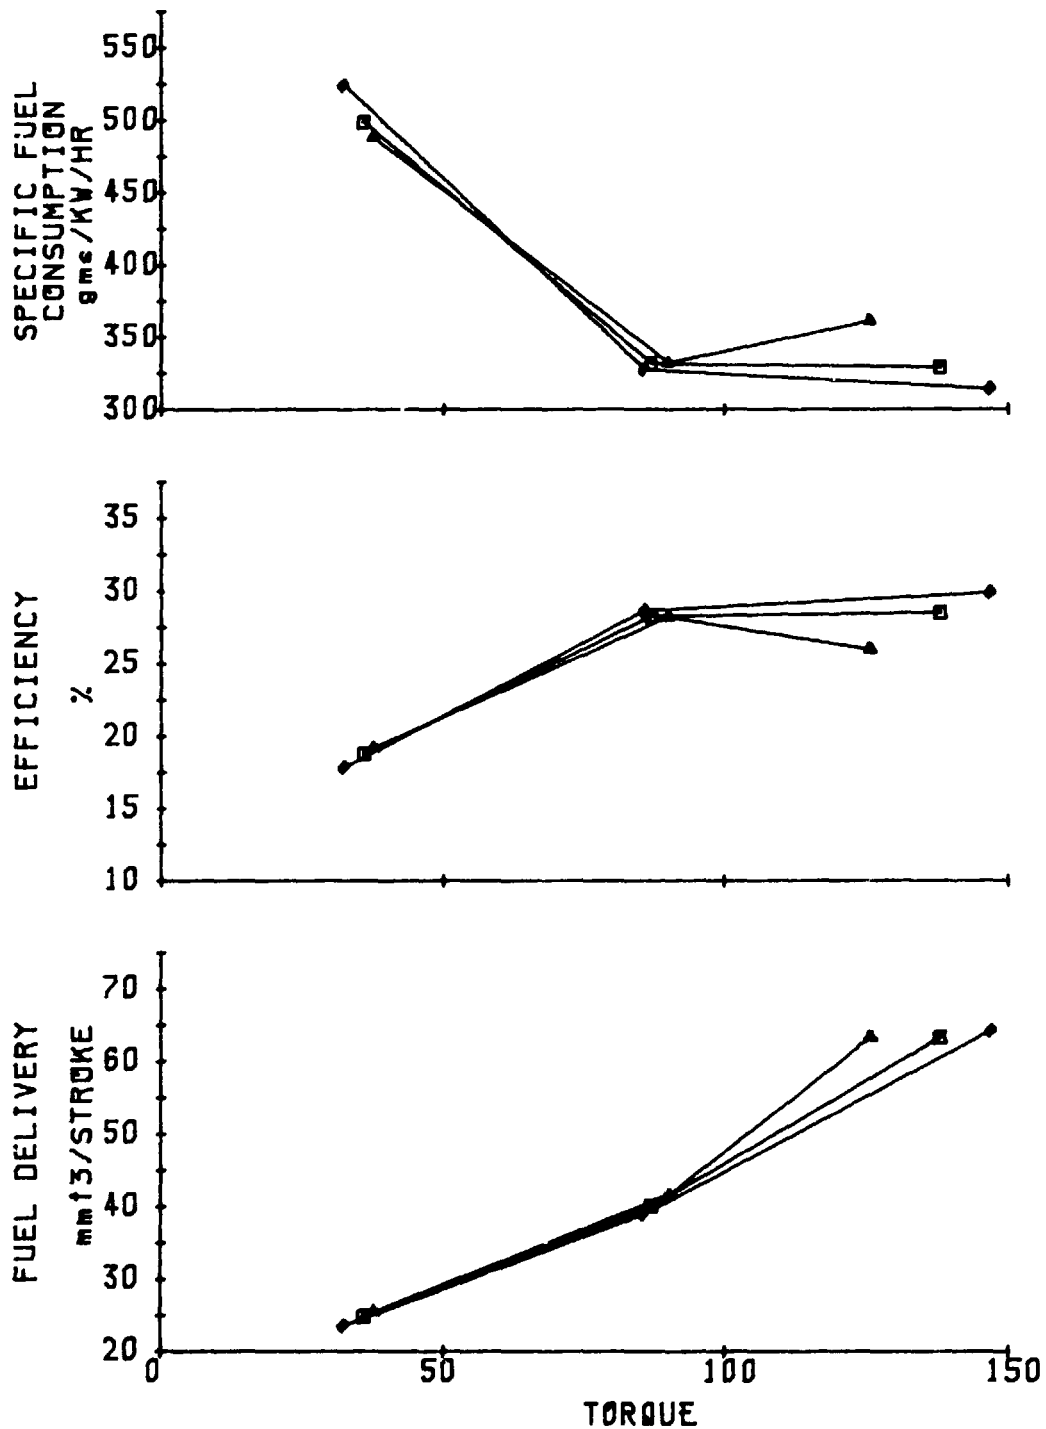


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ◆ 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
TEGDN3.9 2000 R.P.M.	
FIG AP103	

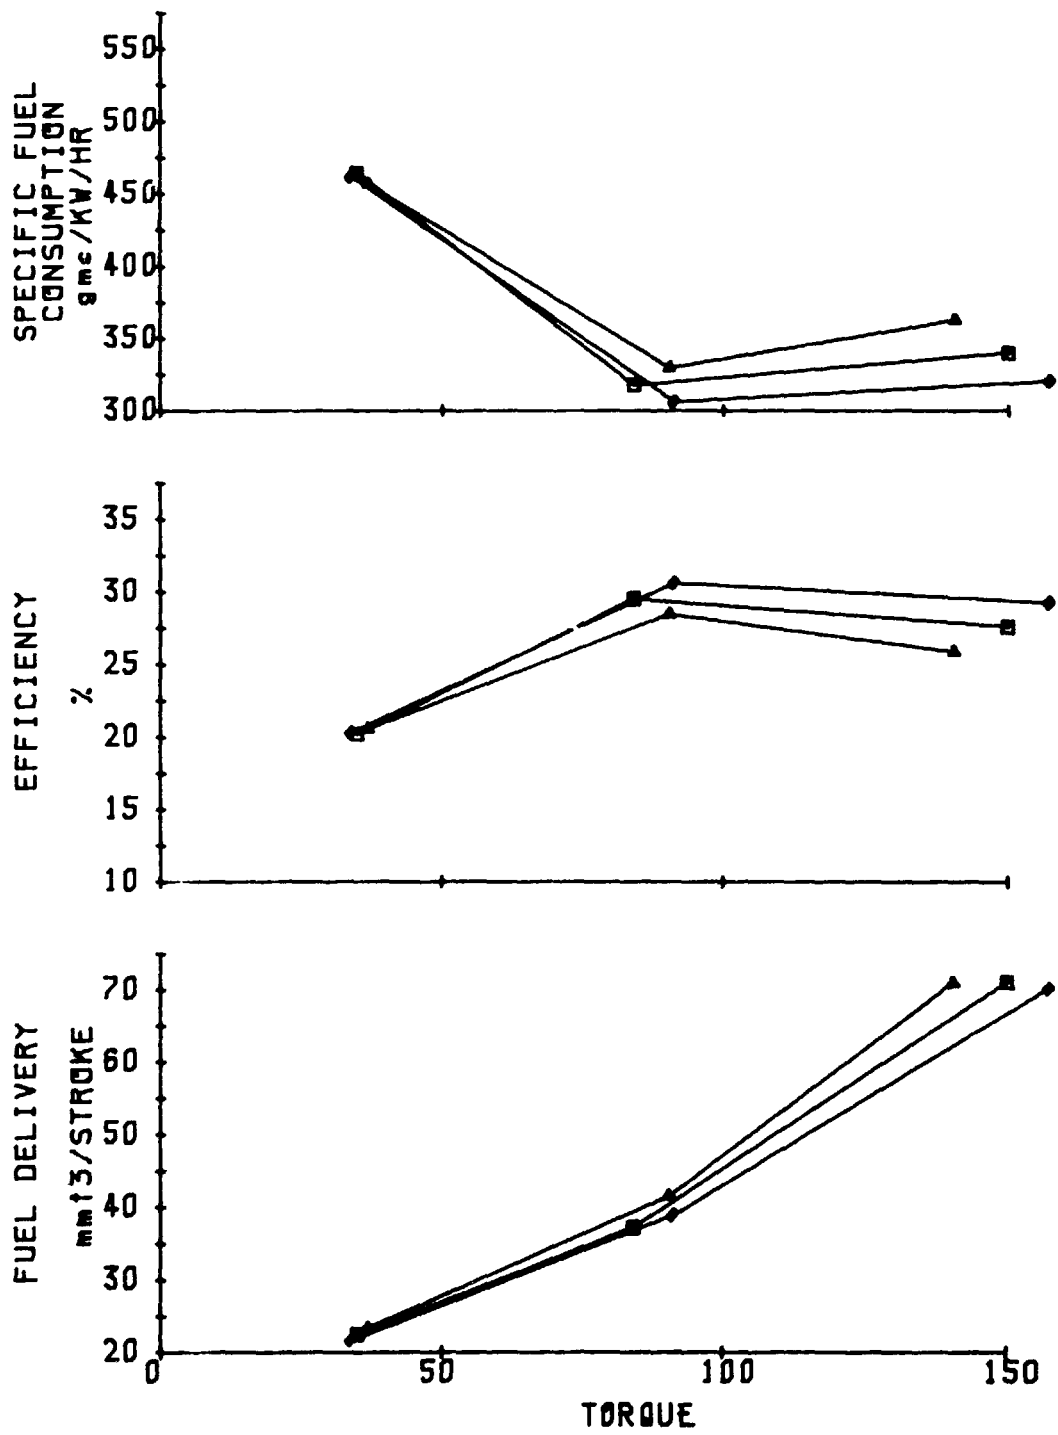


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> ● 14 deg BTDC ■ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
TEGDN3.9 1400 R.P.M.	
FIG AP104	

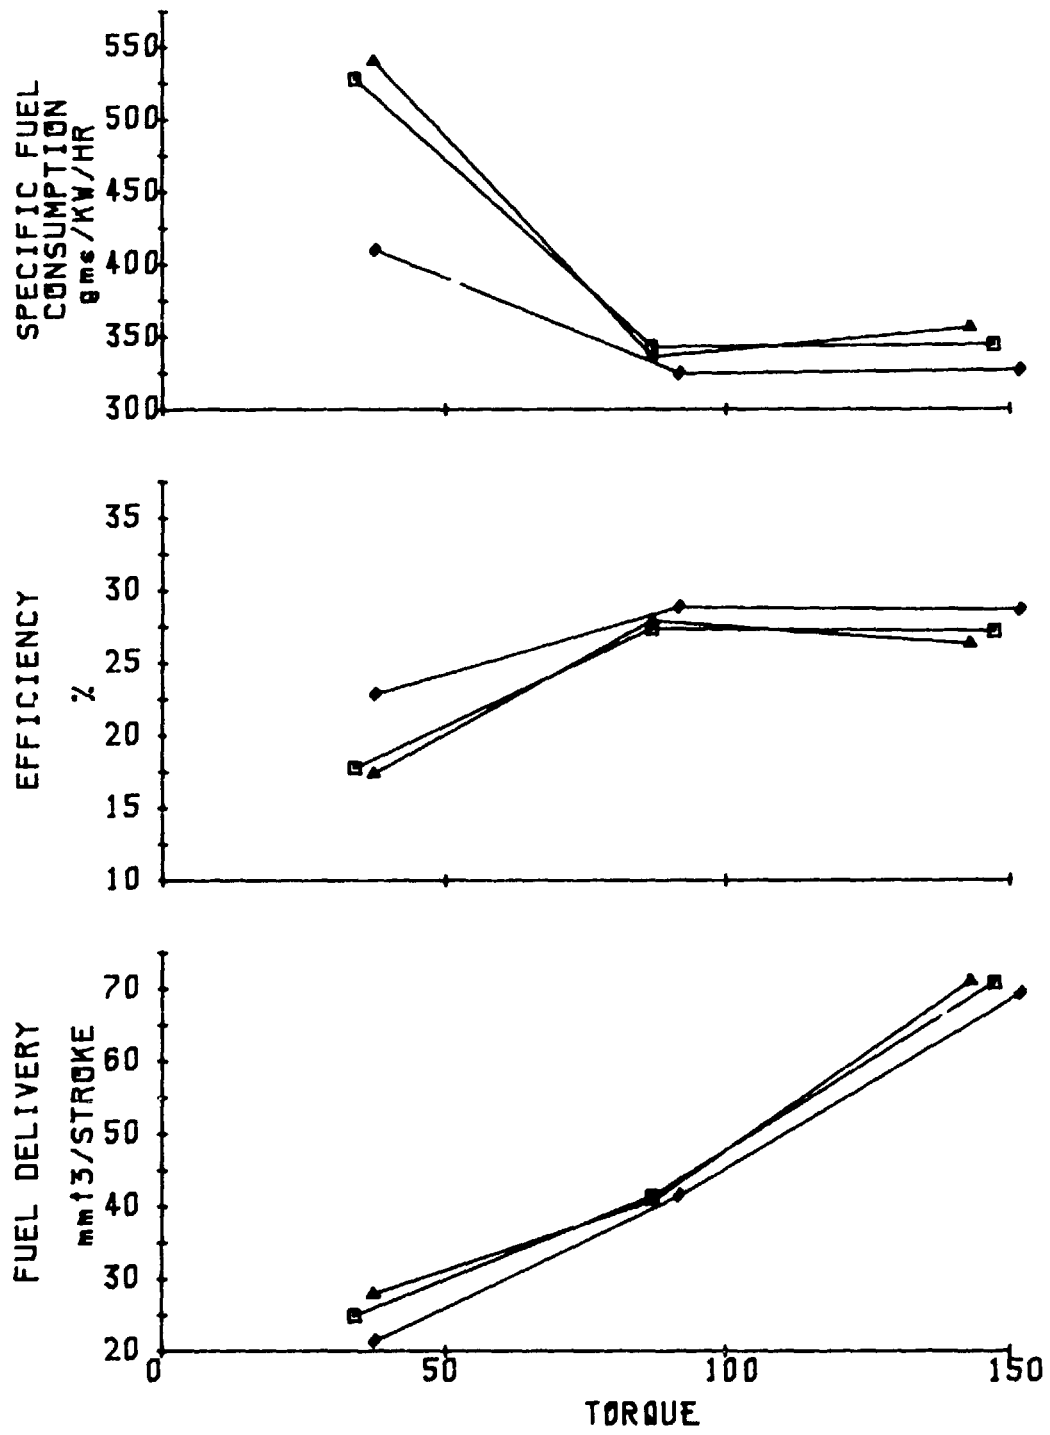


ENGINE : FORD 3000 CAPACITY: 2860	<ul style="list-style-type: none"> • 14 deg BTDC □ 20 deg BTDC ▲ 26 deg BTDC
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
TEGDN3.9 800 R.P.M. FIG AP105	

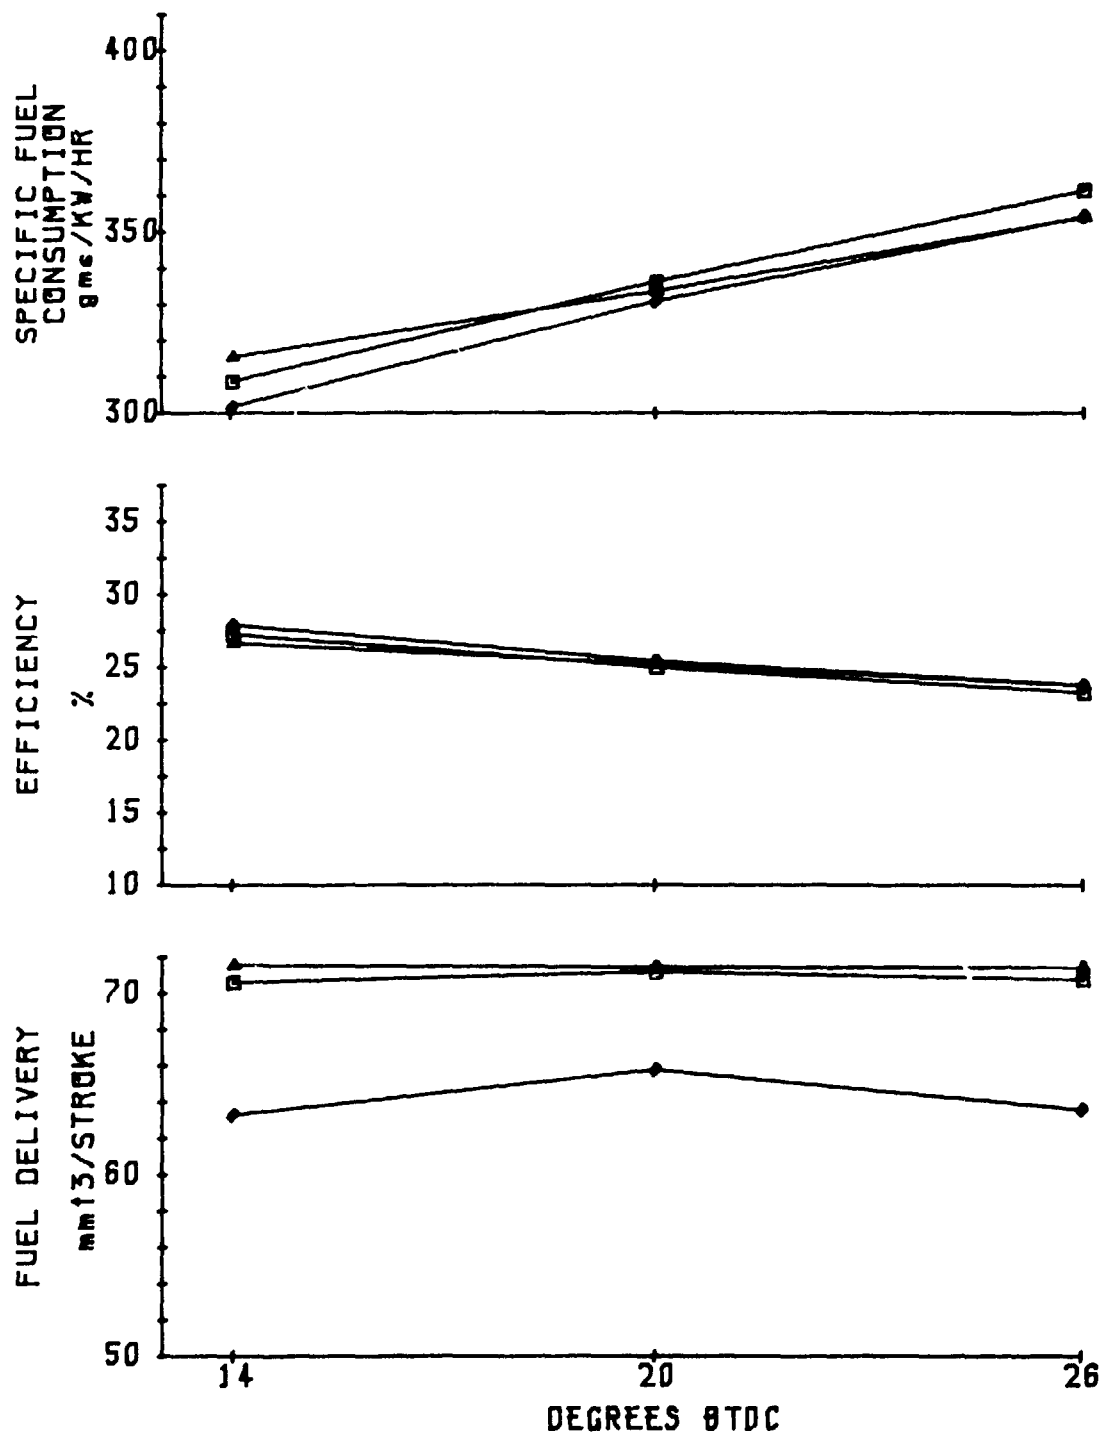


ENGINE : FORD 3000 CAPACITY: 2860	◆ 2000 R.P.M. ■ 1400 R.P.M. ▲ 800 R.P.M. DIST 100 FULL LOAD
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	
FIG AP106	

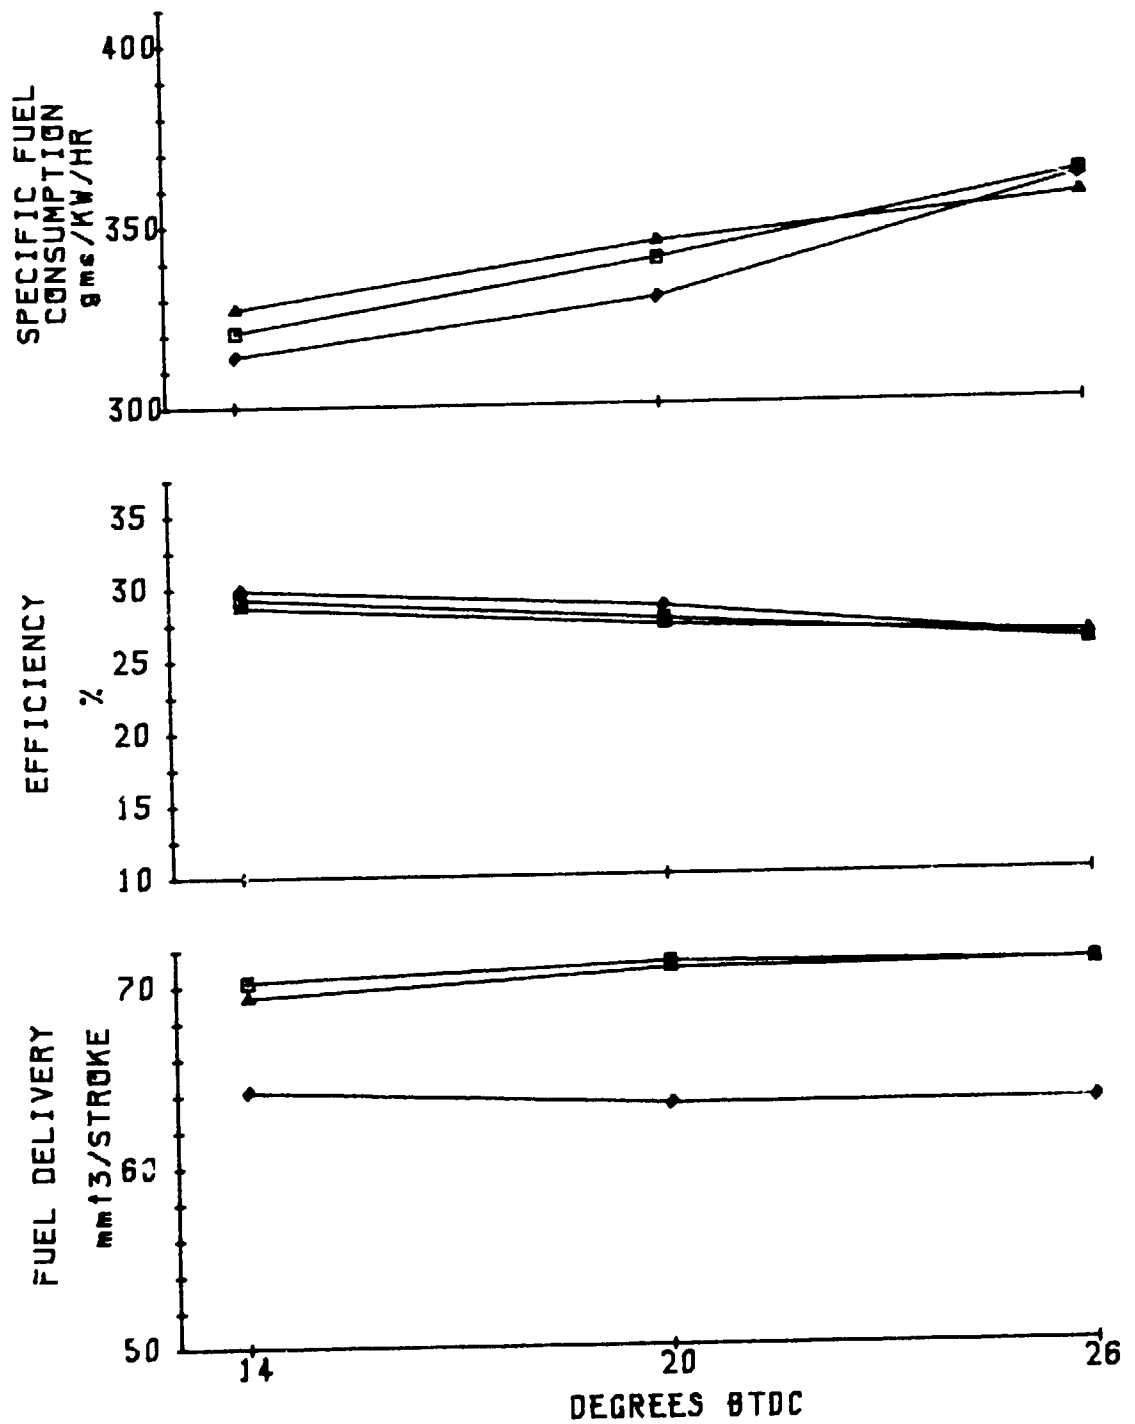


ENGINE : FORD 3000 CAPACITY: 2860	◆ 2000 R.P.M. ■ 1400 R.P.M. ▲ 800 R.P.M. TEGDN3.9 FULL LOAD
EFFECT OF STATIC TIMING ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	FIG AP107

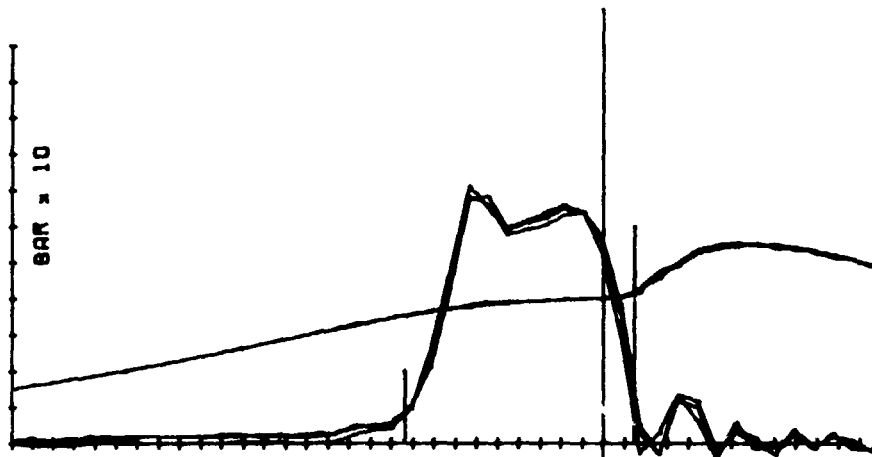

AVERAGE
 TORQUE : 36
 R.P.M. : 2032
 START OF
 INJN. : 9.4
 COMON. : -1.4
 DELAY
 DEGREES : 10.6
 MS : .667
 MAXIMUM
 PRESSURE: 55.5
 RATE : 5
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 164

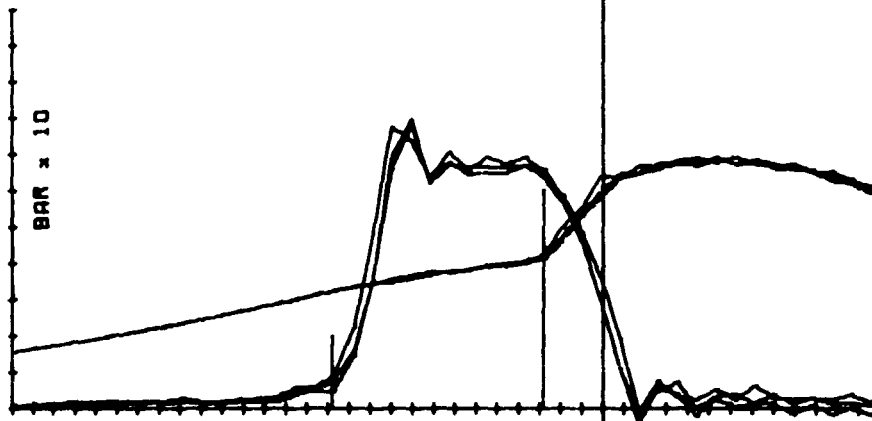

AVERAGE
 TORQUE : 67
 R.P.M. : 2044
 START OF
 INJN. : 12.6
 COMON. : 2.6
 DELAY
 DEGREES : 10
 MS : .614
 MAXIMUM
 PRESSURE: 69.2
 RATE : 7.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 269

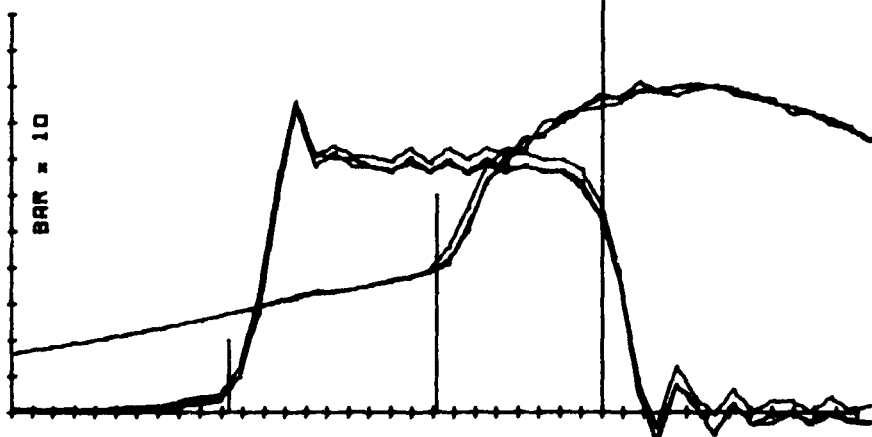


AVERAGE
 TORQUE : 151
 R.P.M. : 2038
 START OF
 INJN. : 17.7
 COMON. : 7.8
 DELAY
 DEGREES : 9.6
 MS : .605
 MAXIMUM
 PRESSURE: 90.6
 RATE : 12.3
 TEMPERATURES
 AIR INLET: 32
 EXHAUST : 420


DEGREES

T. D. C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UNID016	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP108	

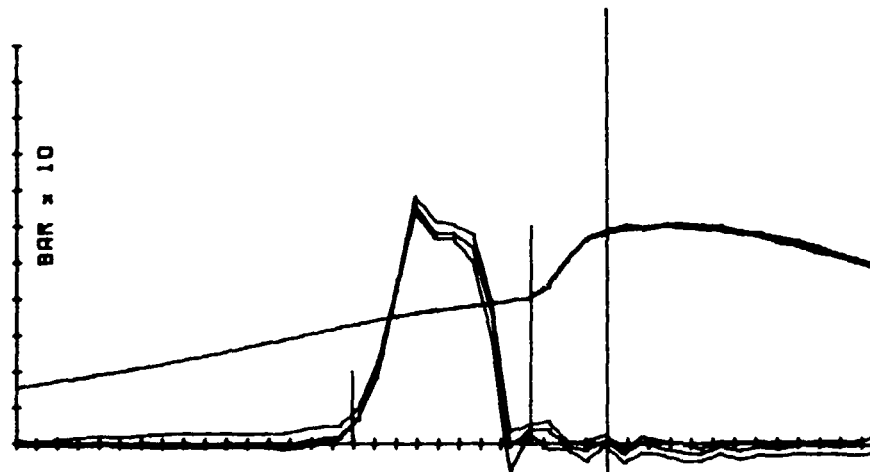

AVERAGE
 TORQUE : 38
 R.P.M. : 1426
 START OF
 INJN. : 12.1
 COMBN. : 3.6
 DELAY
 DEGREES : 6.5
 MS : .89
 MAXIMUM
 PRESSURE: 60.5
 RATE : 7.1
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 151

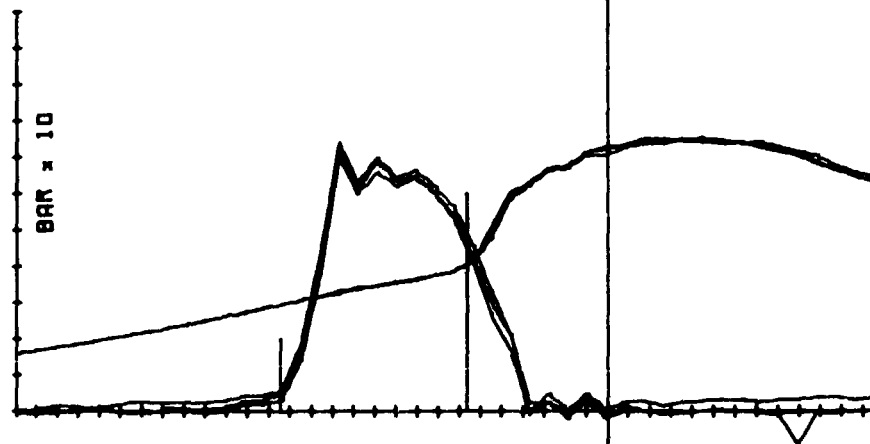


AVERAGE
 TORQUE : 92
 R.P.M. : 1437
 START OF
 INJN. : 15.5
 COMBN. : 6.7
 DELAY
 DEGREES : 6.6
 MS : 1.019
 MAXIMUM
 PRESSURE: 75
 RATE : 9.6
 TEMPERATURES
 AIR INLET: 29
 EXHAUST : 226




AVERAGE
 TORQUE : 160
 R.P.M. : 1451
 START OF
 INJN. : 18.6
 COMBN. : 10.8
 DELAY
 DEGREES : 9
 MS : 1.025
 MAXIMUM
 PRESSURE: 98.9
 RATE : 11.2
 TEMPERATURES
 AIR INLET: 33
 EXHAUST : 400

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNID016	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP109	

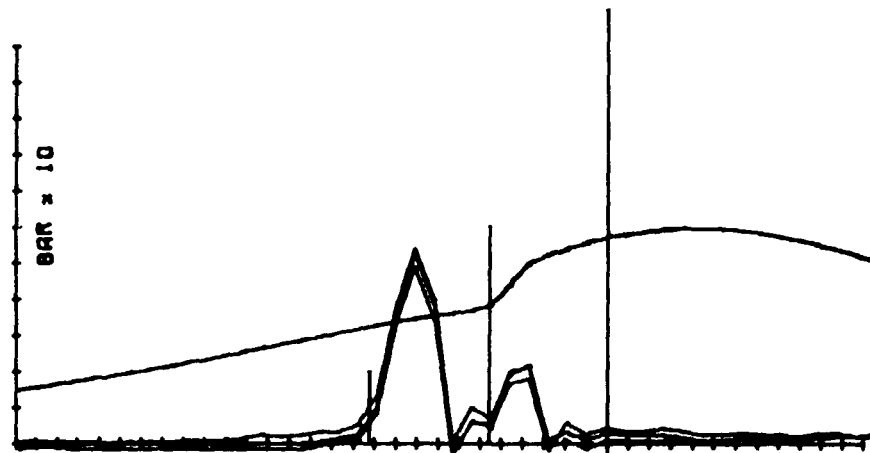

AVERAGE
 TORQUE : 36
 R.P.M. : 612
 START OF
 INJN. : 11.2
 COMON. : 5.5
 DELAY
 DEGREES : 5.7
 μS : 1.167
 MAXIMUM
 PRESSURE: 58.9
 RATE : 6
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 127

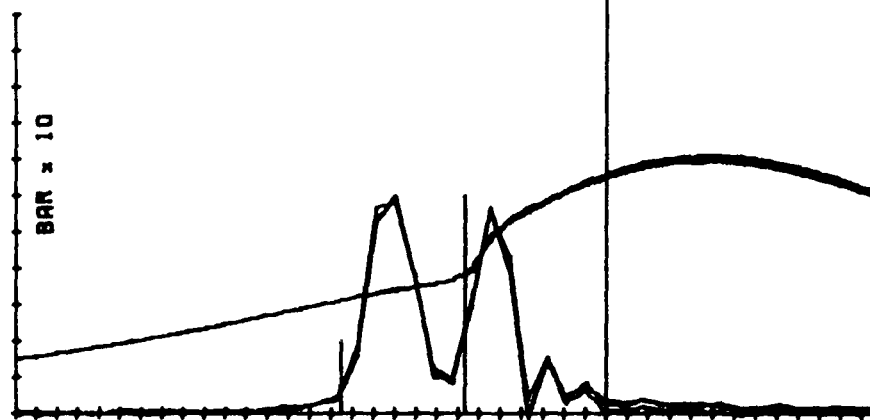


AVERAGE
 TORQUE : 93
 R.P.M. : 634
 START OF
 INJN. : 12.6
 COMON. : 6.7
 DELAY
 DEGREES : 5.9
 μS : 1.172
 MAXIMUM
 PRESSURE: 70.4
 RATE : 6.3
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 185

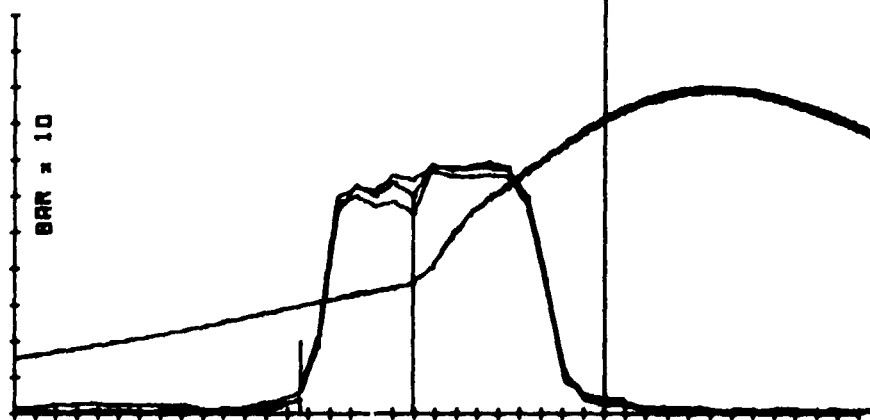

AVERAGE
 TORQUE : 155
 R.P.M. : 638
 START OF
 INJN. : 14.4
 COMON. : 8.1
 DELAY
 DEGREES : 5.3
 μS : 1.052
 MAXIMUM
 PRESSURE: 68
 RATE : 6.5
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 322


DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2660	C.V. : 42.75
TEST ID. : UNID016	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP110	

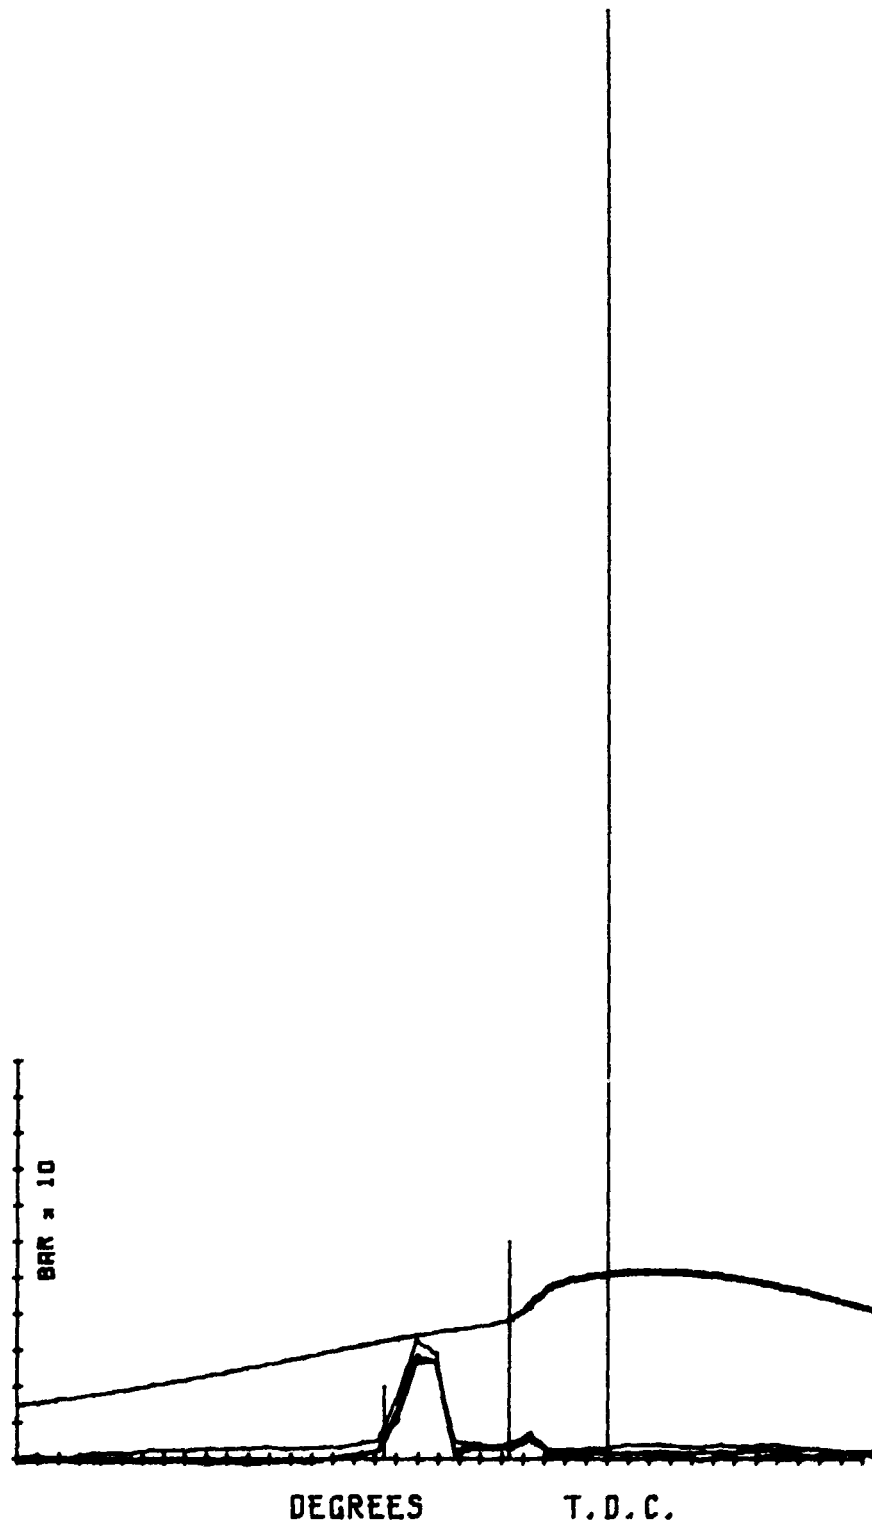


AVERAGE
 TORQUE : 3
 R.P.M. : 613
 START OF
 INJN. : 10.6
 COMMON. : 4.6
 DELAY
 DEGREES : 6
 MS : 1.215
 MAXIMUM
 PRESSURE: 51.7
 RATE : 4.9
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 93


ENGINE : FORD 3000	FUEL ID : DIST 100
CAPACITY : 2860	C.V. : 42.75
TEST ID. : UNID016	DENSITY : .849
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP111

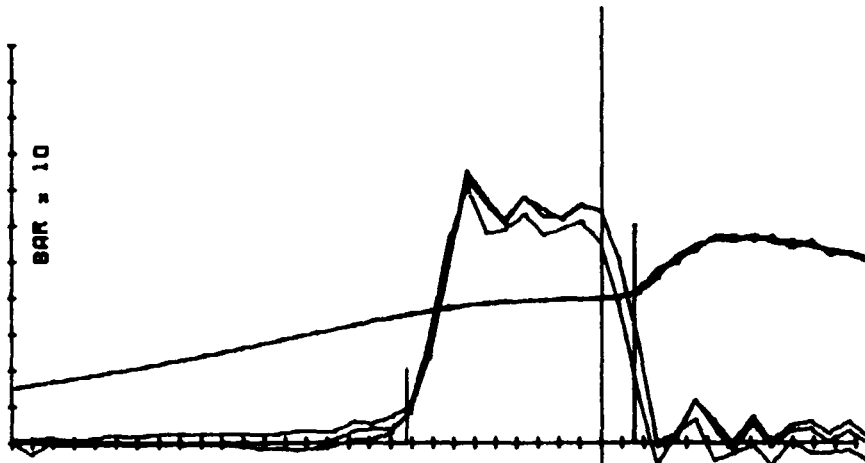

AVERAGE
 TORQUE : 37
 R.P.M. : 2001
 START OF
 INJN. : 9.3
 COMBN. : -1.6
 DELAY
 DEGREES : 10.8
 MS : .075
 MAXIMUM
 PRESSURE: 57.1
 RATE : 5.7
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 165

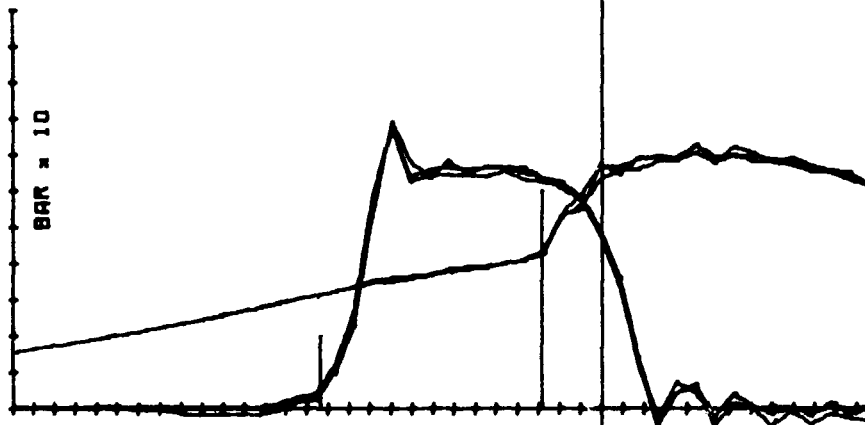


AVERAGE
 TORQUE : 80
 R.P.M. : 2024
 START OF
 INJN. : 13.4
 COMBN. : 2.8
 DELAY
 DEGREES : 10.8
 MS : .07
 MAXIMUM
 PRESSURE: 72.1
 RATE : 10.1
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 270

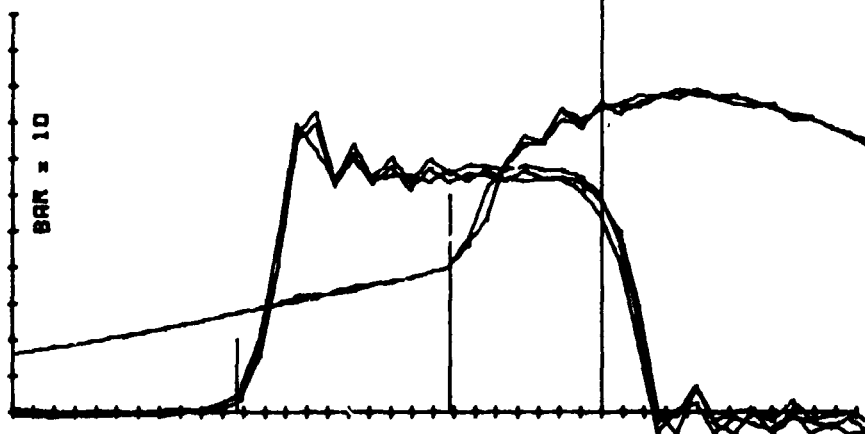

AVERAGE
 TORQUE : 142
 R.P.M. : 2040
 START OF
 INJN. : 17.3
 COMBN. : 7.2
 DELAY
 DEGREES : 10.1
 MS : .028
 MAXIMUM
 PRESSURE: 68.3
 RATE : 13.8
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 372

DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E25/3.9TEGDN
CAPACITY : 2860	C.V. : 37.66
TEST ID. : UNID017	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	FIG AP112

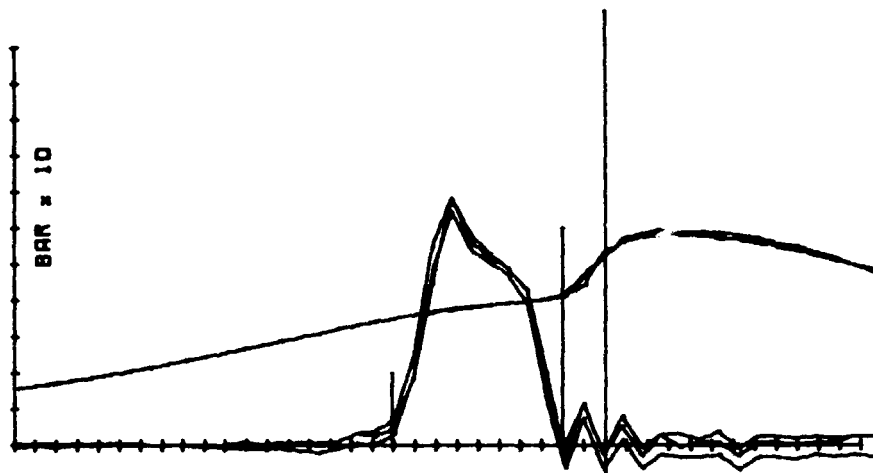

AVERAGE
 TORQUE : 34
 R.P.M. : 1424
 START OF
 INJN. : 10.1
 COMMON. : 2
 DELAY
 DEGREES : 6.1
 MS : .948
 MAXIMUM
 PRESSURE: 56.9
 RATE : 6.5
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 145




AVERAGE
 TORQUE : 69
 R.P.M. : 1426
 START OF
 INJN. : 15.1
 COMMON. : 6.6
 DELAY
 DEGREES : 6.3
 MS : .989
 MAXIMUM
 PRESSURE: 76
 RATE : 8.8
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 221




AVERAGE
 TORQUE : 155
 R.P.M. : 1436
 START OF
 INJN. : 18.5
 COMMON. : 10.9
 DELAY
 DEGREES : 6.6
 MS : .988
 MAXIMUM
 PRESSURE: 84.8
 RATE : 12.6
 TEMPERATURES
 AIR INLET: 30
 EXHAUST : 388

DEGREES T.D.C.


ENGINE : FORD 3000	FUEL ID : E25/3.9TEGDN
CAPACITY : 2660	C.V. : 37.66
TEST ID. : UN10017	DENSITY : .648
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP113	

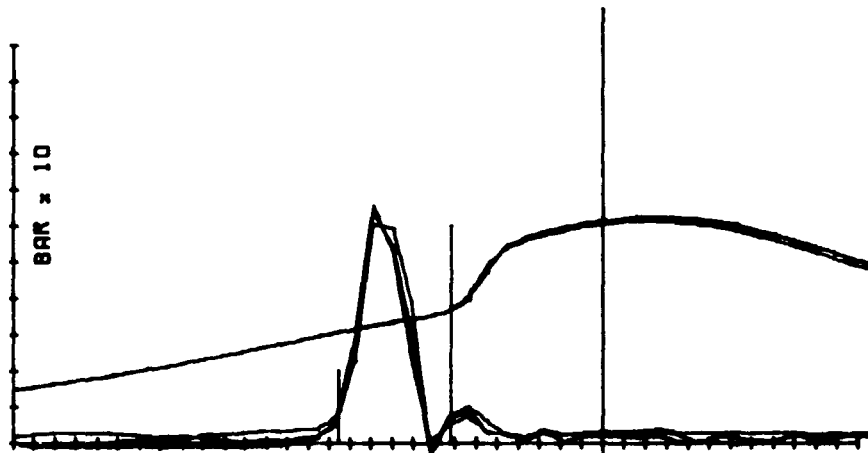

AVERAGE
 TORQUE : 36
 R.P.M. : 607
 START OF
 INJN. : 12.5
 COMB. : 7.1
 DELAY
 DEGREES : 5.4
 μS : 1.113
 MAXIMUM
 PRESSURE: 62
 RATE : 6.6
 TEMPERATURES
 AIR INLET: 26
 EXHAUST : 122

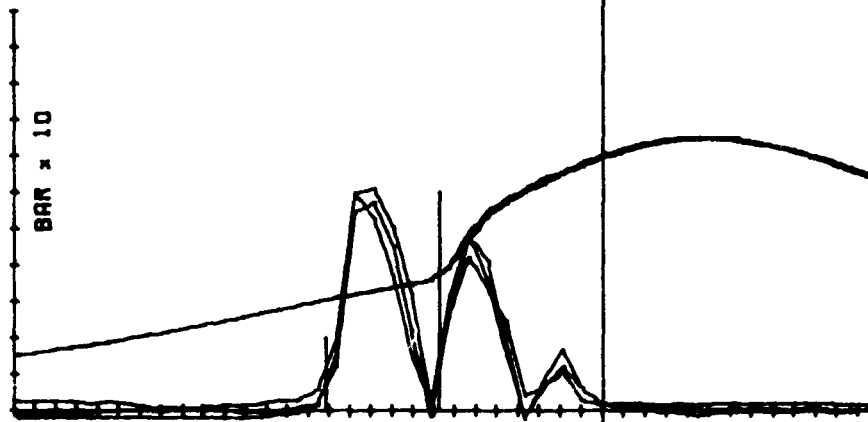


AVERAGE
 TORQUE : 69
 R.P.M. : 613
 START OF
 INJN. : 13.2
 COMB. : 7.7
 DELAY
 DEGREES : 5.5
 μS : 1.11
 MAXIMUM
 PRESSURE: 74.9
 RATE : 6.1
 TEMPERATURES
 AIR INLET: 27
 EXHAUST : 190

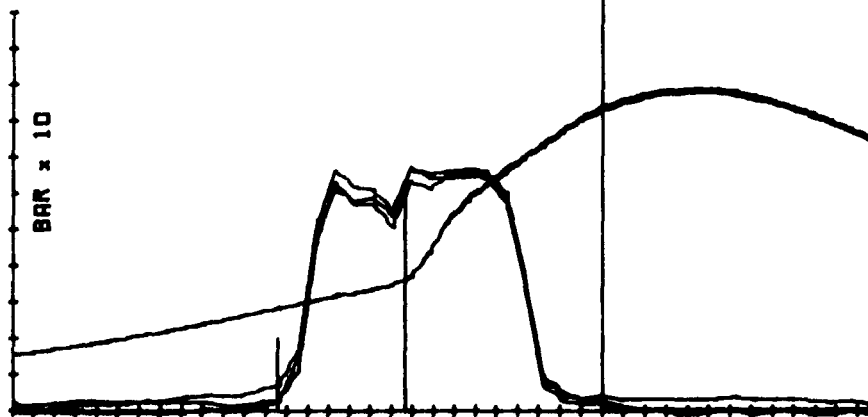

AVERAGE
 TORQUE : 146
 R.P.M. : 633
 START OF
 INJN. : 15.4
 COMB. : 8.3
 DELAY
 DEGREES : 6.1
 μS : 1.216
 MAXIMUM
 PRESSURE: 69.1
 RATE : 6.1
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 306




DEGREES T.D.C.

ENGINE : FORD 3000	FUEL ID : E25/3.9TEGDN
CAPACITY : 2660	C.V. : 37.66
TEST ID. : UNID017	DENSITY : .648
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP114	



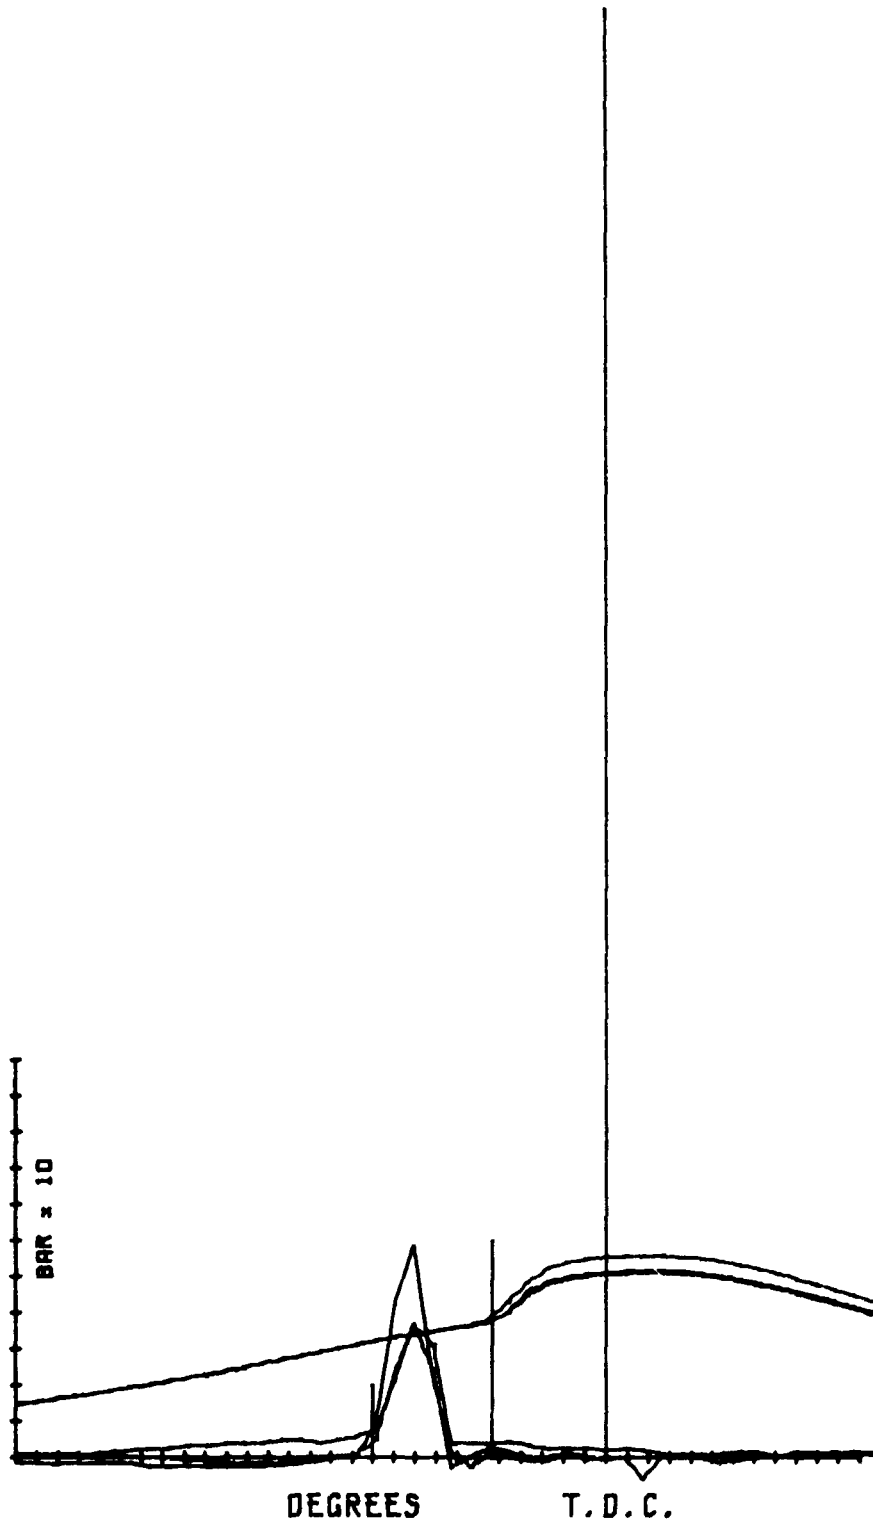


AVERAGE
 TORQUE : 3
 R.P.M. : 608
 START OF
 INJN. : 11
 COMON. : 5.3
 DELAY
 DEGREES : 5.7
 MS : 1.178
 MAXIMUM
 PRESSURE: 53.8
 RATE : 5.5
 TEMPERATURES
 AIR INLET: 28
 EXHAUST : 82


ENGINE : FORD 3000	FUEL ID : E25/3.9TEGDN
CAPACITY : 2860	C.V. : 37.66
TEST ID. : UNID017	DENSITY : .848
REPEATABILITY OF NEEDLE LIFT AND CYLINDER PRESSURE	
FIG AP115	

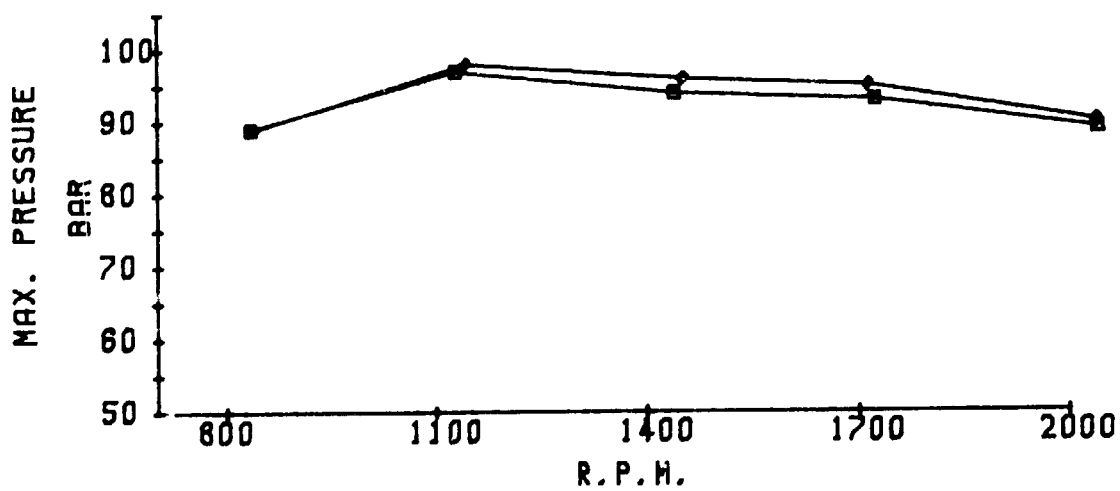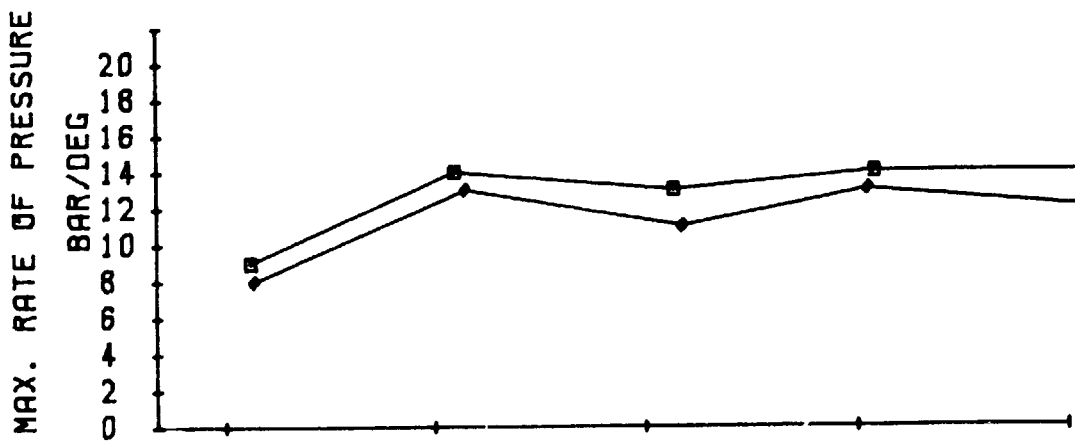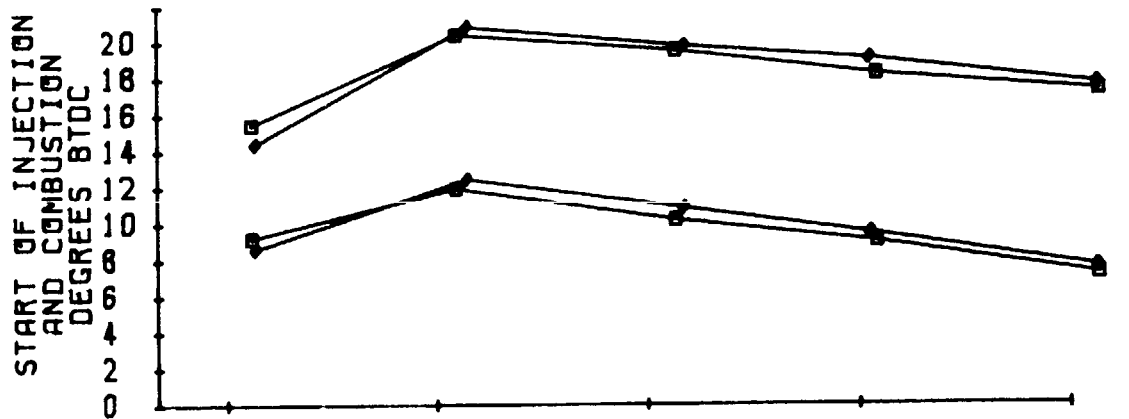


ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E25/3.9TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	18 deg BTDC FULL LOAD
	FIG AP116

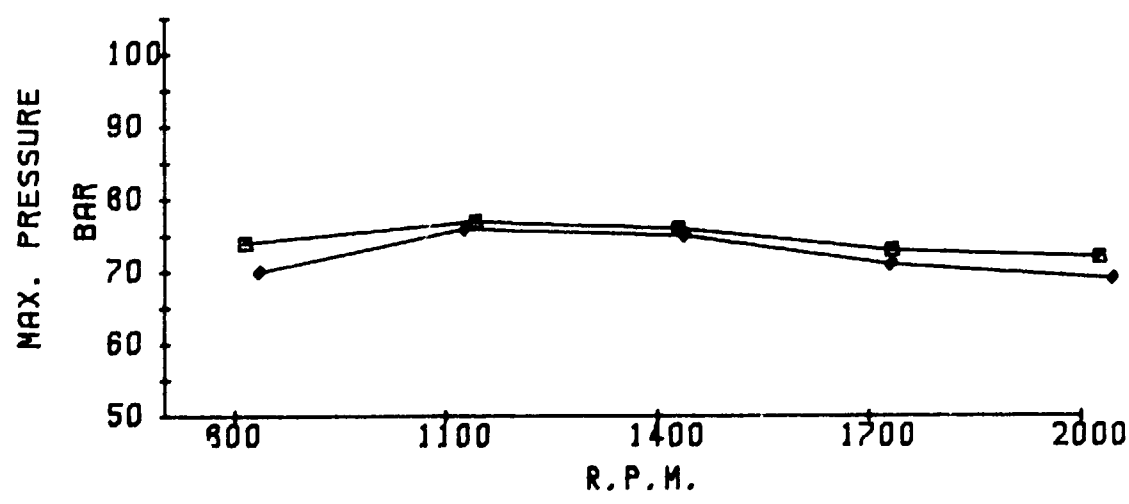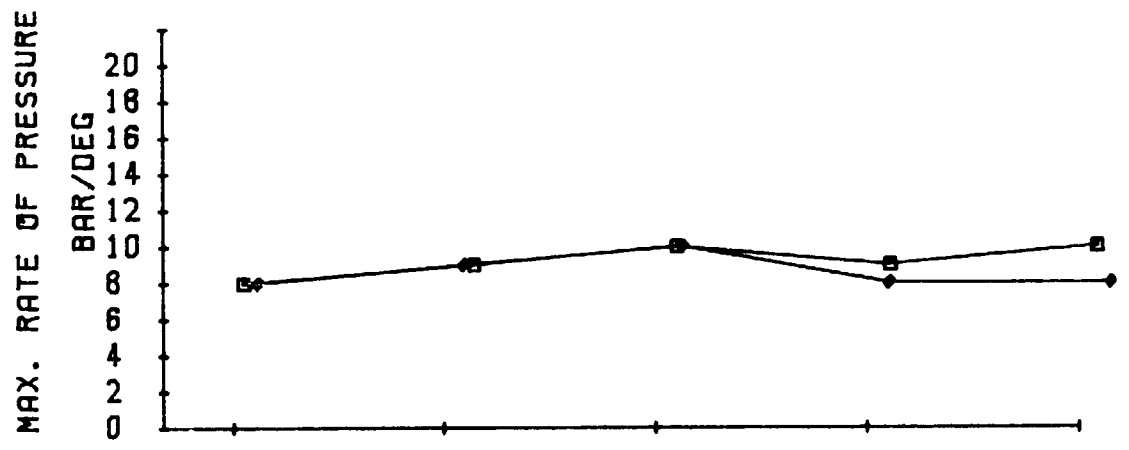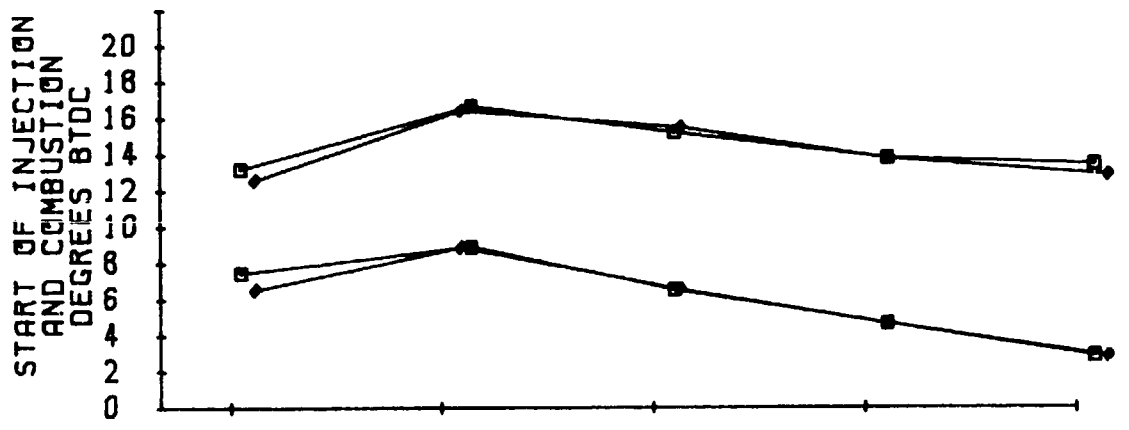

ENGINE : FORD 3000 CAPACITY: 2860	• DIST 100 ■ E25/3.9TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	18 deg BTDC 2/3 LOAD
	FIG AP117

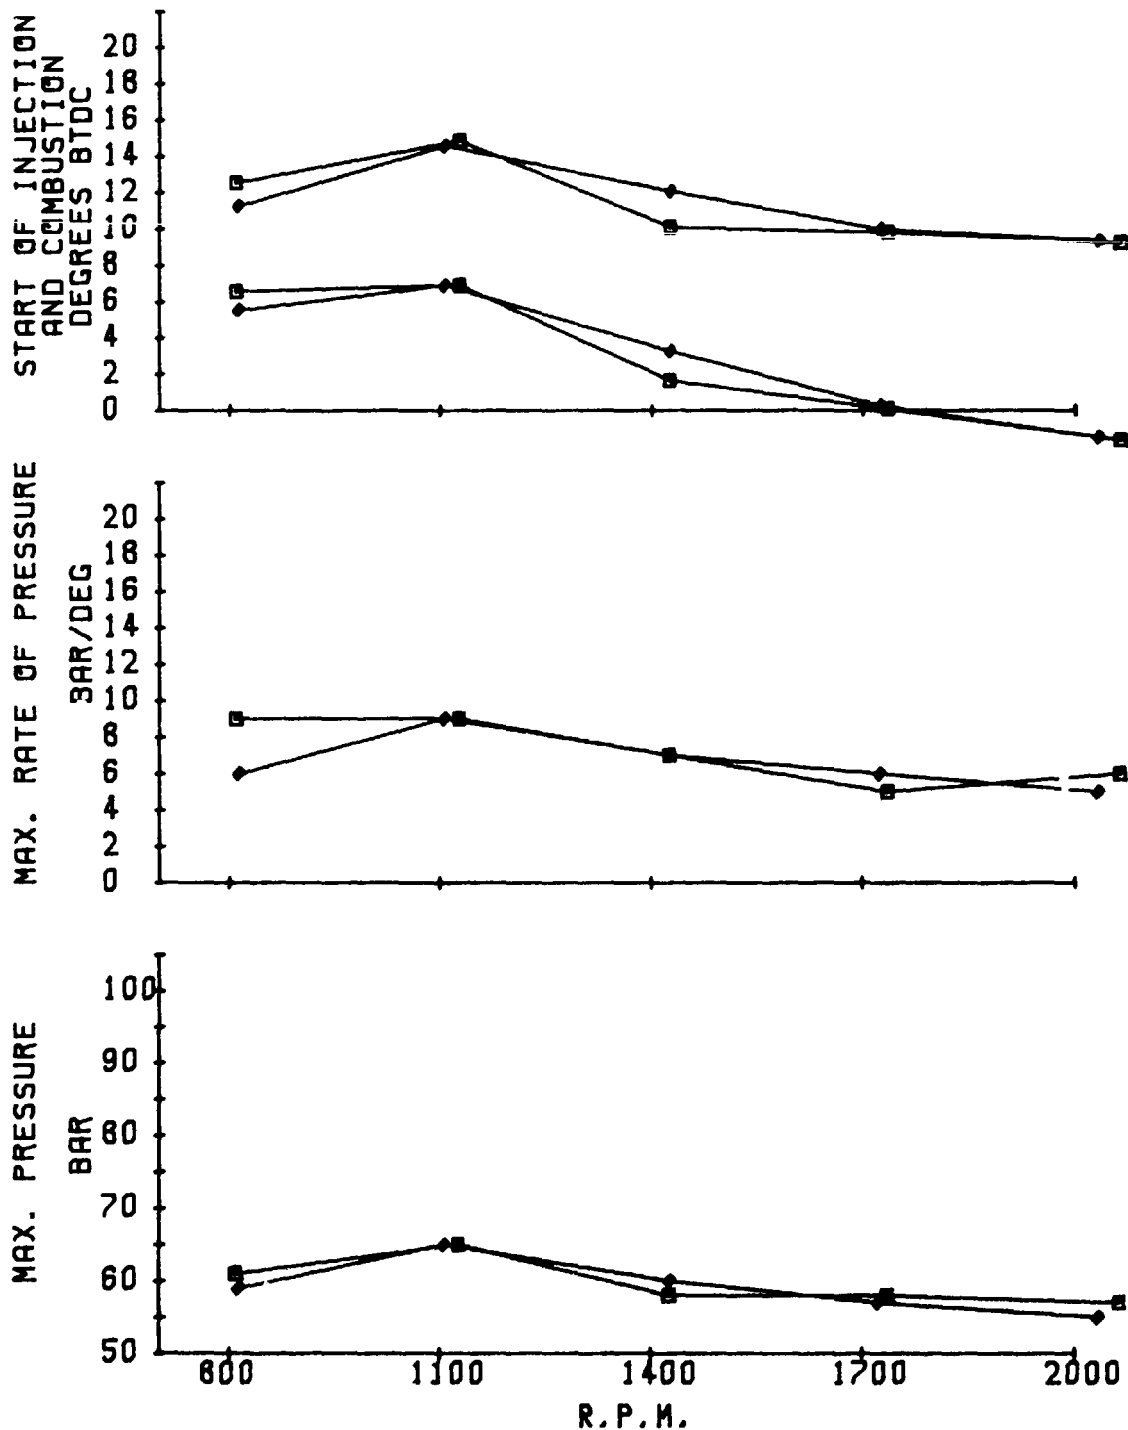

ENGINE : FORD 3000 CAPACITY: 2860	• DIST 100 ■ E25/3.9TEGDN
EFFECT OF TEGDN ON START OF: INJECTION, COMBUSTION, MAX. PRESSURE & PRESSURE RATE	18 deg BTDC 1/3 LOAD
	FIG AP118

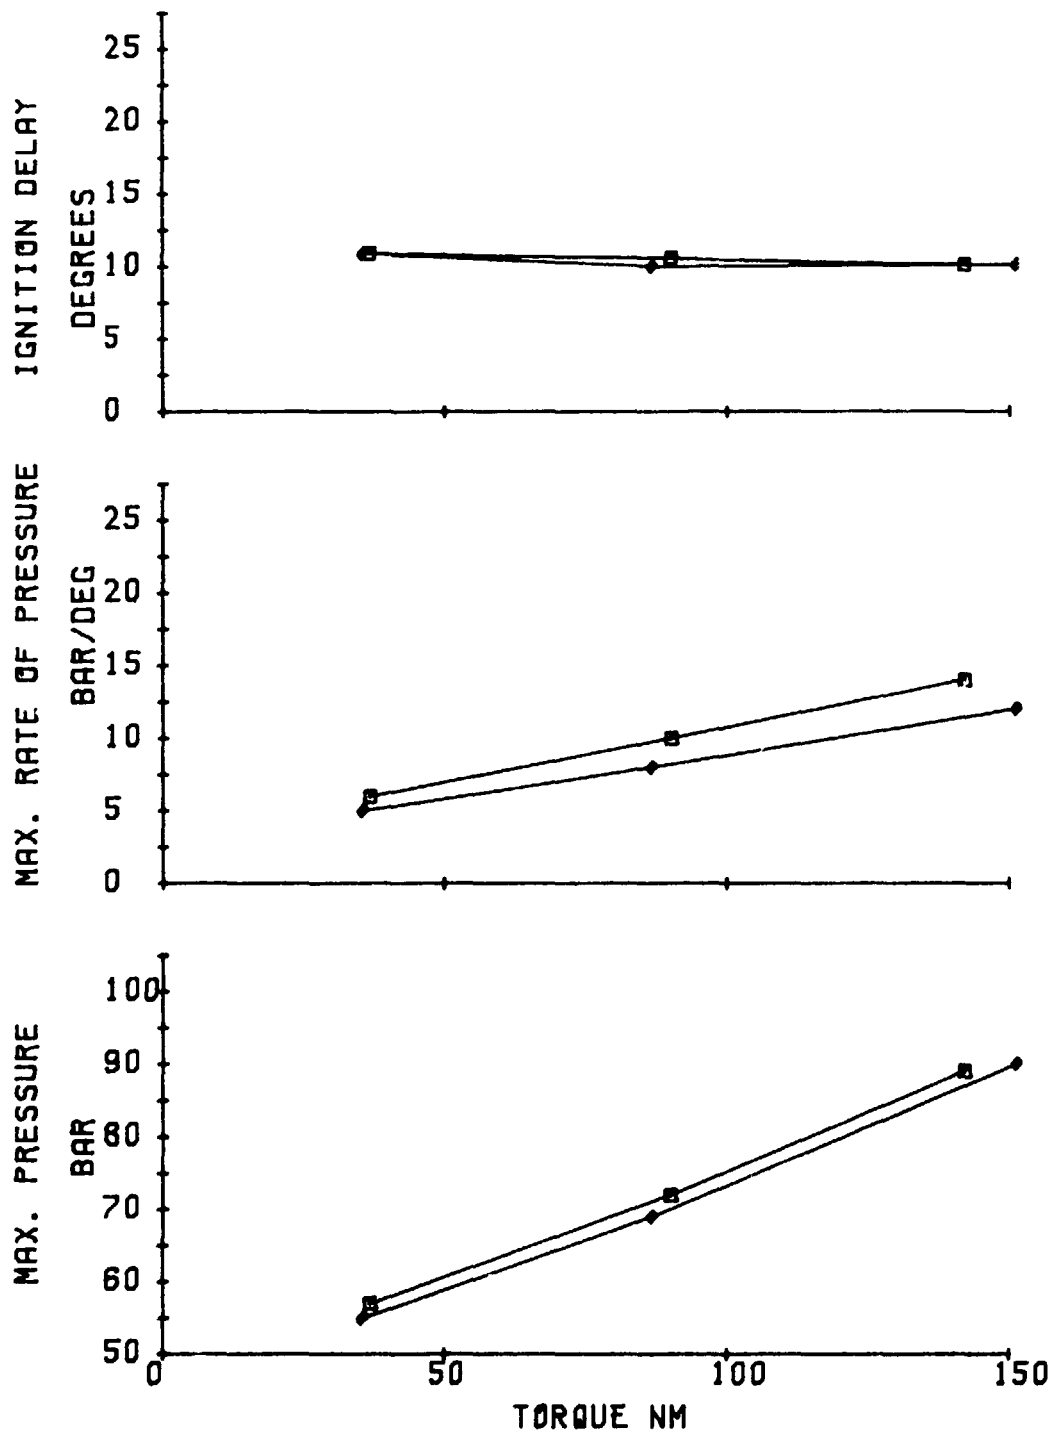




ENGINE : FORD 3000
CAPACITY: 2860

◆ DIST 100
■ E25/3.9TEGDN


EFFECT OF TEGDN ON
IGNITION DELAY,
MAX. PRESSURE & PRESSURE RATE

18 deg BTDC
2000 R.P.M.

FIG AP119

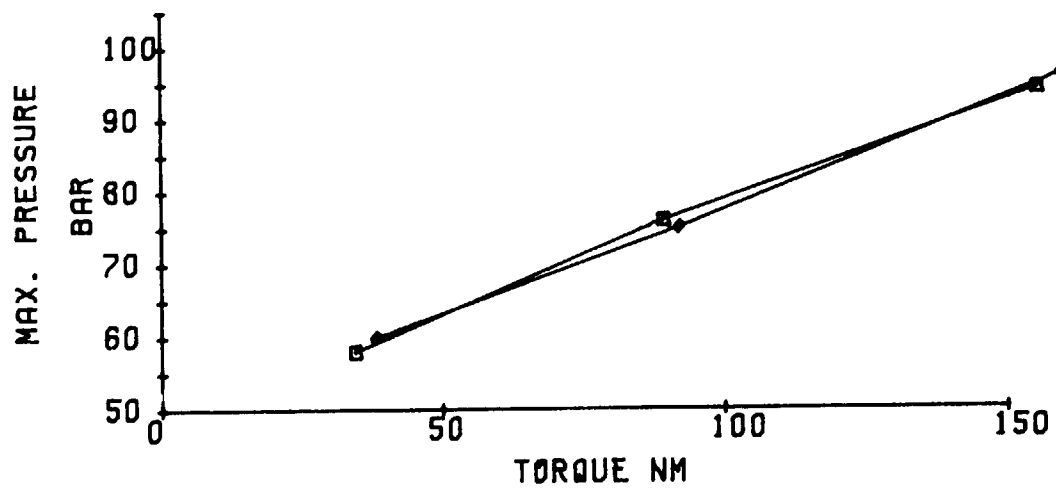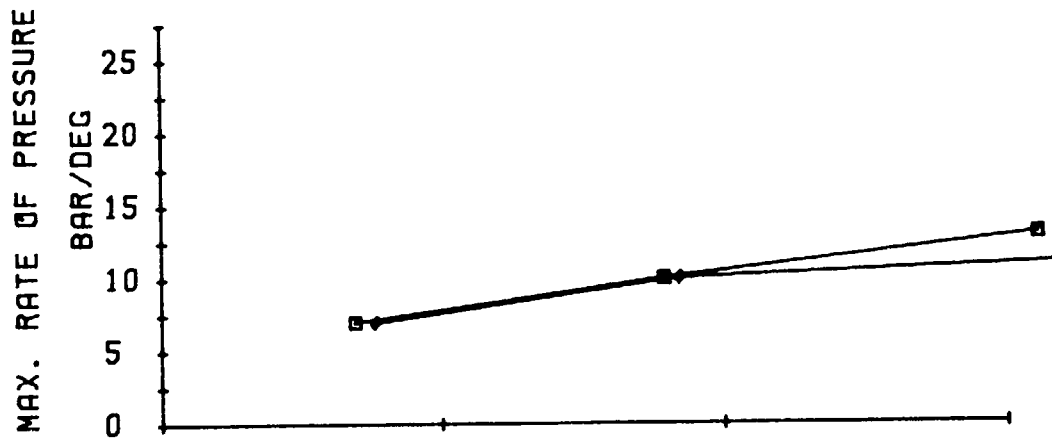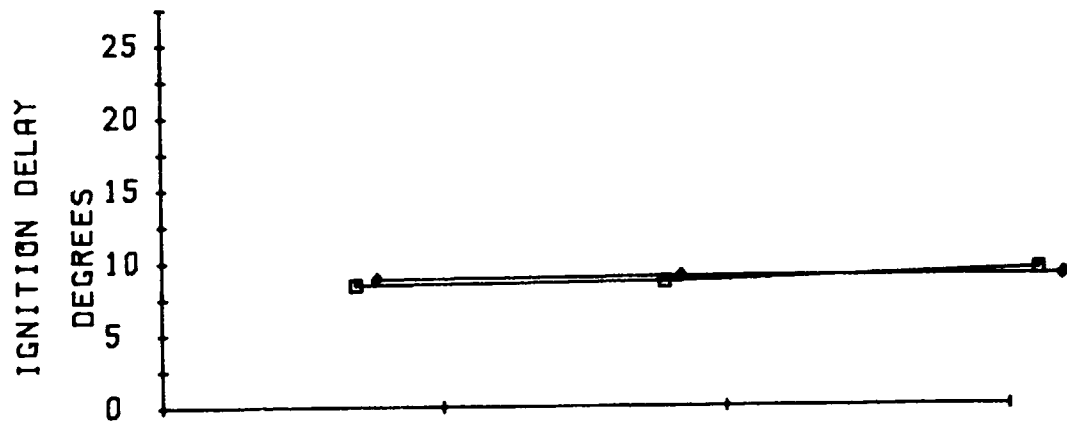

ENGINE : FORD 3000 CAPACITY: 2860	◆ DIST 100 ■ E25/3.9TEGDN
EFFECT OF TEGDN ON IGNITION DELAY, MAX. PRESSURE & PRESSURE RATE	18 deg BTDC 1400 R.P.M.
	FIG AP120

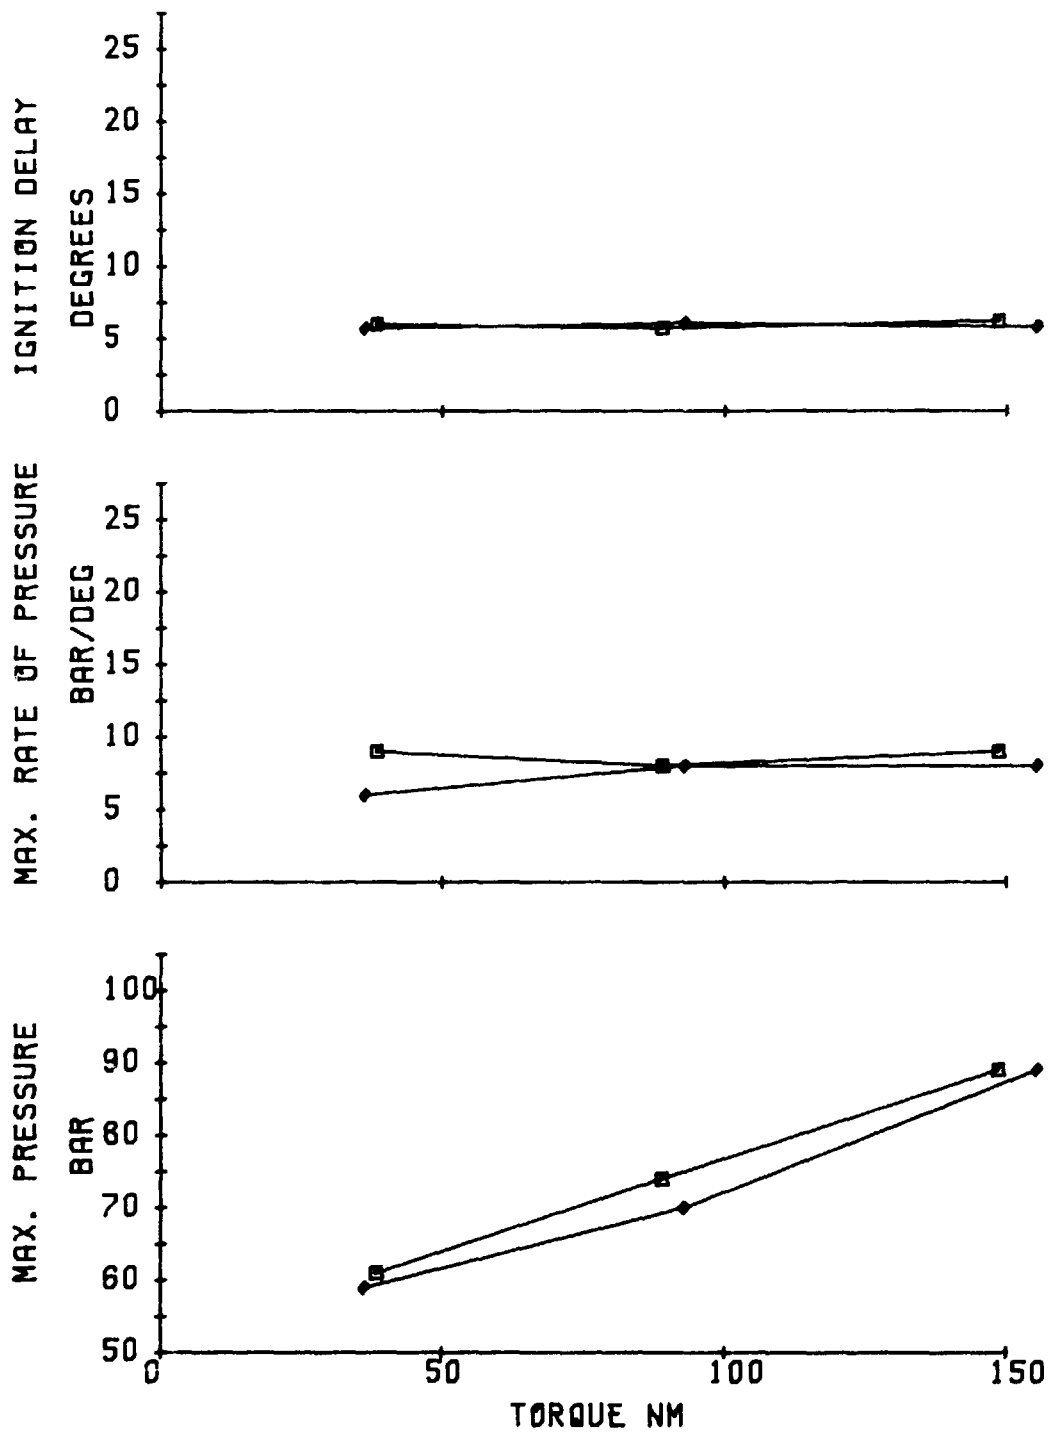


ENGINE : FORD 3000
CAPACITY: 2860

◆ DIST 100
■ E25/3.9TEGDN

EFFECT OF TEGDN ON
IGNITION DELAY,
MAX. PRESSURE & PRESSURE RATE

18 deg BTDC
800 R.P.M.

FIG AP121

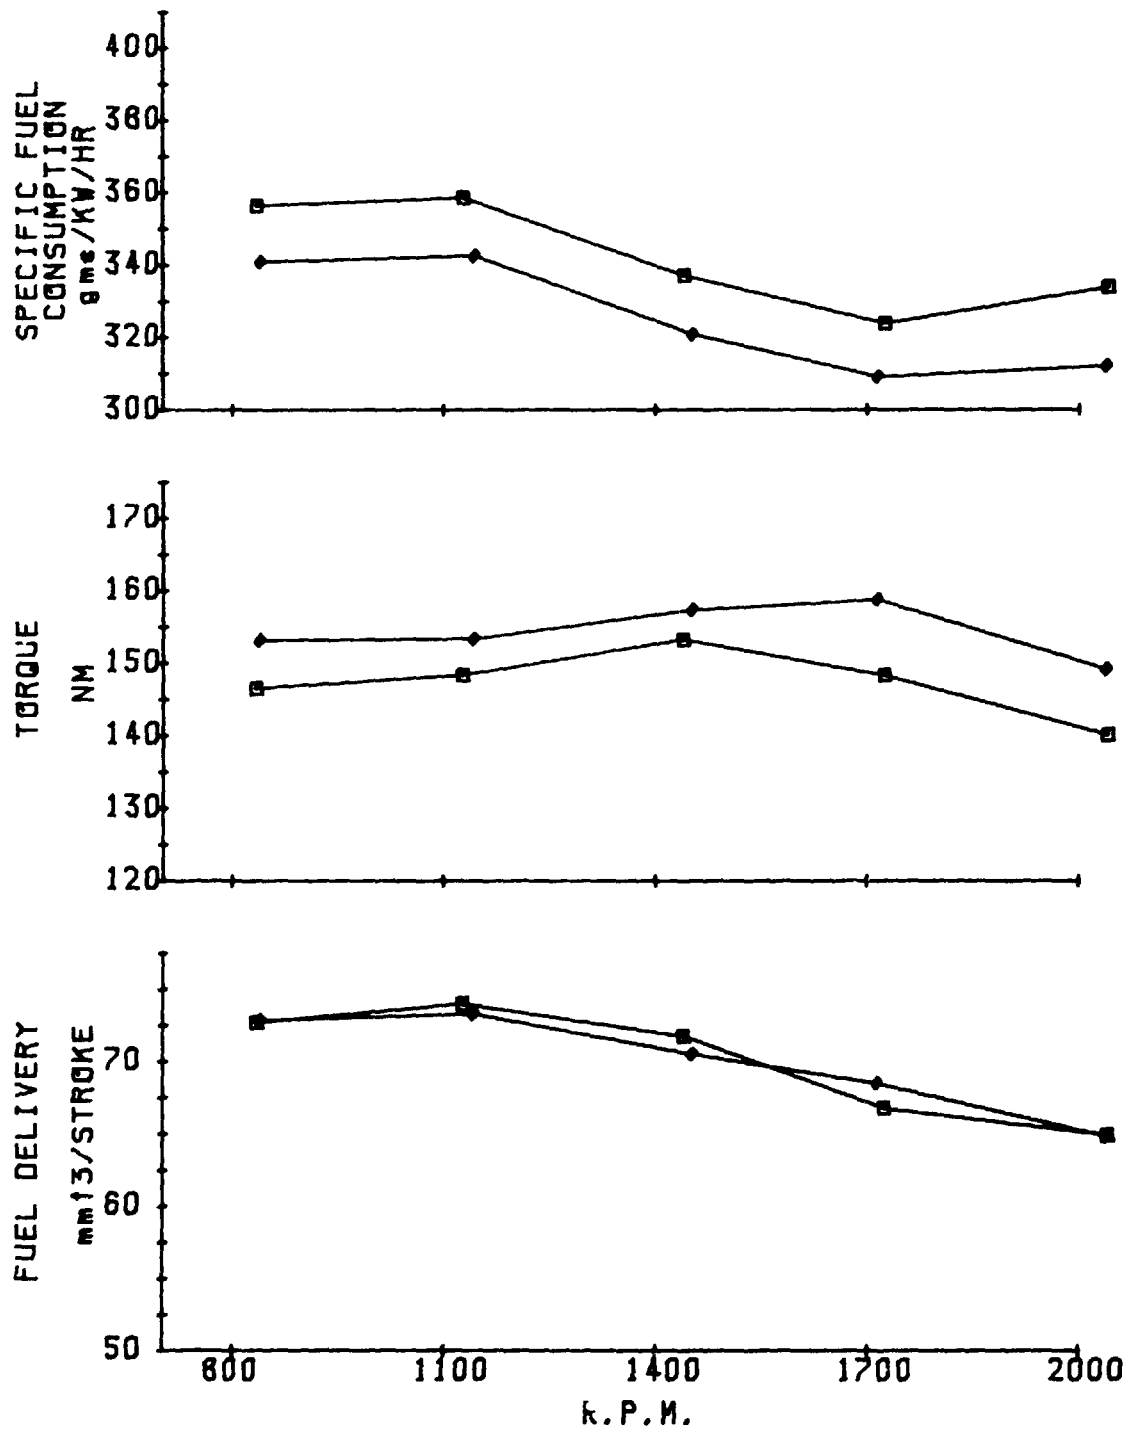


ENGINE : FORL 3000
CAPACITY: 2860

• DIST 100
■ E25/3.9TEGDN

EFFECT OF E25/3.9 TEGDN EMULSION ON
INJECTION PUMP DELIVERY,
TORQUE & S.F.C.

18 deg BTDC
FULL LOAD

FIG AP122

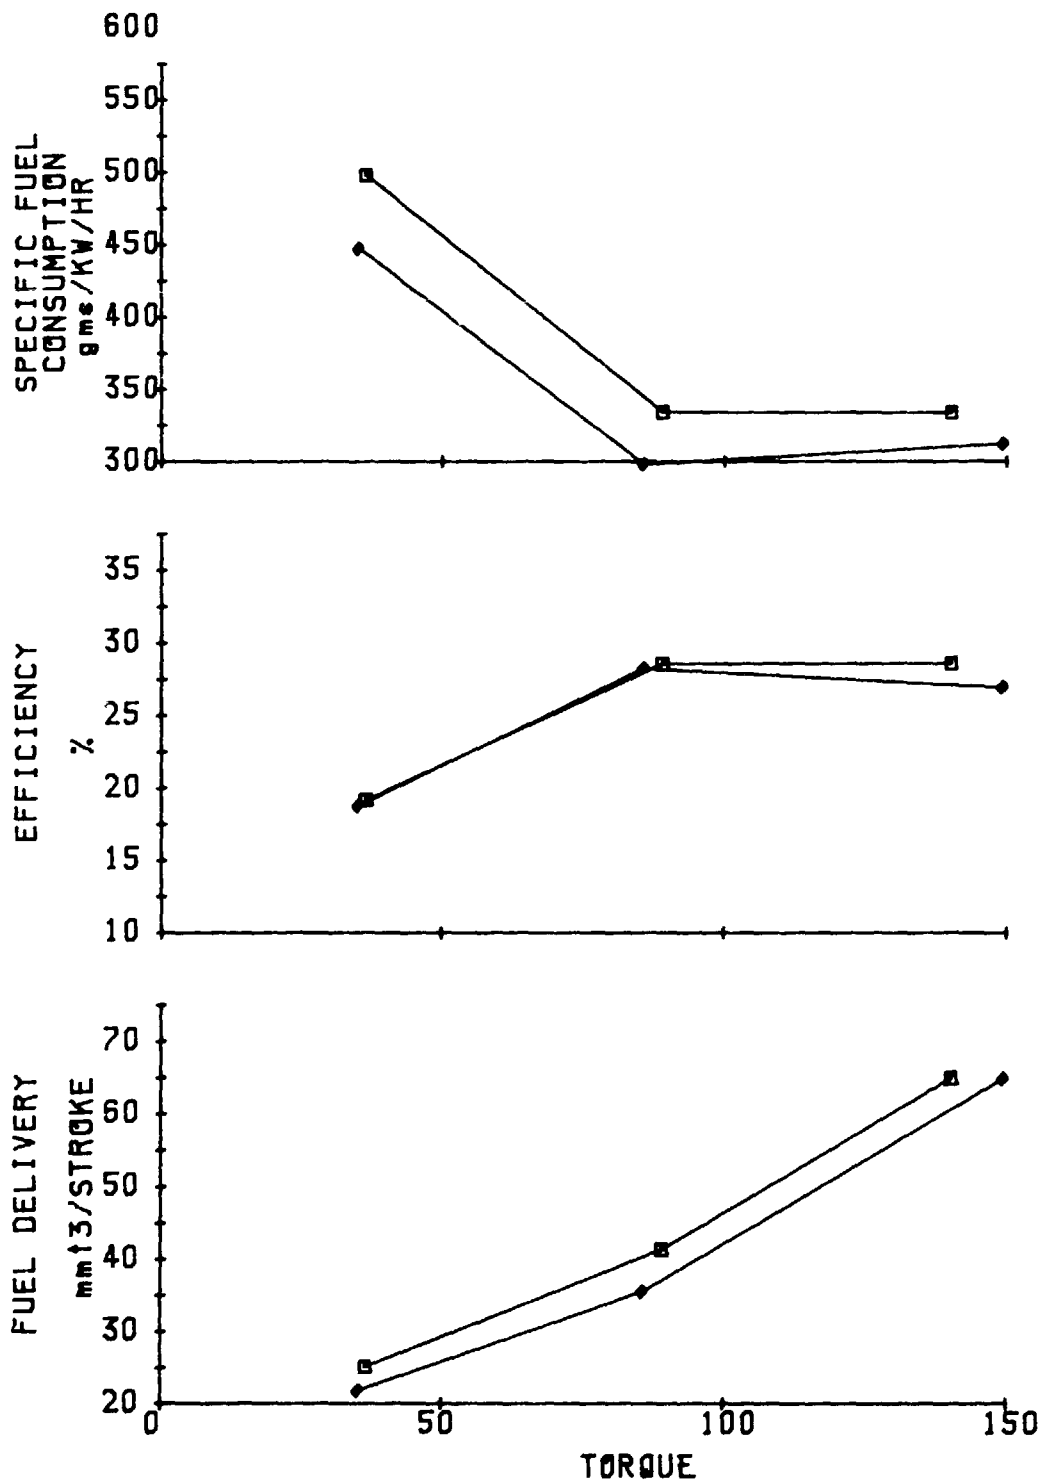


ENGINE : FORD 3000
CAPACITY: 2860

• DIST 100
□ E25/3.9TEGDN

EFFECT OF E25/3.9TEGDN EMULSION ON
INJECTION PUMP DELIVERY,
EFFICIENCY & S.F.C.

18 deg BTDC
2000 R.P.M.

FIG AP123

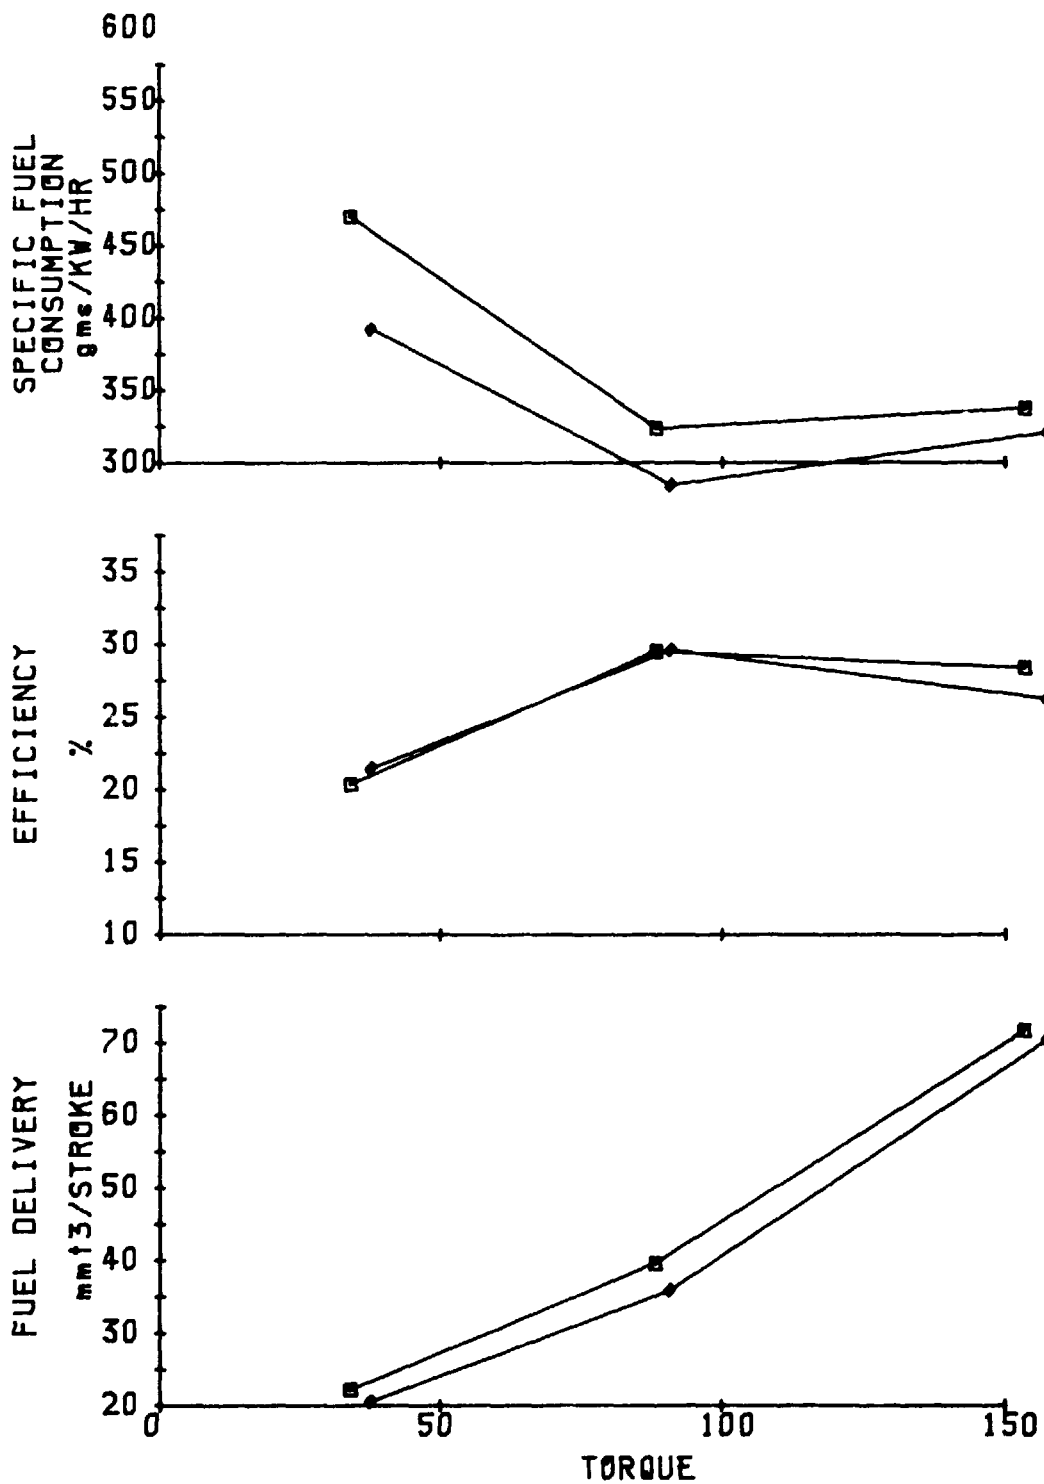


ENGINE : FORD 3000
CAPACITY: 2860

EFFECT OF E25/3.9TEGDN EMULSION ON
INJECTION PUMP DELIVERY,
EFFICIENCY & S.F.C.

• DIST 100
■ E25/3.9TEGDN

18 deg BTDC
1400 R.P.M.

FIG AP124

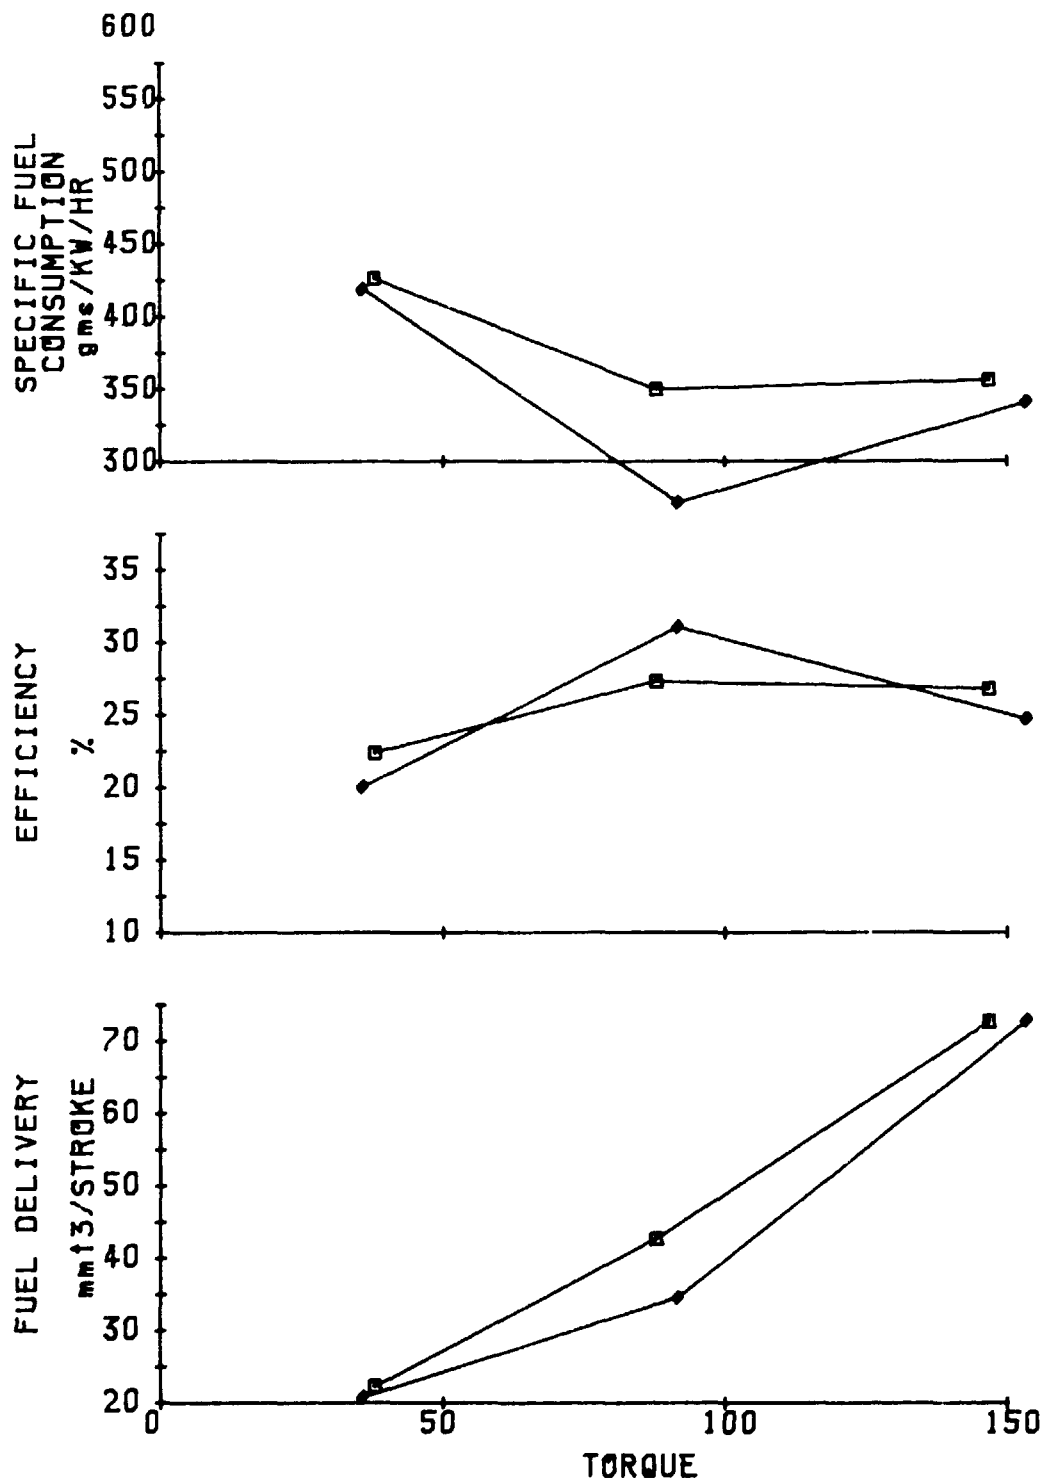

ENGINE : FORD 3000 CAPACITY: 2860	• DIST 100 ■ E25/3.9TEGDN
EFFECT OF E25/3.9TEGDN EMULSION ON INJECTION PUMP DELIVERY, EFFICIENCY & S.F.C.	18 deg BTDC 800 R.P.M. FIG AP125

APPENDIX 2

=====

Tables of Engine Test Results.

Page	Fuel	Load (nominal)	Speed rpm	Timing deg. BDC	Test ID
1	DIST 100	FULL	ALL	20	UNIDO_0
2	"	2/3	"	"	"
3	"	1/3	"	"	"
4	"	IDLE	800	"	"
5	E20	FULL	ALL	"	UNIDO_1
6	"	2/3	"	"	"
7	"	1/3	"	"	"
8	"	IDLE	800	"	"
9	E20/2.6TEGDN	FULL	ALL	"	UNIDO_2
10	"	2/3	"	"	"
11	"	1/3	"	"	"
12	"	IDLE	800	"	"
13	E20/5.2TEGDN	FULL	ALL	"	UNIDO_4
14	"	2/3	"	"	"
15	"	1/3	"	"	"
16	"	IDLE	800	"	"
17	E20/0.2ION	FULL	ALL	"	UNIDO_5
18	"	2/3	"	"	"
19	"	1/3	"	"	"
20	"	IDLE	800	"	"
21	E20/0.4ION	FULL	ALL	"	UNIDO_6
22	"	2/3	"	"	"
23	"	1/3	"	"	"
24	"	IDLE	800	"	"
25	DIST 100	FULL	ALL	"	UNIDO10
26	"	2/3	"	"	"
27	"	1/3	"	"	"
28	"	IDLE	800	"	"
29	"	FULL	ALL	26	UNIDO11
30	"	2/3	"	"	"
31	"	1/3	"	"	"
32	"	IDLE	800	"	"
33	"	FULL	ALL	14	UNIDO12
34	"	2/3	"	"	"
35	"	1/3	"	"	"
36	"	IDLE	800	"	"

APPENDIX 2

=====

Tables of Engine Test Results.

Page	Fuel	Load (nominal)	Speed rpm	Timing deg. BDC	Test ID
37	E20/3.9TEGDN	FULL	ALL	14	UNIDO13
38	"	2/3	"	"	"
39	"	1/3	"	"	"
40	"	IDLE	800	"	"
41	"	FULL	ALL	20	UNIDO14
42	"	2/3	"	"	"
43	"	1/3	"	"	"
44	"	IDLE	800	"	"
45	"	FULL	ALL	26	UNIDO15
46	"	2/3	"	"	"
47	"	1/3	"	"	"
48	"	IDLE	800	"	"
49	DIST 100	FULL	ALL	18	UNIDO16
50	"	2/3	"	"	"
51	"	1/3	"	"	"
52	"	IDLE	800	"	"
53	E25/3.9TEGDN	FULL	ALL	"	UNIDO17
54	"	2/3	"	"	"
55	"	1/3	"	"	"
56	"	IDLE	800	"	"

ENGINE TEST RESULTS

PAGE 1

DATE 02/5/85
TEST ID UNID00ENGINE
MAKE FORD
MODEL 3000
No CYL 3
CAPACITY cc 2860FUEL
DISTILLATE
DENSITY Kg/l 0.849
CAL VALUE MJ/Kg 40.75

DYN TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		100 % LOAD (Nominal)		20 deg BTDC		
Observed load	N	17.48	19.08	18.47	18.28	18.46
Observed torque	NM	139.9	146.8	147.9	146.4	147.8
Observed speed	RPM	2010	1744	1453	1149	843
Observed power	KW	29.4	26.7	22.5	17.6	13.1
Air temperature	deg C	31.0	31.0	31.0	31.0	31.0
Barometric pressure	mBar	1020.5	1020.5	1020.3	1020.3	1020.3
Correction factor		0.993	0.993	0.994	0.994	0.994
Corrected torque	NM	139.0	145.4	146.9	145.4	146.8
Corrected power	KW	29.3	26.5	22.3	17.5	13.0
Fuel consumed	gms	79.7	84.3	87.1	88.2	88.3
Measurement time	seconds	30.390	34.790	41.590	52.590	71.580
Fuel mass flow	gms/sec	2.62	2.42	2.09	1.70	1.23
B.S.F.C.	gms/KW/hr	322.7	329.6	337.3	348.9	342.5
Thermal efficiency	%	26.1	25.6	25.0	24.1	24.6
Fuel temperature	deg C	42.0	42.0	42.0	42.0	42.0
Pump delivery/stroke	mm ³ /mqms	63.3	67.4	69.9	71.6	70.9
		52.2	55.6	57.7	59.1	58.5
Start of injection deg.	max	20.3	21.9	22.8	22.7	18.4
	min	20.1	21.1	22.6	21.8	15.7
	mean	20.2	21.4	22.7	22.1	16.2
Start of combustion deg.	max	9.3	11.8	12.7	13.7	10.3
	min	9.1	10.8	12.6	13.6	10.0
	mean	9.1	11.1	12.6	13.6	10.1
Ignition delay deg.	max	11.2	11.0	10.2	9.0	6.2
	min	11.0	10.0	10.0	8.2	5.7
	mean	11.1	10.3	10.1	8.4	6.1
Ignition delay ms	max	0.931	1.055	1.165	1.312	1.234
	min	0.913	0.960	1.147	1.189	1.122
	mean	0.922	0.989	1.154	1.225	1.202
Max. cylinder pressure	bar	90.5	95.1	96.2	95.2	88.0
Max. pressure rise	bar/deg	14.8	15.9	15.1	13.2	9.6
	bar/ms	178.6	168.3	131.3	91.3	48.4
Oil temperature	deg C	93.0	84.0	85.0	88.0	84.0
Water IN temperature	deg C	49.0	47.0	48.0	49.0	49.0
Water OUT temperature	deg C	83.0	82.0	81.0	83.0	82.0
Exhaust temperature	deg C	27.0	41.0	40.0	39.0	37.0

ENGINE TEST RESULTS

PAGE 2

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 22/5/85
TEST ID : UNID0_0

DYN0 TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	67 % LOAD (Nominal)		20 deg BTDC			
Observed load	NM	11.08	10.85	11.08	11.17	
Observed torque	NM	88.6	86.9	88.7	89.4	
Observed speed	RPM	2029	1754	1459	809	
Observed power	KW	18.8	16.0	13.6	7.6	
Air temperature	deg C	31.0	31.0	31.0	31.0	
Barometric pressure	mBar	1020.3	1020.3	1020.3	1020.1	
Correction factor		0.994	0.994	0.994	0.994	
Corrected torque	NM	88.0	86.3	88.2	88.8	
Corrected power	KW	18.7	15.8	13.5	7.5	
Fuel consumed	gms	46.6	44.8	45.0	46.5	
Measurement time	seconds	29.990	34.590	41.590	53.190	
Fuel mass flow	gms/sec	1.55	1.30	1.08	0.87	
B.S.F.C.	gms/KW/hr	299.2	294.2	289.2	296.0	
Thermal efficiency	%	28.1	28.6	29.1	28.4	
Fuel temperature	deg C	41.0	42.0	42.0	42.0	
Pump delivery/stroke	mm ³	37.1	35.8	36.0	37.2	
	mgms	30.6	29.5	29.7	30.7	
Start of injection deg.	max	15.8	16.6	17.5	19.1	
	min	15.5	16.5	17.3	18.5	
	mean	15.7	16.5	17.4	19.0	
Start of combustion deg.	max	5.5	6.6	9.0	11.1	
	min	4.6	6.4	8.3	10.9	
	mean	5.1	6.5	8.5	11.0	
Ignition delay	deg	max	11.2	10.2	9.1	8.2
	min	10.2	10.0	8.3	7.6	6.2
	mean	10.6	10.0	8.9	8.0	6.2
Ignition delay	ms	max	0.920	0.965	1.044	1.196
	min	0.836	0.946	0.953	1.107	1.275
	mean	0.867	0.951	1.022	1.165	1.287
Max. cylinder pressure	bar	70.4	73.5	75.4	79.3	
Max. pressure rise	bar/deg	10.3	10.3	10.5	12.7	
	bar/ms	125.6	108.7	92.0	87.1	
Oil temperature	deg C	95.0	95.0	92.0	89.0	
Water IN temperature	deg C	55.0	50.0	48.0	56.0	
Water OUT temperature	deg C	79.0	77.0	77.0	81.0	
Exhaust temperature	deg C	285.0	249.0	233.0	220.0	

ENGINE TEST RESULTS

PAGE 3

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 22/5/85
TEST ID : UNIDO_0

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	33 % LOAD (Nominal)		20 deg BTDC				
Observed load	NM :	4.57	4.41	4.64	4.67	4.88	
Observed torque	NM :	36.6	35.3	37.1	37.4	37.4	
Observed speed	RPM :	2034	1732	1452	1148	818	
Observed power	KW :	7.8	6.4	5.6	4.5	3.2	
Air temperature	deg C :	32.0	31.0	31.0	29.0	31.0	
Barometric pressure	mBar :	1020.1	1020.1	1020.0	1019.9	1019.9	
Correction factor	:	0.995	0.994	0.994	0.991	0.994	
Connected torque	NM :	36.5	35.1	36.9	37.1	37.2	
Connected power	KW :	7.8	6.4	5.6	4.5	3.2	
Fuel consumed	gms :	29.1	27.4	26.6	26.7	29.7	
Measurement time	seconds :	29.790	34.990	41.790	52.620	73.820	
Fuel mass flow	gms/sec :	0.98	0.78	0.64	0.51	0.40	
B.S.F.C.	gms/KW/hr :	452.8	442.6	409.7	410.0	454.5	
Thermal efficiency	% :	18.6	19.0	20.6	20.5	18.5	
Fuel temperature	deg C :	42.0	42.0	41.0	41.0	41.0	
Pump delivery/stroke	mm ³ :	23.3	21.9	21.2	21.4	23.8	
	mgms :	19.2	18.1	17.5	17.7	19.7	
Start of injection deg.	max :	13.8	12.2	14.7	17.4	15.4	
	min :	13.1	12.0	14.7	16.6	14.7	
	mean :	13.3	12.1	14.7	17.0	15.0	
Start of combustion deg.	max :	2.1	2.8	5.6	9.2	8.5	
	min :	1.7	2.2	5.5	8.3	8.3	
	mean :	1.9	2.5	5.6	8.9	8.4	
Ignition delay	deg	max :	11.8	10.1	9.2	8.3	7.1
	min :	11.2	9.3	9.1	7.6	6.4	
	mean :	11.4	9.6	9.2	8.1	6.7	
Ignition delay	ms	max :	0.968	0.970	1.056	1.209	1.440
	min :	0.917	0.890	1.045	1.105	1.298	
	mean :	0.935	0.928	1.051	1.174	1.358	
Max. cylinder pressure	bar :	59.0	58.2	61.4	65.1	64.5	
Max. pressure rise	bar/deg :	6.2	6.1	7.5	9.1	8.2	
	bar/ms :	75.5	63.5	64.9	62.6	40.5	
Oil temperature	deg C :	89.0	89.0	86.0	87.0	82.0	
Water IN temperature	deg C :	51.0	50.0	52.0	51.0	52.0	
Water OUT temperature	deg C :	78.0	78.0	73.0	86.0	75.0	
Exhaust temperature	deg C :	197.0	173.0	154.0	144.0	140.0	

ENGINE TEST RESULTS

PAGE 4

ENGINE
 MAKE FORD
 MODEL 3000
 No CYL 3
 CAPACITY cc 2860

FUEL
 DISTILLATE DIST 100
 DENSITY Kg/l 0.849
 CAL VALUE MJ/Kg 42.75

DATE 22/5/85
 TEST ID UNIDO_0

DYNQ TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)

800

IDLE CONDITION

30 deg BTDC

Observed load	N :	0.32
Observed torque	NM :	2.5
Observed speed	RPM :	820
Observed power	KW :	.2
Air temperature	deg C :	28.0
Barometric pressure	mBar :	1019.9
Correction factor	:	0.989
Corrected torque	NM :	2.5
Corrected power	KW :	.2
Fuel consumed	gms :	14.7
Measurement time	seconds :	73.570
Fuel mass flow	gms/sec :	0.20
B.S.F.C.	gms/KW/hr :	3348.5
Thermal efficiency	% :	2.5
Fuel temperature	deg C :	40.0
Pump delivery/stroke	mm ³ :	11.8
	mgms :	9.7
Start of injection deg.	max :	15.4
	min :	13.8
	mean :	14.6
Start of combustion deg.	max :	8.2
	min :	7.3
	mean :	7.8
Ignition delay	deg max :	7.2
	min :	6.5
	mean :	6.8
Ignition delay	ms max :	1.469
	min :	1.317
	mean :	1.379
Max. cylinder pressure	bar :	55.9
Max. pressure rise	bar/deg :	7.0
	bar/ms :	34.7
Oil temperature	deg C :	78.0
Water IN temperature	deg C :	54.0
Water OUT temperature	deg C :	73.0
Exhaust temperature	deg C :	94.0

ENGINE TEST RESULTS

PAGE 5

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2360

FUEL
EMULSION : E20
DENSITY Kg/l : 0.845
CAL VALUE MJ/Kg : 38.83

DATE : 22/5/85
TEST ID : UNID001

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		100 % LOAD (Nominal)		20 deg BTDC		
Observed load	N :	17.05	18.09	18.52	18.25	18.28
Observed torque	NM :	136.5	144.8	148.3	146.1	146.4
Observed speed	RPM :	2011	1742	1450	1153	849
Observed power	KW :	28.7	26.4	22.5	17.6	13.0
Air temperature	deg C :	31.0	34.0	32.0	31.0	31.0
Barometric pressure	mBar :	1019.8	1019.8	1019.8	1019.8	1019.8
Correction factor	:	0.994	0.999	0.996	0.996	0.994
Corrected torque	NM :	135.7	144.6	147.6	145.4	145.5
Corrected power	KW :	28.6	26.4	22.4	17.6	12.9
Fuel consumed	gms :	79.0	83.4	87.4	89.3	86.3
Measurement time	seconds :	30.400	34.790	41.790	52.590	71.180
Fuel mass flow	gms/sec :	2.60	2.40	2.09	1.70	1.21
B.S.F.C.	gms/KW/hr :	327.5	327.2	335.9	348.0	337.5
Thermal efficiency	% :	28.3	28.3	27.6	26.6	27.5
Fuel temperature	deg C :	37.0	37.0	37.0	38.0	40.0
Pump delivery/stroke	mm+3 :	62.6	66.7	69.9	71.4	69.5
	mgms :	51.7	55.0	57.7	58.9	57.1
Start of injection deg.	max :	20.1	22.0	22.7	23.6	18.1
	min :	20.0	21.1	21.9	22.8	17.4
	mean :	20.0	21.6	22.4	23.3	17.8
Start of combustion deg.	max :	7.3	9.2	10.9	17.0	10.1
	min :	7.2	9.0	10.1	11.8	10.0
	mean :	7.3	9.1	10.7	11.9	10.1
Ignition delay	deg					
	max :	12.8	12.9	11.3	11.8	3.1
	min :	12.7	12.0	11.1	10.9	7.2
	mean :	12.8	12.5	11.6	11.4	7.7
Ignition delay	ms					
	max :	1.060	1.233	1.361	1.701	1.584
	min :	1.052	1.149	1.275	1.575	1.418
	mean :	1.057	1.197	1.337	1.645	1.520
Max. cylinder pressure	bar :	92.7	95.5	97.1	96.4	89.8
Max. pressure rise	bar/deg :	19.5	19.3	22.2	19.6	13.4
	bar/ms :	235.8	202.1	192.9	135.5	68.4
Oil temperature	deg C :	81.0	87.0	91.0	89.0	86.0
Water IN temperature	deg C :	49.0	49.0	49.0	45.0	40.0
Water OUT temperature	deg C :	81.0	81.0	81.0	81.0	81.0
Exhaust temperature	deg C :	458.0	458.0	458.0	442.0	411.0

ENGINE TEST RESULTS

PAGE 1

ENGINE
MAKE FORD
MODEL 3000
No CYL 3
CAPACITY cc 2960

FUEL
EMULSION E20
DENSITY Kg/l 0.845
CAL VALUE MJ/Kg 38.83

DATE 22/5/85
TEST ID UNIDO_1

DYND TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	67 % LOAD (Nominal)		30 deg BTDC		
Observed load N	11.09	11.07	11.07	11.13	11.54
Observed torque NM	88.8	89.7	88.6	89.1	92.4
Observed speed RPM	2042	1754	1444	1132	825
Observed power KW	19.0	16.3	13.4	10.6	8.0
Air temperature deg C	31.0	32.0	32.0	31.0	29.0
Barometric pressure mBar	1019.8	1019.8	1019.8	1019.8	1019.8
Correction factor	0.994	0.996	0.996	0.994	0.991
Corrected torque NM	88.2	88.3	88.3	88.5	91.5
Corrected power KW	18.9	16.2	13.3	10.5	7.9
Fuel consumed gms	51.4	49.6	49.3	51.3	50.8
Measurement time seconds	29.790	34.590	42.000	53.390	73.180
Fuel mass flow gms/sec	1.73	1.43	1.17	0.96	0.69
B.S.F.C. gms/KW/hr	329.2	318.5	316.6	329.7	316.0
Thermal efficiency %	28.2	29.1	29.3	29.1	29.3
Fuel temperature deg C	38.0	42.0	42.0	41.0	40.0
Pump delivery/stroke mm ³	41.0	39.8	39.6	41.3	40.9
mgms	33.8	32.7	32.5	34.0	33.7
Start of injection deg. max	15.8	17.2	18.3	20.0	18.1
min	15.5	16.6	17.3	19.0	17.4
mean	15.6	17.0	17.7	19.3	17.7
Start of combustion deg. max	2.8	5.5	7.3	10.1	10.1
min	2.7	4.6	7.3	9.1	10.0
mean	2.8	5.0	7.3	9.5	10.0
Ignition delay deg. max	13.0	12.3	11.0	10.1	8.0
min	12.7	11.7	10.1	9.1	7.4
mean	12.8	12.0	10.4	9.8	7.6
Ignition delay ms. max	1.057	1.169	1.266	1.485	1.621
min	1.032	1.110	1.161	1.338	1.489
mean	1.042	1.138	1.206	1.445	1.542
Max. cylinder pressure bar	73.1	78.3	78.8	81.2	77.9
Max. pressure rise bar/deg	10.6	14.4	13.7	16.2	12.0
bar/ms	129.9	151.6	119.0	109.9	59.3
Oil temperature deg C	91.0	93.0	91.0	91.0	86.0
Water IN temperature deg C	55.0	51.0	52.0	53.0	56.0
Water OUT temperature deg C	78.0	78.0	78.0	79.0	80.0
Exhaust temperature deg C	278.0	242.0	230.0	218.0	199.0

ENGINE TEST RESULTS

PAGE 7

ENGINE
MAKE FORD
MODEL 3000
No CYL 3
CAPACITY cc 2860

FUEL
EMULSION : E20
DENSITY Kg/l : 0.845
CAL VALUE MJ/Kg : 38.83

DATE 22/5/85
TEST ID UNID001

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	1700	1400	1100	800
	33 % LOAD (Nominal)		20 deg BTDC	
Observed load	N : 4.41	4.37	4.21	4.50
Observed torque	NM : 35.3	35.0	38.5	36.7
Observed speed	RPM : 2029	1729	1436	1145
Observed power	KW : 7.5	6.3	5.8	4.4
Air temperature	deg C : 29.0	29.0	29.0	29.0
Barometric pressure	mBar : 1020.0	1020.0	1020.0	1020.0
Correction factor	: 0.990	0.990	0.990	0.990
Corrected torque	NM : 35.0	34.7	38.2	36.3
Corrected power	KW : 7.4	6.3	5.7	4.4
Fuel consumed	gms : 31.3	29.4	30.3	29.3
Measurement time	seconds : 29.990	35.190	42.190	52.990
Fuel mass flow	gms/sec : 1.04	0.84	0.72	0.55
B.S.F.C.	gms/KW/hr : 506.0	479.4	450.3	457.0
Thermal efficiency	% : 18.3	19.3	20.6	20.3
Fuel temperature	deg C : 36.0	35.0	35.0	37.0
Pump delivery/stroke	mm ³ : 24.9	23.4	24.2	23.4
	mgm : 20.6	19.3	20.0	19.3
Start of injection deg.	max : 13.8	13.1	15.6	18.4
	min : 13.2	12.0	15.0	17.3
	mean : 13.6	12.2	15.4	17.7
Start of combustion deg.	max : -5	1.2	5.6	8.3
	min : -7	1.0	5.4	8.2
	mean : -6	1.1	5.5	8.3
Ignition delay	deg max : 14.4	11.9	10.1	10.1
	min : 13.7	10.7	9.4	9.0
	mean : 14.1	11.2	9.8	9.4
Ignition delay	ms max : 1.183	1.151	1.177	1.472
	min : 1.130	1.033	1.036	1.317
	mean : 1.161	1.076	1.143	1.374
Max. cylinder pressure	bar : 61.5	61.4	65.3	67.2
Max. pressure rise	bar/deg : 7.6	8.3	10.2	11.4
	bar/ms : 91.9	86.1	87.5	79.3
Oil temperature	deg C : 80.0	80.0	83.0	80.0
Water IN temperature	deg C : 45.0	53.0	50.0	50.0
Water OUT temperature	deg C : 78.0	78.0	80.0	83.0
Exhaust temperature	deg C : 176.0	169.0	155.0	142.0

ENGINE TEST RESULTS

PAGE 9

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2960

FUEL
 EMULSION : E20
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/5/85
 TEST ID : UNIDO_1

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)

800

IDLE CONDITION

20 deg BTDC

Observed load N : 0.32
 Observed torque NM : 2.6
 Observed speed RPM : 832
 Observed power KW : .2

Air temperature deg C : 29.0
 Barometric pressure mBar : 1020.0
 Correction factor : 0.990
 Corrected torque NM : 2.6
 Corrected power KW : .2

Fuel consumed gms : 15.9
 Measurement time seconds : 72.610
 Fuel mass flow gms/sec : 0.22
 B.S.F.C. gms/KW/hr : 3523.2
 Thermal efficiency % : 2.6
 Fuel temperature deg C : 35.0
 Pump delivery/stroke mm³ : 12.7
 mgms : 10.5

Start of injection deg. max : 16.6
 min : 15.6
 mean : 16.3

Start of combustion deg. max : 8.4
 min : 7.3
 mean : 8.0

Ignition delay deg max : 8.7
 min : 8.0
 mean : 8.3

Ignition delay/ ms max : 1.749
 min : 1.600
 mean : 1.656

Max. cylinder pressure bar : 52.6
 Max. pressure rise bar/deg : 5.4
 bar/ms : 27.2

Oil temperature deg C : 79.0
 Water IN temperature deg C : 51.0
 Water OUT temperature deg C : 74.0
 Exhaust temperature deg C : 94.0

ENGINE TEST RESULTS

PAGE 9

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E20/2.6TEGDN
 DENSITY Kg/l : 0.848
 CAL VALUE MJ/Kg : 38.69

DATE : 22/5/85
 TEST ID : UNIDO_2

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800	
		100 % LOAD (Nominal)		20 deg BTDC			
Observed load	N :	16.60	18.01	18.03	18.15	18.16	
Observed torque	NM :	132.9	144.2	144.4	145.3	145.4	
Observed speed	RPM :	2056	1752	1445	1144	836	
Observed power	KW :	28.6	26.4	21.8	17.4	12.7	
Air temperature	deg C :	28.0	34.0	29.0	32.0	31.0	
Barometric pressure	mBar :	1020.4	1020.5	1020.5	1020.5	1020.5	
Correction factor	:	0.989	0.993	0.990	0.995	0.993	
Corrected torque	NM :	131.4	143.9	143.0	144.6	144.4	
Corrected power	KW :	28.3	26.4	21.6	17.3	12.6	
Fuel consumed	gms :	79.2	83.5	88.3	89.9	88.1	
Measurement time	seconds :	29.590	34.590	41.990	52.990	72.180	
Fuel mass flow	gms/sec :	2.68	2.41	2.10	1.70	1.22	
B.S.F.C.	gms/KW/hr :	340.6	329.1	350.0	352.8	347.4	
Thermal efficiency	% :	27.3	28.3	26.6	26.4	26.8	
Fuel temperature	deg C :	34.0	36.0	36.0	39.0	39.0	
Pump delivery/stroke	mm ³ :	62.7	66.5	70.2	71.8	70.6	
	mgms :	52.1	55.1	58.2	59.3	58.4	
Start of injection deg.	max :	20.3	21.7	22.8	23.6	18.2	
	min :	20.1	21.1	21.9	22.7	18.1	
	mean :	20.2	21.2	22.4	23.0	18.1	
Start of combustion deg.	max :	8.3	11.0	12.9	13.8	11.9	
	min :	8.2	10.8	11.8	13.6	11.0	
	mean :	8.2	10.9	12.4	13.7	11.5	
Ignition delay	deg	max :	12.0	10.8	10.9	10.0	7.1
	min :	11.9	10.1	9.1	9.0	6.2	
	mean :	11.9	10.3	10.0	9.3	6.6	
Ignition delay	ms	max :	0.975	1.031	1.260	1.458	1.416
	min :	0.963	0.962	1.050	1.318	1.236	
	mean :	0.969	0.983	1.153	1.355	1.311	
Max. cylinder pressure	bar :	89.6	93.7	95.5	95.6	89.3	
Max. pressure rise	bar/deg :	16.4	17.5	17.8	15.0	10.2	
	bar/ms :	202.7	183.9	154.1	103.0	51.3	
Oil temperature	deg C :	84.0	88.0	88.0	89.0	89.0	
Water IN temperature	deg C :	48.0	63.0	63.0	63.0	62.0	
Water OUT temperature	deg C :	79.0	80.0	79.0	80.0	80.0	
Exhaust temperature	deg C :	364.0	377.0	375.0	349.0	314.0	

ENGINE TEST RESULTS

PAGE 10

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2960

FUEL
EMULSION : E20/2.6TEGDN
DENSITY Kg/l : 0.848
CAL VALUE MJ/Kg : 38.69

DATE : 22/5/85
TEST ID : UNIDO_2

DYND TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	67 % LOAD (Nominal)		20 deg BTDC				
Observed load	N :	11.00	11.20	10.93	11.41	11.22	
Observed torque	NM :	89.6	89.6	87.5	91.4	89.8	
Observed speed	RPM :	2064	1734	1443	1139	823	
Observed power	KW :	19.1	16.3	13.2	10.9	7.7	
Air temperature	deg C :	30.0	31.0	30.0	30.0	30.0	
Barometric pressure	mBar :	1020.5	1020.5	1020.5	1020.5	1020.5	
Correction factor	:	0.992	0.993	0.992	0.992	0.992	
Corrected torque	NM :	87.8	89.1	86.8	90.6	89.1	
Corrected power	KW :	19.0	16.2	13.1	10.8	7.7	
Fuel consumed	gms :	50.5	49.0	47.9	51.4	54.9	
Measurement time	seconds :	29.590	34.990	41.990	53.190	73.380	
Fuel mass flow	gms/sec :	1.71	1.40	1.14	0.97	0.75	
B.S.F.C.	gms/KW/hr :	323.6	311.8	313.1	321.8	350.9	
Thermal efficiency	% :	28.8	29.8	29.7	28.9	26.5	
Fuel temperature	deg C :	40.0	39.0	40.0	40.0	39.0	
Pump delivery/stroke	mm ³ :	40.1	39.1	38.3	41.1	44.0	
	mgms :	33.1	32.3	31.6	33.9	36.4	
Start of injection deg.	max :	16.0	17.6	18.2	20.1	18.1	
	min :	14.7	16.5	17.4	20.0	17.5	
	mean :	15.5	17.2	17.6	20.0	17.8	
Start of combustion deg.	max :	4.8	7.4	8.5	11.9	11.9	
	min :	4.5	7.3	8.2	11.0	11.0	
	mean :	4.6	7.3	8.3	11.2	11.5	
Ignition delay	deg	max :	11.2	10.3	9.9	9.0	7.2
	min :	10.0	9.2	8.9	8.2	5.7	
	mean :	10.9	9.9	9.3	8.8	6.3	
Ignition delay	ms	max :	0.902	0.987	1.147	1.321	1.450
	min :	0.803	0.886	1.032	1.204	1.145	
	mean :	0.877	0.949	1.071	1.292	1.280	
Max. cylinder pressure	bar :	71.1	75.8	77.2	80.6	78.9	
Max. pressure rise	bar/deg :	10.4	9.9	11.7	13.2	9.5	
	bar/ms :	129.4	102.6	101.6	90.1	47.0	
Oil temperature	deg C :	93.0	94.0	92.0	89.0	84.0	
Water IN temperature	deg C :	53.0	50.0	49.0	53.0	54.0	
Water OUT temperature	deg C :	79.0	77.0	80.0	80.0	84.0	
Exhaust temperature	deg C :	277.0	247.0	226.0	218.0	205.0	

ENGINE TEST RESULTS

PAGE 11

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/2.6TEGDN
DENSITY Kg/l : 0.848
CAL VALUE MJ/Kg : 38.69

DATE : 22/5/85
TEST ID : UNIDO_2

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	33 % LOAD (Nominal)		20 deg BTDC		
Observed load	N : 4.41	4.26	4.41	4.69	4.64
Observed torque	NM : 35.3	34.1	35.3	37.6	37.2
Observed speed	RPM : 2029	1742	1436	1123	849
Observed power	KW : 7.5	6.2	5.3	4.4	3.3
Air temperature	deg C : 29.0	29.0	28.0	30.0	30.0
Barometric pressure	mBar : 1020.5	1020.5	1020.5	1020.8	1020.9
Correction factor	: 0.990	0.990	0.989	0.992	0.992
Corrected torque	NM : 35.0	33.8	34.9	37.2	36.8
Corrected power	KW : 7.4	6.2	5.3	4.4	3.3
Fuel consumed	gms : 32.2	29.3	29.8	27.2	33.8
Measurement time	seconds : 29.990	34.790	42.190	53.790	71.180
Fuel mass flow	gms/sec : 1.07	0.84	0.71	0.51	0.47
B.S.F.C.	gms/KW/hr : 520.3	491.9	484.0	415.5	522.0
Thermal efficiency	% : 17.9	19.9	19.2	22.4	17.8
Fuel temperature	deg C : 39.0	39.0	39.0	39.0	39.0
Pump delivery/stroke	mm ³ : 25.6	23.4	23.8	21.8	27.1
	mgms : 21.2	19.3	19.7	18.0	22.4
Start of injection deg.	max : 13.2	12.2	13.7	17.3	17.4
	min : 12.8	12.1	12.8	17.3	17.2
	mean : 13.1	12.1	13.4	17.3	17.3
Start of combustion deg.	max : 1.1	2.1	4.8	9.2	11.0
	min : 1.0	1.9	4.7	9.1	10.1
	mean : 1.1	2.0	4.7	9.1	10.8
Ignition delay	deg max : 12.1	10.2	9.0	8.2	7.2
	min : 11.8	10.0	8.1	8.1	6.2
	mean : 12.0	10.1	8.7	8.2	6.6
Ignition delay	ms max : 0.991	0.977	1.049	1.220	1.419
	min : 0.969	0.961	0.941	1.195	1.226
	mean : 0.983	0.969	1.007	1.211	1.290
Max. cylinder pressure	bar : 58.8	59.3	61.1	65.8	68.3
Max. pressure rise	bar/deg : 7.7	6.9	7.5	8.9	10.7
	bar/ms : 93.9	72.5	65.0	59.7	54.4
Oil temperature	deg C : 88.0	89.0	88.0	84.0	84.0
Water IN temperature	deg C : 40.0	40.0	44.0	54.0	53.0
Water OUT temperature	deg C : 76.0	75.0	75.0	76.0	81.0
Exhaust temperature	deg C : 191.0	188.0	153.0	135.0	138.0

ENGINE TEST RESULTS

PAGE 12

ENGINE
 MAKE FORD
 MODEL : 3000
 No CYL 3
 CAPACITY cc : 2960

FUEL
 EMULSION : E20/2.6TEGDN
 DENSITY Kg/l : 0.848
 CAL VALUE MJ/Kg : 38.69

DATE 22/5/85
 TEST ID : UNIDG_2

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL) 800

IDLE CONDITION 20 deg BTDC

Observed load N : 0.31
 Observed torque NM : 2.5
 Observed speed RPM : 830
 Observed power KW : .2

Air temperature deg C : 29.0
 Barometric pressure mBar : 1020.8
 Correction factor : 0.990
 Corrected torque NM : 2.5
 Corrected power KW : .2

Fuel consumed gms : 18.7
 Measurement time seconds : 72.760
 Fuel mass flow gms/sec : 0.23
 B.S.F.C. gms/KW/hr : 3867.3
 Thermal efficiency % : 2.4
 Fuel temperature deg C : 40.0
 Pump delivery/stroke mm³ : 13.6
 mgms : 11.2

Start of injection deg. max : 16.3
 min : 15.4
 mean : 15.9

Start of combustion deg. max : 9.2
 min : 8.3
 mean : 9.0

Ignition delay deg max : 7.1
 min : 6.4
 mean : 6.9

Ignition delay ms max : 1.425
 min : 1.292
 mean : 1.385

Max. cylinder pressure bar : 54.4
 Max. pressure rise bar/deg : 6.8
 bar/ms : 33.9

Oil temperature deg C : 80.0
 Water IN temperature deg C : 65.0
 Water OUT temperature deg C : 76.0
 Exhaust temperature deg C : 100.0

ENGINE TEST RESULTS

PAGE 13

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : L20/5.2TEGDN
 DENSITY Kg/l : 0.850
 CAL. VALUE MJ/Kg : 38.55

DATE : 22/5/85
 TEST ID : UNIDO_4

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		100 % LOAD (Nominal)		20 deg BTDC		
Observed load	N :	17.01	17.88	18.19	18.32	18.32
Observed torque	NM :	136.2	143.1	145.7	146.6	146.7
Observed speed	RPM :	2015	1739	1438	1139	830
Observed power	KW :	28.7	26.1	21.9	17.5	12.8
Air temperature	deg C :	30.0	30.0	31.0	32.0	29.0
Barometric pressure	mBar :	1021.0	1021.1	1021.1	1021.1	1021.2
Correction factor	% :	0.992	0.991	0.993	0.995	0.990
Corrected torque	NM :	135.0	141.9	144.7	145.9	145.2
Corrected power	KW :	28.5	25.8	21.8	17.4	12.6
Fuel consumed	gms :	81.4	85.4	90.1	91.1	89.3
Measurement time	seconds :	30.190	34.990	42.190	53.190	72.780
Fuel mass flow	gms/sec :	2.70	2.44	2.14	1.71	1.23
B.S.F.C.	gms/KW/hr :	340.6	340.0	353.0	354.3	350.0
Thermal efficiency	% :	27.4	27.5	26.5	26.4	26.7
Fuel temperature	deg C :	33.0	34.0	35.0	37.0	38.0
Pump delivery/stroke	mm ³ :	64.2	67.4	71.4	72.4	71.3
	mgms :	53.5	56.1	59.4	60.1	59.1
Start of injection deg.	max :	20.3	22.0	22.7	23.6	19.1
	min :	19.2	21.0	22.0	22.7	18.4
	mean :	19.9	21.6	22.4	23.2	18.7
Start of combustion deg.	max :	10.0	11.9	12.8	14.6	12.8
	min :	9.2	11.0	12.7	14.5	12.7
	mean :	9.7	11.7	12.7	14.5	12.8
Ignition delay deg.	max :	10.7	10.2	10.0	9.1	6.3
	min :	10.1	9.2	9.2	8.2	5.6
	mean :	10.3	9.9	9.6	8.7	5.9
Ignition delay ms	max :	0.882	0.979	1.165	1.326	1.265
	min :	0.833	0.883	1.061	1.192	1.129
	mean :	0.849	0.949	1.118	1.271	1.187
Max. cylinder pressure	bar :	88.8	93.6	94.4	96.3	90.8
Max. pressure rise	bar/deg :	12.7	13.2	13.7	13.1	10.5
	bar/ms :	153.9	137.8	118.2	89.6	52.3
Oil temperature	deg C :	83.0	87.0	88.0	87.0	88.0
Water IN temperature	deg C :	57.0	63.0	65.0	64.0	61.0
Water OUT temperature	deg C :	79.0	80.0	80.0	81.0	79.0
Exhaust temperature	deg C :	393.0	395.0	377.0	349.0	315.0

ENGINE TEST RESULTS

PAGE 14

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/5.2TEGDN
DENSITY Kg/l : 0.850
CAL VALUE MJ/Kg : 38.55

DATE : 22/5/85
TEST ID : UNIDO_4

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		67 % LOAD (Nominal)		20 deg BTDC		
Observed load	N	11.23	11.11	11.14	11.15	11.63
Observed torque	NM	89.9	89.0	89.2	89.3	93.1
Observed speed	RPM	2101	1739	1443	1119	829
Observed power	KW	19.8	16.2	13.5	10.5	8.1
Air temperature	deg C	28.0	28.0	29.0	28.0	27.0
Barometric pressure	mBar	1021.2	1021.0	1021.0	1021.0	1021.0
Correction factor		0.988	0.988	0.990	0.988	0.987
Corrected torque	NM	88.9	87.9	88.3	88.2	91.9
Corrected power	KW	19.5	16.0	13.3	10.3	8.0
Fuel consumed	gms	54.9	49.7	49.1	50.0	51.0
Measurement time	seconds	28.990	34.990	41.990	53.990	72.780
Fuel mass flow	gms/sec	1.89	1.39	1.17	0.93	0.70
B.S.F.C.	gms/KW/hr	348.9	312.9	315.4	322.5	316.2
Thermal efficiency	%	26.8	29.8	29.6	29.0	29.5
Fuel temperature	deg C	38.0	38.0	39.0	39.0	39.0
Pump delivery/stroke	mm ³	43.5	38.6	39.1	40.0	40.8
	mgms	36.1	32.0	32.4	33.1	33.8
Start of injection deg.	max	16.8	17.3	18.1	19.9	19.0
	min	15.9	16.5	17.4	19.2	18.5
	mean	16.3	16.7	17.8	19.6	18.8
Start of combustion deg.	max	6.5	7.4	9.2	11.9	12.8
	min	5.4	7.3	9.1	11.8	12.7
	mean	5.7	7.3	9.2	11.8	12.7
Ignition delay deg.	max	11.3	9.9	8.9	8.1	6.3
	min	9.4	9.1	8.2	7.3	5.7
	mean	10.6	9.3	8.6	7.7	6.1
Ignition delay ms	max	0.898	0.954	1.026	1.207	1.267
	min	0.749	0.873	0.946	1.081	1.148
	mean	0.839	0.896	0.995	1.154	1.216
Max. cylinder pressure	bar	72.2	74.8	77.3	80.3	77.6
Max. pressure rise	bar/deg	9.9	10.4	9.8	12.1	10.7
	bar/ms	124.2	108.3	84.6	80.9	53.5
Oil temperature	deg C	93.0	92.0	90.0	87.0	85.0
Water IN temperature	deg C	51.0	48.0	47.0	52.0	55.0
Water OUT temperature	deg C	80.0	79.0	79.0	79.0	83.0
Exhaust temperature	deg C	285.0	246.0	231.0	213.0	198.0

ENGINE TEST RESULTS

PAGE 15

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/5.2TEGDN
DENSITY Kg/l : 0.850
CAL VALUE MJ/Kg : 38.55

DATE : 22/3/85
TEST ID : UNIDO_4

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	33 % LOAD (Nominal)		20 deg BTDC		
Observed load	N : 4.21	4.43	4.32	4.32	4.60
Observed torque	NM : 33.7	35.5	34.6	34.6	36.8
Observed speed	RPM : 2028	1734	1439	1139	826
Observed power	KW : 7.2	6.4	5.2	4.1	3.2
Air temperature	deg C : 27.0	28.0	29.0	28.0	28.0
Barometric pressure	mBar : 1021.2	1021.3	1021.2	1021.5	1021.5
Correction factor	: 0.986	0.988	0.990	0.988	0.988
Corrected torque	NM : 33.2	35.0	34.2	34.2	36.4
Corrected power	KW : 7.1	6.4	5.2	4.1	3.1
Fuel consumed	gms : 30.5	30.9	28.7	32.4	31.4
Measurement time	seconds : 30.000	34.990	41.990	53.190	73.160
Fuel mass flow	gms/sec : 1.02	0.88	0.68	0.61	0.43
B.S.F.C.	gms/KW/hr : 518.4	499.8	477.5	537.7	490.8
Thermal efficiency	% : 18.0	18.7	19.6	17.4	19.0
Fuel temperature	deg C : 39.0	36.0	38.0	38.0	35.0
Pump delivery/stroke	mm ³ : 24.2	24.5	22.9	25.9	25.0
	mgms : 20.1	20.4	19.0	21.4	20.8
Start of injection deg.	max : 13.1	12.1	13.0	18.1	18.9
	min : 12.8	12.0	12.0	17.4	18.2
	mean : 12.9	12.0	12.2	17.6	18.4
Start of combustion deg.	max : 2.4	3.8	4.6	10.1	11.9
	min : 1.9	2.9	3.8	9.9	11.8
	mean : 2.1	3.4	4.0	10.0	11.9
Ignition delay deg.	max : 11.1	9.2	8.4	8.1	7.1
	min : 10.6	8.2	8.0	7.4	6.3
	mean : 10.9	8.6	8.2	7.6	6.5
Ignition delay ms	max : 0.913	0.885	0.970	1.178	1.429
	min : 0.870	0.789	0.931	1.076	1.273
	mean : 0.892	0.825	0.951	1.105	1.317
Max. cylinder pressure	bar : 58.1	60.2	58.1	68.7	65.0
Max. pressure rise	bar/deg : 5.9	6.6	6.3	9.4	9.4
	bar/ms : 71.4	68.6	54.8	64.0	46.7
Oil temperature	deg C : 88.0	88.0	89.0	85.0	84.0
Water IN temperature	deg C : 47.0	48.0	51.0	35.0	34.0
Water OUT temperature	deg C : 80.0	80.0	82.0	76.0	75.0
Exhaust temperature	deg C : 180.0	171.0	152.0	144.0	133.0

ENGINE TEST RESULTS

PAGE 16

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E20/S.2TEGDN
 DENSITY Kg/l : 0.850
 CAL VALUE MJ/Kg : 38.55

DATE : 22/3/85
 TEST ID : UNID00_4

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)

800

IDLE CONDITION

20 deg BTDC

Observed load	N :	0.31
Observed torque	NM :	2.5
Observed speed	RPM :	828
Observed power	KW :	.2
Air temperature	deg C :	28.0
Barometric pressure	mBar :	1021.5
Correction factor	:	0.988
Corrected torque	NM :	2.5
Corrected power	KW :	.2
Fuel consumed	gms :	16.8
Measurement time	seconds :	72.940
Fuel mass flow	gms/sec :	0.23
B.S.F.C.	gms/KW/hr :	3852.5
Thermal efficiency	% :	2.4
Fuel temperature	deg C :	34.0
Pump delivery/stroke	mm ³ :	13.4
	mgms :	11.1
Start of injection deg.	max :	17.6
	min :	17.1
	mean :	17.3
Start of combustion deg.	max :	10.2
	min :	10.1
	mean :	10.1
Ignition delay	deg max :	7.5
	min :	7.0
	mean :	7.2
Ignition delay	ms max :	1.504
	min :	1.415
	mean :	1.452
Max. cylinder pressure	bar :	56.5
Max. pressure rise	bar/deg :	6.4
	bar/ms :	31.6
Oil temperature	deg C :	79.0
Water IN temperature	deg C :	34.0
Water OUT temperature	deg C :	74.0
Exhaust temperature	deg C :	97.0

ENGINE TEST RESULTS

PAGE 17

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E20/.2ION
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/5/85
 TEST ID : UNIDO_5

DYND TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		100 % LOAD (Nominal)			20 deg BTDC	
Observed load	N	17.36	18.08	18.41	18.57	18.57
Observed torque	NM	139.0	144.8	147.4	148.7	148.6
Observed speed	RPM	2017	1751	1459	1140	839
Observed power	KW	29.4	26.5	22.5	17.7	13.1
Air temperature	deg C	34.0	30.0	32.0	30.0	28.0
Barometric pressure	mBar	1021.5	1021.5	1021.5	1021.5	1021.5
Correction factor		0.998	0.991	0.994	0.991	0.988
Corrected torque	NM	138.6	143.5	146.6	147.3	146.8
Corrected power	KW	29.3	26.3	22.4	17.6	12.9
Fuel consumed	gms	78.7	83.5	88.9	90.2	87.7
Measurement time	seconds	30.190	34.790	41.590	52.990	71.980
Fuel mass flow	gms/sec	2.61	2.40	2.14	1.70	1.22
B.S.F.C.	gms/KW/hr	320.4	328.5	343.8	348.3	340.1
Thermal efficiency	%	28.9	28.2	27.0	26.6	27.3
Fuel temperature	deg C	34.0	37.0	38.0	38.0	38.0
Pump delivery/stroke	mm ³	62.4	66.5	71.1	72.4	70.5
	mgms	51.7	54.8	58.6	59.7	58.1
Start of injection deg.	max	20.3	21.8	22.7	23.4	18.2
	min	20.0	21.0	21.8	22.7	17.6
	mean	20.1	21.2	22.3	23.0	18.1
Start of combustion deg.	max	8.3	10.0	11.8	12.8	11.1
	min	8.1	9.9	10.9	12.7	11.0
	mean	8.2	10.0	11.3	12.3	11.0
Ignition delay	deg	max	11.8	11.8	10.6	7.3
	min	12.2	11.0	10.0	9.9	6.6
	mean	11.7	11.2	11.0	10.2	7.0
Ignition delay	ms	max	1.121	1.343	1.554	1.444
	min	1.007	1.043	1.142	1.446	1.305
	mean	0.980	1.064	1.261	1.495	1.400
Max. cylinder pressure	bar	92.4	95.1	96.3	98.0	91.5
Max. pressure rise	bar/deg	19.6	17.8	22.0	18.7	12.2
	bar/ms	237.4	187.4	192.4	127.9	61.6
Oil temperature	deg C	88.0	92.0	92.0	92.0	87.0
Water IN temperature	deg C	63.0	66.0	66.0	66.0	61.0
Water OUT temperature	deg C	83.0	83.0	83.0	81.0	82.0
Exhaust temperature	deg C	390.0	380.0	376.0	350.0	317.0

ENGINE TEST RESULTS

PAGE 18

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/.2IGN
DENSITY Kg/l : 0.845
CAL VALUE MJ/Kg : 38.83

DATE : 22/5/85
TEST ID : UNIDO_5

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	67 % LOAD (Nominal)		20 deg BTDC			
Observed load	N	10.82	10.94	11.13	11.41	11.61
Observed torque	NM	96.6	87.6	89.1	91.3	93.0
Observed speed	RPM	2017	1744	1436	1132	832
Observed power	KW	18.3	16.0	13.4	10.8	8.1
Air temperature	deg C	29.0	27.0	28.0	28.0	29.0
Barometric pressure	mBar	1021.5	1021.5	1021.5	1021.5	1021.7
Correction factor		0.990	0.986	0.988	0.988	0.989
Corrected torque	NM	85.7	86.4	88.0	90.2	92.0
Corrected power	KW	18.1	15.8	13.2	10.7	8.0
Fuel consumed	gms	48.5	47.8	48.1	49.2	51.6
Measurement time	seconds	30.190	34.790	42.190	53.390	72.580
Fuel mass flow	gms/sec	1.61	1.37	1.14	0.92	0.71
B.S.F.C.	gms/KW/hr	319.4	313.5	309.9	310.3	319.1
Thermal efficiency	%	29.0	29.6	29.9	29.9	29.1
Fuel temperature	deg C	38.0	38.0	39.0	38.0	39.0
Pump delivery/stroke	mm ³ /mgms	38.6	38.2	38.6	39.5	41.5
		31.9	31.5	31.7	32.6	34.2
Start of injection deg.	max	15.9	17.1	18.2	19.8	19.1
	min	14.7	16.4	17.3	19.1	18.1
	mean	15.2	16.7	17.6	19.4	18.7
Start of combustion deg.	max	3.8	5.6	8.3	11.0	11.9
	min	3.6	5.5	8.1	10.1	10.9
	mean	3.7	5.5	8.2	10.8	11.2
Ignition delay	deg	max	11.6	9.9	8.9	8.1
	min	12.2	10.8	9.1	8.1	7.1
	mean	10.9	10.8	9.3	8.6	7.5
Ignition delay	ms	max	1.107	1.147	1.318	1.616
	min	1.007	1.034	1.057	1.195	1.430
	mean	0.951	1.065	1.083	1.263	1.505
Max. cylinder pressure	bar	72.3	75.7	78.8	80.7	79.5
Max. pressure rise	bar/deg	11.5	10.6	12.0	14.4	11.5
	bar/ms	139.2	110.7	103.1	97.5	57.2
Oil temperature	deg C	93.0	92.0	92.0	87.0	88.0
Water IN temperature	deg C	52.0	47.0	48.0	52.0	56.0
Water OUT temperature	deg C	79.0	79.0	79.0	78.0	83.0
Exhaust temperature	deg C	267.0	238.0	224.0	209.0	201.0

ENGINE TEST RESULTS

PAGE 19

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/.2ION
DENSITY Kg/l : 0.845
CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
TEST ID : UNID0_5

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	33 % LOAD (Nominal)		20 deg BTDC		
Observed load	N : 4.55	4.07	4.35	4.66	4.44
Observed torque	NM : 36.4	32.6	34.8	37.3	35.5
Observed speed	RPM : 2017	1734	1423	1132	827
Observed power	KW : 7.7	5.9	5.2	4.4	3.1
Air temperature	deg C : 27.0	28.0	28.0	28.0	27.0
Barometric pressure	mBar : 1021.6	1021.5	1021.5	1021.5	1021.5
Correction factor	: 0.986	0.988	0.988	0.988	0.986
Corrected torque	NM : 35.9	32.2	34.4	36.8	35.1
Corrected power	KW : 7.6	5.8	5.1	4.4	3.0
Fuel consumed	gms : 31.6	28.1	29.1	28.3	30.1
Measurement time	seconds : 30.190	34.980	42.590	53.390	72.980
Fuel mass flow	gms/sec : 1.05	0.80	0.68	0.53	0.41
B.S.F.C.	gms/KW/hr : 496.9	495.1	479.5	437.3	489.1
Thermal efficiency	% : 18.7	18.7	19.3	21.2	19.0
Fuel temperature	deg C : 39.0	38.0	38.0	37.0	37.0
Pump delivery/stroke	mm+3 : 25.2	22.5	23.3	22.7	24.2
	mgms : 20.8	18.5	19.2	18.7	19.9
Start of injection deg.	max : 13.2	12.1	13.1	17.5	18.1
	min : 13.0	11.9	12.0	17.2	17.4
	mean : 13.1	12.1	12.6	17.4	17.9
Start of combustion deg.	max : 1.1	1.9	3.9	9.2	11.0
	min : .3	1.2	2.9	8.3	10.1
	mean : .5	1.5	3.4	8.5	10.3
Ignition delay	deg max : 12.9	10.9	9.9	9.2	8.0
	min : 11.9	10.1	8.1	8.2	7.1
	mean : 12.6	10.5	9.1	8.9	7.6
Ignition delay	ms max : 1.063	1.050	1.164	1.361	1.614
	min : 0.986	0.975	0.951	1.210	1.428
	mean : 1.041	1.013	1.068	1.307	1.525
Max. cylinder pressure	bar : 61.3	59.9	61.0	66.3	65.6
Max. pressure rise	bar/deg : 6.8	6.7	8.5	10.1	9.9
	bar/ms : 82.9	70.2	72.7	68.4	49.3
Oil temperature	deg C : 87.0	87.0	88.0	83.0	82.0
Water IN temperature	deg C : 40.0	50.0	51.0	35.0	33.0
Water OUT temperature	deg C : 77.0	79.0	63.0	75.0	78.0
Exhaust temperature	deg C : 190.0	182.0	151.0	136.0	129.0

ENGINE TEST RESULTS

PAGE 20

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E20/.210N
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
 TEST ID : UNID0_5

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL) 800

IDLE CONDITION

20 deg BTDC

Observed load	N	0.32
Observed torque	NM	2.5
Observed speed	RPM	821
Observed power	KW	.2
Air temperature	deg C	27.0
Barometric pressure	mBar	1021.5
Correction factor		0.986
Corrected torque	NM	2.5
Corrected power	KW	.2
Fuel consumed	gms	15.4
Measurement time	seconds	73.580
Fuel mass flow	gms/sec	0.21
B.S.F.C.	gms/KW/hr	3513.9
Thermal efficiency	%	2.6
Fuel temperature	deg C	37.0
Pump delivery/stroke	mm ³	12.4
	mgms	10.2
Start of injection deg.	max	17.1
	min	15.8
	mean	16.5
Start of combustion deg.	max	9.2
	min	8.3
	mean	8.8
Ignition delay	deg	max 8.1
		min 7.2
		mean 7.7
Ignition delay	ms	max 1.652
		min 1.466
		mean 1.554
Max. cylinder pressure	bar	55.6
Max. pressure rise	bar/deg	7.2
	bar/ms	35.7
Oil temperature	deg C	81.0
Water IN temperature	deg C	52.0
Water OUT temperature	deg C	74.0
Exhaust temperature	deg C	94.0

ENGINE TEST RESULTS

PAGE 21

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : E20/.4ION
DENSITY Kg/l : 0.845
CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
TEST ID : UNID0_6

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800	
		100 % LOAD (Nominal)		20 deg BTDC			
Observed load	N :	17.20	18.11	18.50	18.61	18.62	
Observed torque	NM :	137.7	145.0	148.1	149.0	149.1	
Observed speed	RPM :	2015	1714	1438	1133	836	
Observed power	KW :	29.1	28.0	22.3	17.7	13.1	
Air temperature	deg C :	27.0	30.0	30.0	30.0	29.0	
Barometric pressure	mBar :	1021.5	1021.5	1021.5	1021.5	1021.5	
Correction factor		0.986	0.991	0.991	0.991	0.990	
Corrected torque	NM :	135.8	143.7	146.8	147.6	147.5	
Corrected power	KW :	28.7	25.8	22.1	17.6	12.9	
Fuel consumed	gms :	79.5	84.0	89.6	90.3	87.8	
Measurement time	seconds :	30.190	35.390	42.190	53.190	72.180	
Fuel mass flow	gms/sec :	2.63	2.37	2.12	1.70	1.22	
B.S.F.C.	gms/KW/hr :	330.8	331.2	345.9	348.0	339.0	
Thermal efficiency	% :	28.0	28.0	26.8	26.6	27.3	
Fuel temperature	deg C :	33.0	33.0	34.0	34.0	35.0	
Pump delivery/stroke	mm ³ :	63.1	66.8	71.4	72.2	70.3	
	mgms :	52.3	55.4	59.1	59.8	58.2	
Start of injection deg.	max :	20.3	22.0	22.7	22.8	18.1	
	min :	20.0	21.8	22.6	22.7	17.5	
	mean :	20.1	21.9	22.7	22.8	18.0	
Start of combustion deg.	max :	8.3	10.8	11.9	13.6	11.0	
	min :	8.2	10.0	11.8	13.6	10.9	
	mean :	8.2	10.2	11.9	13.6	11.0	
Ignition delay	deg	max :	12.1	11.9	10.9	9.2	7.2
	min :	11.6	11.0	10.8	9.1	6.5	
	mean :	11.9	11.7	10.8	9.1	7.0	
Ignition delay	ms	max :	1.001	1.158	1.261	1.348	1.426
	min :	0.962	1.072	1.248	1.339	1.297	
	mean :	0.982	1.135	1.254	1.342	1.330	
Max. cylinder pressure	bar :	91.9	95.9	96.9	97.9	91.0	
Max. pressure rise	bar/deg :	18.3	16.7	17.4	16.6	12.8	
	bar/ms :	220.8	171.9	150.3	113.2	64.4	
Oil temperature	deg C :	82.0	88.0	87.0	87.0	87.0	
Water IN temperature	deg C :	49.0	62.0	65.0	66.0	61.0	
Water OUT temperature	deg C :	78.0	81.0	81.0	79.0	79.0	
Exhaust temperature	deg C :	365.0	374.0	375.0	349.0	313.0	

ENGINE TEST RESULTS

PAGE 22

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION E20/.410N
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
 TEST ID : UNID0_6

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	67 % LOAD (Nominal)		20 deg BTDC		
Observed load	N : 11.13	11.43	11.27	11.17	11.33
Observed torque	NM : 89.1	91.5	90.2	89.4	90.7
Observed speed	RFM : 2042	1731	1443	1140	823
Observed power	KW : 19.1	16.6	13.6	10.7	7.8
Air temperature	deg C : 28.0	28.0	27.0	28.0	27.0
Barometric pressure	mBar : 1021.5	1021.5	1021.5	1021.5	1021.5
Correction factor	: 0.988	0.988	0.986	0.988	0.986
Corrected torque	NM : 88.0	90.4	89.0	88.3	89.5
Corrected power	KW : 18.8	16.4	13.5	10.5	7.7
Fuel consumed	gms : 50.2	49.0	48.2	49.9	55.1
Measurement time	seconds : 29.800	35.000	41.990	52.990	73.380
Fuel mass flow	gms/sec : 1.68	1.40	1.15	0.94	0.75
B.S.F.C.	gms/KW/hr : 322.2	307.6	307.2	321.4	350.4
Thermal efficiency	% : 28.8	30.1	30.2	28.8	26.5
Fuel temperature	deg C : 38.0	38.0	37.0	38.0	37.0
Pump delivery/stroke	mm ³ : 40.0	39.2	38.6	40.1	44.2
	mgms : 33.0	32.3	31.8	33.0	36.5
Start of injection deg.	max : 16.2	17.4	18.2	20.0	18.4
	min : 14.6	16.7	17.3	19.1	18.1
	mean : 15.4	17.0	17.8	19.4	18.2
Start of combustion deg.	max : 4.7	7.4	8.3	11.0	11.8
	min : 3.7	6.3	8.2	10.9	11.0
	mean : 4.0	6.6	8.3	10.9	11.2
Ignition delay deg.	max : 12.0	10.9	9.8	9.0	7.3
	min : 10.7	10.0	9.1	8.2	6.3
	mean : 11.5	10.4	9.5	8.5	7.0
Ignition delay ms	max : 0.979	1.054	1.136	1.312	1.476
	min : 0.876	0.964	1.048	1.203	1.274
	mean : 0.935	1.005	1.101	1.246	1.421
Max. cylinder pressure	bar : 74.5	76.6	78.7	81.1	80.9
Max. pressure rise	bar/deg : 11.0	11.3	12.1	13.6	10.1
	bar/ms : 134.4	117.0	105.0	92.7	49.9
Oil temperature	deg C : 91.0	91.0	87.0	88.0	82.0
Water IN temperature	deg C : 53.0	47.0	47.0	51.0	55.0
Water OUT temperature	deg C : 78.0	79.0	79.0	79.0	82.0
Exhaust temperature	deg C : 269.0	242.0	227.0	209.0	200.0

ENGINE TEST RESULTS

PAGE 23

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E20/.4ION
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
 TEST ID : UNIDO_6

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	33 % LOAD (Nominal)		20 deg BTDC			
Observed load	N	4.25	4.38	4.37	4.59	4.62
Observed torque	NM	34.0	35.0	35.0	36.7	37.0
Observed speed	RPM	2042	1744	1436	1122	834
Observed power	KW	7.3	6.4	5.3	4.3	3.2
Air temperature	deg C	28.0	28.0	28.0	27.0	27.0
Barometric pressure	mBar	1021.5	1021.5	1021.5	1021.5	1021.5
Correction factor		0.988	0.988	0.988	0.986	0.986
Corrected torque	NM	33.6	34.6	34.6	36.2	36.5
Corrected power	KW	7.2	6.3	5.2	4.3	3.2
Fuel consumed	gms	30.2	28.4	27.6	25.9	30.0
Measurement time	seconds	29.790	34.790	42.190	53.780	72.380
Fuel mass flow	gms/sec	1.01	0.82	0.65	0.50	0.41
B.S.F.C.	gms/KW/hr	508.1	464.8	453.0	422.9	468.2
Thermal efficiency	%	18.2	19.9	20.5	21.9	19.8
Fuel temperature	deg C	37.0	37.0	38.0	37.0	37.0
Pump delivery/stroke	mm ³ mgms	24.1 19.9	22.7 18.7	22.1 18.2	21.6 17.8	24.1 19.9
Start of injection deg.	max min mean	13.2 13.1 13.2	12.6 11.9 12.1	12.1 11.8 12.0	17.5 17.2 17.3	18.1 17.3 17.7
Start of combustion deg.	max min mean	1.4 1.0 1.1	2.9 2.0 2.2	3.0 2.9 2.9	9.2 9.1 9.1	10.9 10.1 10.3
Ignition delay	deg max min mean	12.2 11.8 12.0	10.5 9.0 9.9	9.2 8.9 9.0	8.3 8.1 8.2	7.9 7.2 7.4
Ignition delay	ms max min mean	0.992 0.964 0.982	1.008 0.865 0.943	1.073 1.032 1.050	1.235 1.204 1.215	1.585 1.436 1.479
Max. cylinder pressure	bar	60.5	60.7	59.1	64.9	65.5
Max. pressure rise	bar/deg bar/ms	7.5 92.1	7.8 92.1	7.8 66.9	9.2 61.8	10.1 50.4
Oil temperature	deg C	88.0	87.0	88.0	83.0	82.0
Water IN temperature	deg C	47.0	51.0	53.0	52.0	53.0
Water OUT temperature	deg C	79.0	78.0	77.0	78.0	65.0
Exhaust temperature	deg C	137.0	165.0	148.0	133.0	129.0

ENGINE TEST RESULTS

PAGE 24

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2960

FUEL
 EMULSION : E20/.410N
 DENSITY Kg/l : 0.845
 CAL VALUE MJ/Kg : 38.83

DATE : 22/3/85
 TEST ID : UNIDO_6

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)

800

IDLE CONDITION

20 deg BTDC

Observed load	N	0.31
Observed torque	NM	2.5
Observed speed	RPM	823
Observed power	KW	.2
Air temperature	deg C	26.0
Barometric pressure	mBar	1021.5
Correction factor		0.985
Corrected torque	NM	2.5
Corrected power	KW	.2
Fuel consumed	gms	15.6
Measurement time	seconds	73.380
Fuel mass flow	gms/sec	0.21
B.S.F.C.	gms/KW/hr	3579.1
Thermal efficiency	%	2.6
Fuel temperature	deg C	37.0
Pump delivery/stroke	mm ³	12.5
	mgms	10.3
Start of injection deg.	max	16.5
	min	15.1
	mean	15.8
Start of combustion deg.	max	9.1
	min	7.7
	mean	8.5
Ignition delay	deg	max : 7.5
		min : 7.1
		mean : 7.3
Ignition delay	ms	max : 1.516
		min : 1.447
		mean : 1.478
Max. cylinder pressure	bar	55.2
Max. pressure rise	bar/deg	6.9
	bar/ms	33.8
Oil temperature	deg C	78.0
Water IN temperature	deg C	59.0
Water OUT temperature	deg C	76.0
Exhaust temperature	deg C	92.0

ENGINE TEST RESULTS

PAGE 25

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 DISTILLATE : DIST 100
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 42.75

DATE : 10/5/85
 TEST ID : UNID010

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000		1700		1400		1100		800	
	100 % LOAD (Nominal)		20 deg BTDC							
Observed load	N :	18.09	19.13	19.24	19.47	19.48				
Observed torque	NM :	144.8	153.2	154.1	155.9	155.9				
Observed speed	RPM :	2054	1750	1432	1149	844				
Observed power	KW :	31.2	28.1	23.1	18.2	13.8				
Air temperature	deg C :	31.0	31.0	30.0	30.0	29.0				
Barometric pressure	mBar :	1023.2	1023.2	1023.2	1023.1	1023.1				
Correction factor		0.992	0.992	0.990	0.990	0.989				
Corrected torque	NM :	143.7	151.9	152.5	154.4	154.2				
Corrected power	KW :	30.9	27.8	22.9	18.6	13.6				
Fuel consumed	gms :	83.5	85.9	89.7	91.3	90.1				
Measurement time	seconds :	29.590	34.590	42.190	52.590	71.580				
Fuel mass flow	gms/sec :	2.82	2.48	2.13	1.74	1.26				
B.S.F.C.	gms/KW/hr :	328.8	321.1	334.6	360.5	332.5				
Thermal efficiency	% :	25.6	26.2	25.2	25.0	25.3				
Fuel temperature	deg C :	30.0	32.0	32.0	31.0	31.0				
Pump delivery/stroke	mm ³ :	65.8	68.1	71.2	72.4	71.5				
	mgms :	55.0	56.8	59.4	60.4	59.6				
Start of injection deg.	max :	21.2	21.9	22.8	23.6	19.9				
	min :	20.3	21.8	22.7	23.5	19.3				
	mean :	20.8	21.9	22.7	23.5	19.8				
Start of combustion deg.	max :	10.0	11.0	12.8	14.6	12.8				
	min :	9.1	10.9	12.7	13.8	12.7				
	mean :	9.5	10.9	12.8	14.4	12.7				
Ignition delay	deg									
	max :	12.0	11.0	10.0	9.8	7.2				
	min :	10.9	10.9	9.9	8.9	6.6				
	mean :	11.4	10.9	10.0	9.2	7.1				
Ignition delay	ms									
	max :	0.975	1.046	1.170	1.419	1.431				
	min :	0.892	1.033	1.151	1.297	1.295				
	mean :	0.924	1.040	1.159	1.329	1.397				
Max. cylinder pressure	bar :	95.4	99.0	99.5	101.0	95.7				
Max. pressure rise	bar/deg :	15.5	16.3	15.7	14.6	12.1				
	bar/ms :	191.5	171.1	134.5	101.0	61.1				
Oil temperature	deg C :	86.0	92.0	93.0	92.0	90.0				
Water IN temperature	deg C :	63.0	67.0	69.0	69.0	64.0				
Water OUT temperature	deg C :	85.0	85.0	84.0	84.0	84.0				
Exhaust temperature	deg C :	420.0	415.0	405.0	368.0	327.0				

ENGINE TEST RESULTS

PAGE 26

DATE : 10/5/85
TEST ID : UNID010ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2960FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000		1700		1400		1100		800	
	67 % LOAD (Nominal)				20 deg BTDC					
Observed load	N	11.22	11.10	11.13	11.27	11.19				
Observed torque	NM	89.8	88.9	89.1	90.2	89.6				
Observed speed	RPM	2050	1747	1447	1136	833				
Observed power	KW	19.3	16.3	13.5	10.7	7.8				
Air temperature	deg C	30.0	29.0	29.0	30.0	28.0				
Barometric pressure	mBar	1022.1	1022.2	1022.2	1022.2	1022.2				
Correction factor		0.991	0.989	0.989	0.991	0.987				
Corrected torque	NM	89.0	87.9	88.1	89.4	88.4				
Corrected power	KW	19.1	16.1	13.4	10.6	7.7				
Fuel consumed	gms	45.8	44.6	43.5	46.6	43.1				
Measurement time	seconds	29.590	34.790	41.790	53.190	72.380				
Fuel mass flow	gms/sec	1.55	1.28	1.04	0.88	0.68				
B.S.F.C.	gms/KW/hr	291.7	286.9	280.5	296.6	316.5				
Thermal efficiency	%	28.9	29.4	30.0	28.4	26.6				
Fuel temperature	deg C	32.0	32.0	33.0	33.0	33.0				
Pump delivery/stroke	mm ³ /mgms	36.2	35.2	34.5	37.0	39.1				
		30.2	29.4	28.8	30.9	32.6				
Start of injection deg.	max	15.8	16.5	18.1	20.0	18.1				
	min	15.6	16.4	17.3	19.2	17.3				
	mean	15.7	16.4	17.5	19.7	17.7				
Start of combustion deg.	max	5.5	7.4	9.1	11.8	11.0				
	min	4.6	6.5	8.2	11.0	10.9				
	mean	4.9	6.9	8.6	11.5	11.0				
Ignition delay deg.	max	11.2	9.9	9.2	8.9	7.2				
	min	10.1	9.0	8.3	7.5	6.4				
	mean	10.8	9.6	8.9	8.2	6.7				
Ignition delay ms	max	0.908	0.949	1.054	1.305	1.431				
	min	0.818	0.854	0.958	1.099	1.283				
	mean	0.881	0.914	1.025	1.201	1.344				
Max. cylinder pressure	bar	73.4	76.0	78.0	83.5	79.8				
Max. pressure rise	bar/deg	10.1	10.4	10.7	12.7	9.1				
	bar/ms	124.8	108.9	92.9	86.9	45.6				
Oil temperature	deg C	89.0	89.0	89.0	87.0	85.0				
Water IN temperature	deg C	51.0	44.0	43.0	42.0	44.0				
Water OUT temperature	deg C	80.0	78.0	79.0	80.0	79.0				
Exhaust temperature	deg C	279.0	242.0	225.0	211.0	200.0				

ENGINE TEST RESULTS

PAGE 27

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 DISTILLATE : DIST 100
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 42.75

DATE : 10/5/85
 TEST ID : UNID010

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	33 % LOAD (Nominal)		20 deg BTDC				
Observed load	N	4.35	4.16	4.46	4.61	4.58	
Observed torque	NM	34.8	33.3	35.7	36.3	36.6	
Observed speed	RPM	2044	1732	1436	1127	843	
Observed power	KW	7.5	6.0	5.4	4.4	3.2	
Air temperature	deg C	28.0	28.0	28.0	28.0	28.0	
Barometric pressure	mBar	1022.2	1022.2	1022.2	1022.2	1022.2	
Correction factor		0.987	0.987	0.987	0.987	0.987	
Connected torque	NM	34.4	32.9	35.3	36.4	36.2	
Connected power	KW	7.4	6.0	5.3	4.3	3.2	
Fuel consumed	gms	27.7	25.7	25.5	28.3	29.1	
Measurement time	seconds	29.790	34.990	42.190	53.590	71.580	
Fuel mass flow	gms/sec	0.93	0.73	0.60	0.53	0.41	
B.S.F.C.	gms/KW/hr	454.5	442.8	410.3	442.1	458.0	
Thermal efficiency	%	18.5	19.0	20.5	19.0	18.4	
Fuel temperature	deg C	32.0	33.0	33.0	33.0	32.0	
Pump delivery/stroke	mm ³	21.8	20.4	20.2	22.5	23.1	
	mgms	18.2	17.0	16.8	18.7	19.3	
Start of injection deg.	max	13.2	12.9	14.8	19.2	17.2	
	min	11.2	12.2	14.6	17.3	16.4	
	mean	12.4	12.6	14.7	17.5	16.7	
Start of combustion deg.	max	2.0	3.0	5.7	10.0	10.0	
	min	1.1	2.1	5.5	9.1	10.0	
	mean	1.4	2.6	5.6	9.3	10.0	
Ignition delay	deg	max	11.9	10.6	9.2	8.3	7.2
	min	10.0	9.3	8.9	8.2	6.3	
	mean	11.0	10.0	9.0	8.2	6.7	
Ignition delay	ms	max	0.969	1.024	1.062	1.230	1.431
	min	0.818	0.900	1.032	1.207	1.253	
	mean	0.898	0.966	1.049	1.214	1.331	
Max. cylinder pressure	bar	60.1	59.4	63.2	68.2	66.4	
Max. pressure rise	bar/deg	6.1	6.9	8.3	10.1	9.4	
	bar/ms	74.9	71.7	71.9	68.3	47.4	
Oil temperature	deg C	86.0	86.0	86.0	84.0	83.0	
Water IN temperature	deg C	39.0	42.0	52.0	53.0	57.0	
Water OUT temperature	deg C	77.0	77.0	78.0	82.0	79.0	
Exhaust temperature	deg C	187.0	165.0	151.0	142.0	136.0	

ENGINE TEST RESULTS

PAGE 28

DATE : 10/5/85
TEST ID : UNID010ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2960FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
		IDLE CONDITION
		20 deg BTDC
Observed load	N :	0.38
Observed torque	NM :	3.0
Observed speed	RPM :	819
Observed power	KW :	.3
Air temperature	deg C :	28.0
Barometric pressure	mBar :	1022.2
Correction factor		0.987
Corrected torque	NM :	3.0
Corrected power	KW :	.3
Fuel consumed	gms :	14.5
Measurement time	seconds :	73.580
Fuel mass flow	gms/sec :	0.20
B.S.F.C.	gms/KW/hr :	2788.2
Thermal efficiency	% :	3.0
Fuel temperature	deg C :	32.0
Pump delivery/stroke	mm ³ :	11.5
	mgms :	9.6
Start of injection deg.	max :	17.2
	min :	14.9
	mean :	16.1
Start of combustion deg.	max :	9.2
	min :	7.5
	mean :	8.6
Ignition delay	deg max :	8.1
	min :	7.0
	mean :	7.4
Ignition delay	ms max :	1.047
	min :	1
	mean :	2
Max. cylinder pressure	bar :	10.9
Max. pressure rise	bar/deg :	7.7
	bar/ms :	37.6
Oil temperature	deg C :	81.0
Water IN temperature	deg C :	67.0
Water OUT temperature	deg C :	65.0
Exhaust temperature	deg C :	97.0

ENGINE TEST RESULTS

PAGE 29

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 10:05:85
TEST ID : UNID011

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	900	
	100 % LOAD (Nominal)		26 deg BTDC			
Observed load	N :	16.30	17.77	17.75	18.04	18.30
Observed torque	NM :	130.5	142.3	142.1	144.5	146.5
Observed speed	RPM :	2050	1744	1435	1136	826
Observed power	KW :	28.0	26.0	21.4	17.2	12.7
Air temperature	deg C :	30.0	31.0	30.0	30.0	29.0
Barometric pressure	mBar :	1022.2	1022.2	1022.2	1022.2	1022.2
Correction factor	:	0.991	0.992	0.991	0.991	0.989
Corrected torque	NM :	129.3	141.2	140.8	143.1	144.9
Corrected power	KW :	27.8	25.8	21.2	17.0	12.5
Fuel consumed	gms :	80.4	86.1	89.2	91.1	89.7
Measurement time	seconds :	29.590	34.790	42.190	53.190	72.980
Fuel mass flow	gms/sec :	2.72	2.47	2.11	1.71	1.23
B.S.F.C.	gms/KW/hr :	352.5	345.5	359.8	362.2	353.0
Thermal efficiency	% :	23.9	24.4	23.4	23.3	23.9
Fuel temperature	deg C :	32.0	32.0	33.0	32.0	33.0
Pump delivery/stroke	mm ³ :	63.6	68.1	70.8	72.3	71.4
	mgms :	53.0	56.8	58.9	60.3	59.5
Start of injection deg.	max :	25.6	27.5	28.1	28.1	22.7
	min :	25.5	27.2	27.3	28.0	22.0
	mean :	25.6	27.3	27.7	28.1	22.4
Start of combustion deg.	max :	12.7	14.5	15.4	16.4	14.6
	min :	11.9	13.6	15.3	16.3	14.6
	mean :	12.5	13.8	15.4	16.4	14.6
Ignition delay	deg max :	13.7	13.9	12.7	11.8	8.0
	min :	12.8	12.7	12.0	11.6	7.4
	mean :	13.1	13.5	12.4	11.6	7.8
Ignition delay	ms max :	1.116	1.322	1.470	1.726	1.618
	min :	1.044	1.215	1.390	1.696	1.490
	mean :	1.063	1.288	1.437	1.709	1.567
Max. cylinder pressure	bar :	99.5	102.0	102.7	101.8	96.7
Max. pressure rise	bar/deg :	22.0	20.2	19.1	21.6	13.7
	bar/ms :	270.0	211.5	164.3	147.1	68.1
Oil temperature	deg C :	84.0	89.0	90.0	89.0	88.0
Water IN temperature	deg C :	64.0	71.0	74.0	74.0	72.0
Water OUT temperature	deg C :	83.0	84.0	84.0	84.0	83.0
Exhaust temperature	deg C :	110.0	112.0	117.0	115.0	114.0

ENGINE TEST RESULTS

PAGE 30

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 10.05.85
TEST ID : UNID011

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	67 % LOAD (Nominal)		28 deg BTDC				
Observed load	N :	11.46	10.84	11.38	11.45	11.27	
Observed torque	NM :	91.8	86.8	91.1	91.6	90.2	
Observed speed	RPM :	2050	1738	1432	1152	815	
Observed power	KW :	19.7	15.8	13.7	11.1	7.7	
Air temperature	deg C :	29.0	29.0	30.0	29.0	29.0	
Barometric pressure	mBar :	1022.2	1022.2	1022.2	1022.2	1022.2	
Correction factor		0.989	0.989	0.991	0.989	0.989	
Corrected torque	NM :	90.8	85.9	90.3	90.6	89.3	
Corrected power	KW :	19.5	15.6	13.5	10.9	7.6	
Fuel consumed	gms :	48.4	45.1	47.8	48.3	53.4	
Measurement time	seconds :	29.590	34.790	42.190	52.390	73.980	
Fuel mass flow	gms/sec :	1.64	1.30	1.13	0.92	0.72	
B.S.F.C.	gms/KW/hr :	302.2	298.5	301.3	303.5	341.1	
Thermal efficiency	% :	27.9	28.2	27.9	27.7	24.7	
Fuel temperature	deg C :	33.0	33.0	34.0	34.0	33.0	
Pump delivery/stroke	mm ³ :	38.3	35.8	38.0	38.5	42.5	
	mgms :	31.9	29.8	31.6	32.0	35.4	
Start of injection deg.	max :	21.2	21.9	23.7	24.5	22.7	
	min :	20.8	21.7	23.5	24.4	22.6	
	mean :	21.1	21.8	23.6	24.5	22.7	
Start of combustion deg.	max :	9.1	10.9	12.7	14.6	14.6	
	min :	9.0	10.0	12.7	14.5	14.5	
	mean :	9.1	10.7	12.7	14.5	14.6	
Ignition delay	deg	max :	12.0	11.9	11.0	10.0	8.2
	min :	11.8	10.8	10.8	9.9	8.0	
	mean :	12.0	11.1	10.9	9.9	8.1	
Ignition delay	ms	max :	0.979	1.137	1.280	1.444	1.677
	min :	0.959	1.035	1.256	1.430	1.635	
	mean :	0.972	1.068	1.268	1.437	1.663	
Max. cylinder pressure	bar :	80.3	82.3	85.2	86.0	84.2	
Max. pressure rise	bar/deg :	12.5	13.9	14.1	15.2	13.5	
	bar/ms :	153.6	144.6	120.9	104.8	66.0	
Oil temperature	deg C :	90.0	91.0	91.0	88.0	87.0	
Water IN temperature	deg C :	63.0	54.0	50.0	48.0	47.0	
Water OUT temperature	deg C :	80.0	79.0	79.0	79.0	79.0	
Exhaust temperature	deg C :	297.0	250.0	239.0	220.0	212.0	

ENGINE TEST RESULTS

PAGE 31

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 10:05:85
TEST ID : UNID011

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	33 % LOAD (Nominal)		26 deg BTDC			
Observed load	N :	4.66	4.18	4.25	4.42	4.51
Observed torque	NM :	37.3	33.5	34.0	35.3	36.1
Observed speed	RPM :	2046	1744	1425	1129	822
Observed power	KW :	8.0	6.1	5.1	4.2	3.1
Air temperature	deg C :	29.0	28.0	28.0	28.0	28.0
Barometric pressure	mBar :	1022.2	1022.2	1022.2	1022.2	1022.2
Correction factor	:	0.989	0.987	0.987	0.987	0.987
Corrected torque	NM :	36.9	33.1	33.6	34.9	35.7
Corrected power	KW :	7.9	6.0	5.0	4.1	3.1
Fuel consumed	gms :	29.4	26.1	25.9	26.3	26.7
Measurement time	seconds :	29.790	34.790	42.390	53.390	73.380
Fuel mass flow	gms/sec :	0.99	0.75	0.61	0.49	0.36
B.S.F.C.	gms/KW/hr :	448.9	447.1	439.0	429.6	426.7
Thermal efficiency	% :	18.8	18.8	19.2	19.6	19.7
Fuel temperature	deg C :	33.0	33.0	33.0	33.0	33.0
Pump delivery/stroke	mm ³ :	23.2	20.7	20.6	20.9	21.3
	mgms :	19.3	17.2	17.1	17.4	17.7
Start of injection deg.	max :	18.6	17.5	20.0	22.7	20.9
	min :	17.7	17.3	19.9	21.8	20.8
	mean :	18.1	17.5	20.0	22.5	20.9
Start of combustion deg.	max :	5.7	6.5	9.2	12.7	12.7
	min :	5.5	6.4	9.1	11.8	12.7
	mean :	5.6	6.5	9.1	12.2	12.7
Ignition delay	deg max :	13.1	11.1	10.9	10.8	8.2
	min :	12.0	10.8	10.8	9.9	8.1
	mean :	12.5	11.0	10.8	10.3	8.1
Ignition delay	ms max :	1.067	1.056	1.273	1.598	1.659
	min :	0.977	1.037	1.261	1.464	1.649
	mean :	1.015	1.051	1.267	1.522	1.653
Max. cylinder pressure	bar :	66.9	64.0	66.9	69.6	67.2
Max. pressure rise	bar/deg :	8.3	7.5	9.6	10.8	9.1
	bar/ms :	101.9	78.6	81.9	73.5	45.0
Oil temperature	deg C :	87.0	87.0	87.0	85.0	84.0
Water IN temperature	deg C :	41.0	37.0	35.0	38.0	43.0
Water OUT temperature	deg C :	78.0	77.0	77.0	77.0	77.0
Exhaust temperature	deg C :	193.0	168.0	151.0	136.0	108.0

ENGINE TEST RESULTS

PAGE 32

DATE : 10:05:85
TEST ID : UNID011ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DYNQ TORQUE FACTOR : 35.81

ENGINE SPEED (NOMINAL)		800
IDLE CONDITION		26 deg BTDC
Observed load	N	0.37
Observed torque	NM	2.9
Observed speed	RPM	826
Observed power	KW	.3
Air temperature	deg C	27.0
Barometric pressure	mBar	1022.2
Correction factor		0.986
Corrected torque	NM	2.9
Corrected power	KW	.3
Fuel consumed	gms	14.3
Measurement time	seconds	72.990
Fuel mass flow	gms/sec	0.20
R.S.F.C.	gms/KW/hr	2811.5
Thermal efficiency	%	3.0
Fuel temperature	deg C	32.0
Pump delivery/stroke	mm ³	11.4
	mgms	9.5
Start of injection deg.	max	21.6
	min	19.8
	mean	20.2
Start of combustion deg.	max	11.8
	min	10.9
	mean	11.1
Ignition delay	deg	max : 9.8
		min : 8.8
		mean : 9.1
Ignition delay	ms	max : 1.980
		min : 1.773
		mean : 1.842
Max. cylinder pressure	bar	52.4
Max. pressure rise	bar/deg	5.3
	bar/ms	26.5
Oil temperature	deg C	81.0
Water IN temperature	deg C	47.0
Water OUT temperature	deg C	75.0
Exhaust temperature	deg C	99.0

ENGINE TEST RESULTS

PAGE 30

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 DISTILLATE : DIST 100
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 42.75

DATE : 10:05:85
 TEST ID : UNID012

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	100 % LOAD (Nominal)		14 deg BTDC		
Observed load	N : 19.05	20.42	20.76	20.85	20.58
Observed torque	NM : 152.5	163.5	166.2	166.9	164.7
Observed speed	RPM : 2052	1711	1428	1137	825
Observed power	KW : 32.3	29.3	24.9	19.9	14.2
Air temperature	deg C : 29.0	31.0	30.0	31.0	29.0
Barometric pressure	mBar : 1022.3	1022.2	1022.2	1022.3	1022.2
Correction factor	: 0.989	0.992	0.991	0.992	0.989
Corrected torque	NM : 150.9	162.2	164.7	165.6	162.9
Corrected power	KW : 32.4	29.1	24.6	19.7	14.1
Fuel consumed	gms : 80.1	86.0	89.1	91.3	89.8
Measurement time	seconds : 29.590	35.390	42.390	53.190	72.980
Fuel mass flow	gms/sec : 2.71	2.43	2.10	1.72	1.23
B.S.F.C.	gms/KW/hr : 300.6	301.0	307.2	313.3	314.5
Thermal efficiency	% : 28.0	28.0	27.4	26.9	26.8
Fuel temperature	deg C : 32.0	33.0	32.0	34.0	33.0
Pump delivery/stroke	mm ³ : 63.3	68.2	70.6	72.6	71.6
	mgms : 52.8	56.8	58.9	60.4	59.6
Start of injection deg.	max : 14.0	15.6	16.4	16.4	11.0
	min : 13.9	14.8	15.7	16.4	10.1
	mean : 13.9	15.4	16.2	16.4	10.5
Start of combustion deg.	max : 4.7	7.3	8.3	10.0	5.6
	min : 4.5	6.5	8.2	9.2	5.5
	mean : 4.6	7.0	8.2	9.5	5.6
Ignition delay deg.	max : 9.4	9.0	8.2	7.2	5.4
	min : 9.2	8.1	7.4	6.4	4.6
	mean : 9.3	8.4	8.0	6.9	4.9
Ignition delay ms	max : 0.766	0.880	0.955	1.058	1.095
	min : 0.749	0.793	0.865	0.937	0.930
	mean : 0.758	0.822	0.933	1.008	0.993
Max. cylinder pressure	bar : 91.5	88.0	89.8	90.8	79.9
Max. pressure rise	bar/deg : 11.2	11.3	11.0	9.5	7.0
	bar/ms : 137.9	115.7	94.6	65.1	34.7
Oil temperature	deg C : 87.0	89.0	89.0	89.0	86.0
Water IN temperature	deg C : 59.0	67.0	68.0	69.0	65.0
Water OUT temperature	deg C : 82.0	83.0	81.0	82.0	81.0
Exhaust temperature	deg C : 424.0	420.0	408.0	354.0	319.0

ENGINE TEST RESULTS

PAGE 34

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2960

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 10-05-85
TEST ID : UNID012

DYN0 TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	67 % LOAD (Nominal)		14 deg BTDC		
Observed load	N : 11.07	10.97	11.15	11.55	11.93
Observed torque	NM : 89.7	87.8	89.2	92.4	95.5
Observed speed	RPM : 2050	1740	1450	1136	813
Observed power	KW : 19.0	16.0	13.6	11.0	8.1
Air temperature	deg C : 30.0	29.0	29.0	28.0	28.0
Barometric pressure	mBar : 1022.3	1022.3	1022.3	1022.3	1022.3
Correction factor	0.991	0.989	0.989	0.987	0.987
Corrected torque	NM : 87.8	86.8	88.3	91.3	94.3
Corrected power	KW : 18.9	15.8	13.4	10.9	8.0
Fuel consumed	gms : 45.9	43.5	43.7	45.7	48.2
Measurement time	seconds : 29.590	34.790	41.790	53.190	74.180
Fuel mass flow	gms/sec : 1.55	1.25	1.05	0.86	0.65
B.S.F.C.	gms/KW/hr : 296.2	284.4	280.9	284.9	291.4
Thermal efficiency	% : 28.4	29.6	30.0	29.6	29.9
Fuel temperature	deg C : 34.0	34.0	34.0	34.0	33.0
Pump delivery/stroke	mm ³ : 36.4	34.5	34.7	36.4	38.4
	mgms : 30.3	28.7	28.8	30.3	32.0
Start of injection deg.	max : 9.3	10.2	11.0	13.7	10.9
	min : 8.6	10.2	10.9	12.7	10.2
	mean : 9.1	10.2	11.0	13.0	10.6
Start of combustion deg.	max : -0.6	1.3	3.1	6.6	5.6
	min : -1.7	1.0	2.9	6.4	5.5
	mean : -1.4	1.1	2.9	6.5	5.6
Ignition delay	deg max : 11.0	9.2	8.2	7.2	5.4
	min : 9.9	8.9	7.8	6.3	4.6
	mean : 10.5	9.1	8.0	6.5	5.0
Ignition delay	ms max : 0.892	0.881	0.937	1.051	1.107
	min : 0.803	0.856	0.896	0.919	0.946
	mean : 0.856	0.869	0.923	0.951	1.035
Max. cylinder pressure	bar : 60.3	64.7	66.8	74.2	69.1
Max. pressure rise	bar/deg : 7.1	7.7	8.2	10.0	8.2
	bar/ms : 87.7	80.6	71.6	68.2	40.2
Oil temperature	deg C : 88.0	89.0	89.0	87.0	84.0
Water IN temperature	deg C : 49.0	45.0	43.0	41.0	40.0
Water OUT temperature	deg C : 79.0	78.0	78.0	78.0	77.0
Exhaust temperature	deg C : 278.0	248.0	229.0	211.0	199.0

ENGINE TEST RESULTS

PAGE 35

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 10:05:85
TEST ID : UNID012

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800
		33 % LOAD (Nominal)		14 deg BTDC		
Observed load	N :	4.68	3.96	4.55	4.44	4.25
Observed torque	NM :	37.5	31.7	36.4	35.5	34.0
Observed speed	RPM :	2031	1745	1430	1133	797
Observed power	KW :	8.0	5.8	5.4	4.2	2.8
Air temperature	deg C :	28.0	29.0	28.0	28.0	27.0
Barometric pressure	mBar :	1022.3	1022.3	1022.2	1022.2	1022.2
Correction factor	:	0.987	0.989	0.987	0.987	0.986
Corrected torque	NM :	37.0	31.4	35.9	35.1	33.5
Corrected power	KW :	7.9	5.7	5.4	4.2	2.8
Fuel consumed	gms :	29.3	25.2	26.1	27.3	26.9
Measurement time	seconds :	29.990	34.790	42.390	53.390	75.750
Fuel mass flow	gms/sec :	0.98	0.72	0.62	0.51	0.36
B.S.F.C.	gms/KW/hr :	446.9	454.9	411.9	442.4	457.0
Thermal efficiency	% :	18.8	18.5	20.4	19.0	18.4
Fuel temperature	deg C :	34.0	34.0	34.0	33.0	32.0
Pump delivery/stroke	mm ³ :	23.1	20.0	20.7	21.7	21.4
	mgms :	19.2	16.6	17.2	18.1	17.8
Start of injection deg.	max :	7.6	6.4	8.4	11.0	10.0
	min :	5.9	5.7	8.2	10.9	9.2
	mean :	6.9	5.9	8.3	11.0	9.5
Start of combustion deg.	max :	-5.0	-4.1	.3	4.7	4.6
	min :	-5.7	-5.1	-6	3.8	3.7
	mean :	-5.4	-4.5	-1	4.0	4.0
Ignition delay	deg max :	12.7	10.8	8.9	7.2	6.1
	min :	11.6	9.9	8.0	6.3	4.9
	mean :	12.3	10.4	8.4	7.0	5.5
Ignition delay	ms max :	1.039	1.032	1.041	1.060	1.277
	min :	0.954	0.948	0.933	0.929	1.025
	mean :	1.012	0.989	0.982	1.026	1.148
Max. cylinder pressure	bar :	49.3	49.9	56.6	61.7	58.2
Max. pressure rise	bar/deg :	3.4	3.9	6.8	8.1	7.7
	bar/ms :	41.0	40.3	58.4	55.3	36.7
Oil temperature	deg C :	87.0	87.0	86.0	84.0	82.0
Water IN temperature	deg C :	34.0	34.0	35.0	41.0	51.0
Water OUT temperature	deg C :	77.0	77.0	76.0	76.0	77.0
Exhaust temperature	deg C :	200.0	160.0	154.0	142.0	129.0

ENGINE TEST RESULTS

PAGE 36

DATE : 10/05/85
TEST ID : UNID012ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2960FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
IDLE CONDITION		14 deg BTDC
Observed load	N	0.35
Observed torque	NM	2.8
Observed speed	RPM	828
Observed power	KW	.2
Air temperature	deg C	27.0
Barometric pressure	mBar	1022.3
Correction factor		0.986
Corrected torque	NM	2.8
Corrected power	KW	.2
Fuel consumed	gms	13.7
Measurement time	seconds	72.750
Fuel mass flow	gms/sec	0.19
B.S.F.C.	gms/KW/hr	2826.4
Thermal efficiency	%	3.0
Fuel temperature	deg C	32.0
Pump delivery/stroke	mm ³	10.9
	mgms	9.1
Start of injection deg.	max	10.0
	min	8.2
	mean	9.1
Start of combustion deg.	max	3.8
	min	2.0
	mean	2.9
Ignition delay	deg max	6.3
	min	6.2
	mean	6.2
Ignition delay	ms max	1.274
	min	1.241
	mean	1.257
Max. cylinder pressure	bar	52.3
Max. pressure rise	bar/deg	6.3
	bar/ms	31.3
Oil temperature	deg C	79.0
Water IN temperature	deg C	52.0
Water OUT temperature	deg C	75.0
Exhaust temperature	deg C	34.0

ENGINE TEST RESULTS

PAGE 37

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDN3.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DATE : 10/05/85
TEST ID : UNID013

DYNO TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	100 % LOAD (Nominal)		14 deg BTDC				
Observed load	N	18.58	19.58	19.90	19.86	19.23	
Observed torque	NM	148.7	158.7	159.3	157.4	154.0	
Observed speed	RPM	2031	1709	1446	1132	828	
Observed power	KW	31.6	29.0	24.1	18.7	13.3	
Air temperature	deg C	29.0	30.0	30.0	30.0	29.0	
Barometric pressure	mBar	1022.2	1022.2	1022.2	1022.2	1022.5	
Correction factor		0.989	0.991	0.991	0.991	0.989	
Corrected torque	NM	147.1	155.3	157.9	155.9	152.3	
Corrected power	KW	31.3	27.8	23.9	18.5	13.1	
Fuel consumed	gms	81.6	86.2	99.0	91.0	87.0	
Measurement time	seconds	29.990	35.390	41.990	53.890	73.180	
Fuel mass flow	gms/sec	2.72	2.44	2.12	1.70	1.19	
B.S.F.C.	gms/KW/hr	313.1	315.5	319.2	332.1	326.0	
Thermal efficiency	%	29.9	29.5	29.2	29.1	28.6	
Fuel temperature	deg C	30.0	30.0	30.0	32.0	32.0	
Pump delivery/stroke	mm ³	64.1	68.2	70.2	72.3	69.3	
	mgms	53.6	57.0	58.6	60.2	57.8	
Start of injection deg.	max	13.9	15.6	16.4	17.3	11.9	
	min	13.7	14.7	15.5	16.5	11.8	
	mean	13.8	15.1	16.0	17.1	11.9	
Start of combustion deg.	max	4.8	7.4	8.4	10.1	6.6	
	min	4.6	6.5	8.2	10.0	6.5	
	mean	4.7	7.1	8.2	10.1	6.6	
Ignition delay	deg	max	8.3	8.2	7.3	5.3	
	min	9.0	7.3	7.1	6.5	5.2	
	mean	9.1	7.9	7.8	7.0	5.3	
Ignition delay	ms	max	0.763	0.811	0.941	1.069	1.077
	min	0.737	0.708	0.819	0.951	1.053	
	mean	0.750	0.771	0.895	1.035	1.065	
Max. cylinder pressure	bar	91.5	86.6	88.6	90.3	90.6	
Max. pressure rise	bar/deg	10.5	11.6	10.8	10.0	9.0	
	bar/ms	127.4	118.8	93.5	68.2	99.6	
Oil temperature	deg C	84.0	88.0	88.0	87.0	86.0	
Water IN temperature	deg C	46.0	58.0	62.0	64.0	67.0	
Water OUT temperature	deg C	80.0	80.0	80.0	81.0	81.0	
Exhaust temperature	deg C	376.0	393.0	378.0	340.0	370.0	

ENGINE TEST RESULTS

PAGE 39

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDN3.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DATE : 10 05 85
TEST ID : UNID013

DYN0 TORQUE FACTOR : 85.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	67 % LOAD (Nominal)		14 deg BTDC		
Observed load	NM : 10.82	11.36	11.52	11.51	11.61
Observed torque	NM : 86.6	90.9	92.3	92.2	92.9
Observed speed	RPM : 2042	1744	1440	1145	813
Observed power	KW : 18.5	16.6	13.9	11.0	7.9
Air temperature	deg C : 28.0	28.0	28.0	29.0	28.0
Barometric pressure	mBar : 1022.5	1022.5	1022.5	1022.5	1022.5
Correction factor	: 0.987	0.987	0.987	0.989	0.987
Corrected torque	NM : 85.8	89.8	91.1	91.2	91.7
Corrected power	KW : 18.3	16.4	13.7	10.9	7.8
Fuel consumed	gms : 49.5	49.0	49.0	49.4	52.2
Measurement time	seconds : 29.790	34.790	42.000	52.790	74.180
Fuel mass flow	gms/sec : 1.66	1.41	1.17	0.94	0.70
B.S.F.C.	gms/KW/hr : 327.1	309.4	305.8	308.4	324.4
Thermal efficiency	% : 28.5	30.1	30.5	30.2	28.7
Fuel temperature	deg C : 32.0	32.0	32.0	32.0	32.0
Pump delivery/stroke	mm ³ : 39.0	38.8	38.9	39.2	41.5
	mgms : 32.5	32.3	32.4	32.7	34.6
Start of injection deg.	max : 9.3	11.1	12.1	13.6	12.7
	min : 8.5	10.3	11.2	12.9	12.1
	mean : 9.0	10.9	11.8	13.3	12.4
Start of combustion deg.	max : -1.7	2.0	4.0	6.5	7.4
	min : -1.4	2.0	3.7	6.4	7.3
	mean : -0.9	2.0	3.8	6.5	7.3
Ignition delay deg.	max : 10.0	9.2	8.4	7.1	5.3
	min : 9.2	8.3	7.5	6.4	4.8
	mean : 9.8	8.9	8.0	6.8	5.1
Ignition delay ms	max : 0.817	0.878	0.970	1.033	1.088
	min : 0.752	0.794	0.866	0.925	0.987
	mean : 0.803	0.848	0.930	0.989	1.040
Max. cylinder pressure	bar : 61.3	65.6	69.6	73.7	72.6
Max. pressure rise	bar/deg : 6.6	7.3	8.3	9.3	10.5
	bar/ms : 80.4	76.6	71.6	63.7	51.2
Oil temperature	deg C : 87.0	87.0	86.0	85.0	83.0
Water IN temperature	deg C : 53.0	47.0	43.0	41.0	40.0
Water OUT temperature	deg C : 78.0	78.0	77.0	77.0	77.0
Exhaust temperature	deg C : 277.0	248.0	229.0	209.0	197.0

ENGINE TEST RESULTS

PAGE 39

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : TEGDN3.9
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 38.62

DATE : 10/05/85
 TEST ID : UNID013

DYNQ TORQUE FACTOR 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	33 % LOAD (Nominal)		14 deg BTDC		
Observed load N :	4.09	4.08	4.28	4.54	4.75
Observed torque NM :	32.8	32.6	34.3	36.3	38.1
Observed speed RPM :	2044	1727	1432	1135	823
Observed power KW :	7.0	5.9	5.1	4.3	3.3
Air temperature deg C :	28.0	26.0	27.0	28.0	28.0
Barometric pressure mBar :	1022.5	1022.5	1022.5	1022.5	1022.5
Correction factor :	0.987	0.984	0.986	0.987	0.987
Corrected torque NM :	32.3	32.1	33.8	35.9	37.6
Corrected power KW :	6.9	5.8	5.1	4.3	3.2
Fuel consumed gms :	30.0	28.2	27.4	28.2	27.0
Measurement time seconds :	29.790	35.190	42.190	53.190	73.390
Fuel mass flow gms/sec :	1.01	0.80	0.65	0.53	0.37
B.S.F.C. gms/KW/hr :	523.6	496.5	461.7	447.6	409.3
Thermal efficiency % :	17.8	18.8	20.2	20.8	22.8
Fuel temperature deg C :	33.0	32.0	32.0	33.0	32.0
Pump delivery/stroke mm+3 :	23.7	22.3	21.8	22.4	21.5
mgms :	19.7	18.6	18.1	18.7	17.9
Start of injection deg. max :	6.5	5.8	5.7	11.1	11.7
min :	6.2	4.8	5.6	10.4	11.1
mean :	6.4	5.5	5.6	10.9	11.3
Start of combustion deg. max :	-5.2	-4.1	-2.9	3.9	6.4
min :	-6.6	-4.7	-3.5	3.7	5.6
mean :	-5.9	-4.3	-3.1	3.8	5.8
Ignition delay deg. max :	13.1	10.5	9.1	7.2	5.7
min :	11.6	9.1	8.5	6.6	5.3
mean :	12.3	9.9	8.8	7.1	5.5
Ignition delay ms. max :	1.067	1.014	1.057	1.063	1.160
min :	0.948	0.879	0.986	0.971	1.073
mean :	1.005	0.953	1.020	1.040	1.122
Max. cylinder pressure bar :	48.7	50.3	51.6	61.5	60.8
Max. pressure rise bar/deg :	3.6	4.1	4.5	7.6	9.2
bar/ms :	44.3	42.3	39.0	51.6	45.3
Oil temperature deg C :	85.0	85.0	84.0	83.0	81.0
Water IN temperature deg C :	35.0	34.0	39.0	44.0	53.0
Water OUT temperature deg C :	76.0	76.0	76.0	76.0	77.0
Exhaust temperature deg C :	190.0	168.0	150.0	137.0	126.0

ENGINE TEST RESULTS

PAGE 40

DATE : 10:05 85
TEST ID : UNID013ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860FUEL
EMULSION : TEGDN3.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
IDLE CONDITION		14 deg BTDC
Observed load	N	0.37
Observed torque	NM	3.0
Observed speed	RPM	824
Observed power	KW	.3
Air temperature	deg C	27.0
Barometric pressure	mBar	1022.5
Correction factor		0.986
Corrected torque	NM	2.9
Corrected power	KW	.3
Fuel consumed	gms	14.9
Measurement time	seconds	73.210
Fuel mass flow	gms/sec	0.20
B.S.F.C.	gms/KW/hr	2915.9
Thermal efficiency	%	3.2
Fuel temperature	deg C	32.0
Pump delivery/stroke	mm ³ mgms	11.9 9.9
Start of injection deg.	max	10.0
	min	9.2
	mean	9.7
Start of combustion deg.	max	4.7
	min	3.8
	mean	4.0
Ignition delay deg.	max	6.1
	min	5.4
	mean	5.7
Ignition delay ms	max	1.242
	min	1.083
	mean	1.152
Max. cylinder pressure	bar	52.1
Max. pressure rise	bar/deg	5.7
	bar/ms	28.3
Oil temperature	deg C	79.0
Water IN temperature	deg C	52.0
Water OUT temperature	deg C	75.0
Exhaust temperature	deg C	97.0

ENGINE TEST RESULTS

PAGE 41

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2960

FUEL
 EMULSION : TEGDN3.9
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 38.62

DATE 10/05/85
 TEST ID : UNID014

DYND TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	100 % LOAD (Nominal)		20 deg BTDC				
Observed load	N	17.46	18.77	18.98	19.02	18.64	
Observed torque	NM	139.8	150.3	152.0	152.3	149.2	
Observed speed	RPM	2027	1727	1435	1136	834	
Observed power	KW	29.7	27.2	22.8	18.1	13.0	
Air temperature	deg C	29.0	30.0	30.0	31.0	29.0	
Barometric pressure	mBar	1022.5	1022.5	1022.5	1022.5	1022.5	
Correction factor		0.989	0.991	0.991	0.992	0.989	
Corrected torque	NM	138.2	148.9	150.5	151.1	147.6	
Corrected power	KW	29.3	26.9	22.6	18.0	12.9	
Fuel consumed	gms	80.2	85.9	89.7	91.3	89.0	
Measurement time	seconds	29.930	35.190	42.190	53.190	72.380	
Fuel mass flow	gms/sec	2.67	2.44	2.13	1.72	1.23	
B.S.F.C.	gms/KW/hr	328.1	326.4	338.4	343.8	343.5	
Thermal efficiency	%	28.4	28.6	27.5	27.1	27.1	
Fuel temperature	deg C	32.0	32.0	32.0	33.0	32.0	
Pump delivery/stroke	mm ³	63.3	67.8	71.1	72.6	70.7	
	mgms	52.8	56.5	59.3	60.4	59.0	
Start of injection deg.	max	19.3	21.0	21.8	22.7	17.3	
	min	19.2	20.9	21.8	21.9	16.6	
	mean	19.2	20.9	21.8	22.2	17.1	
Start of combustion deg.	max	9.1	11.1	12.7	13.9	11.1	
	min	8.3	10.9	11.8	13.6	10.9	
	mean	8.6	11.0	12.1	13.7	11.0	
Ignition delay	deg	max	10.9	10.1	10.0	9.0	6.3
	min	10.1	9.8	9.1	8.2	5.6	
	mean	10.6	10.0	9.7	8.5	6.1	
Ignition delay	ms	max	0.838	0.970	1.161	1.319	1.265
	min	0.833	0.949	1.061	1.206	1.127	
	mean	0.873	0.963	1.125	1.250	1.228	
Max. cylinder pressure	bar	90.8	95.2	95.9	97.8	90.6	
Max. pressure rise	bar/deg	13.8	14.5	15.0	14.9	10.5	
	bar/ms	167.6	149.8	128.8	101.2	52.3	
Oil temperature	deg C	82.0	85.0	87.0	87.0	85.0	
Water IN temperature	deg C	46.0	59.0	63.0	65.0	63.0	
Water OUT temperature	deg C	80.0	81.0	81.0	82.0	81.0	
Exhaust temperature	deg C	361.0	372.0	372.0	345.0	305.0	

ENGINE TEST RESULTS

PAGE 42

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDNG.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DATE : 10 05 85
TEST ID : UNID0014

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000		1700		1400		1100		800	
	67 % LOAD (Nominal)		20 deg BTDC							
Observed load	N :	10.99	11.32	10.62	11.23	10.96				
Observed torque	NM :	88.0	90.6	85.0	89.9	87.8				
Observed speed	RPM :	2038	1745	1446	1132	819				
Observed power	KW :	18.8	16.6	12.9	10.7	7.5				
Air temperature	deg C :	29.0	29.0	29.0	28.0	28.0				
Barometric pressure	mBar :	1022.5	1022.5	1022.5	1022.5	1022.5				
Correction factor	:	0.989	0.989	0.989	0.987	0.987				
Corrected torque	NM :	87.0	89.6	84.1	89.8	86.7				
Corrected power	KW :	18.6	16.4	12.7	10.5	7.4				
Fuel consumed	gms :	50.8	49.0	46.8	48.0	52.0				
Measurement time	seconds :	29.790	34.790	41.790	53.390	73.580				
Fuel mass flow	gms/sec :	1.71	1.41	1.12	0.90	0.71				
B.S.F.C.	gms/KW/hr :	330.7	309.6	316.8	307.7	342.4				
Thermal efficiency	% :	29.2	30.1	29.4	30.3	27.2				
Fuel temperature	deg C :	32.0	33.0	32.0	32.0	32.0				
Pump delivery/stroke	mm ³ :	40.1	38.8	37.2	38.1	41.4				
	mgms :	33.5	32.3	31.0	31.8	34.5				
Start of injection deg.	max :	14.9	16.5	17.3	18.9	18.2				
	min :	14.7	15.5	16.5	18.2	17.2				
	mean :	14.8	16.0	17.1	18.4	17.6				
Start of combustion deg.	max :	4.7	7.3	8.3	11.1	11.0				
	min :	3.7	6.4	8.2	10.9	10.9				
	mean :	4.1	6.6	8.3	11.0	11.0				
Ignition delay	deg max :	11.0	10.0	9.1	7.9	7.3				
	min :	10.2	9.1	8.3	7.1	6.2				
	mean :	10.7	9.3	8.8	7.4	6.6				
Ignition delay	ms max :	0.900	0.953	1.047	1.170	1.476				
	min :	0.835	0.868	0.957	1.047	1.270				
	mean :	0.872	0.889	1.018	1.089	1.351				
Max. cylinder pressure	bar :	71.2	75.4	76.7	79.2	78.9				
Max. pressure rise	bar/deg :	9.8	9.3	9.9	10.8	10.4				
	bar/ms :	119.6	97.4	85.8	73.2	51.3				
Oil temperature	deg C :	87.0	88.0	87.0	86.0	84.0				
Water IN temperature	deg C :	55.0	49.0	45.0	43.0	42.0				
Water OUT temperature	deg C :	80.0	78.0	78.0	77.0	78.0				
Exhaust temperature	deg C :	275.0	244.0	222.0	200.0	192.0				

ENGINE TEST RESULTS

PAGE 43

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDN3.9
DENSITY Kg/l : 0.849
CAL. VALUE MJ/Kg : 38.62

DATE : 10:05 85
TEST ID : UNID014

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		2000	1700	1400	1100	800	
		33 % LOAD (Nominal)		20 deg BTDC			
Observed load	N :	4.53	4.43	4.41	4.45	4.28	
Observed torque	NM :	36.3	35.5	35.3	35.6	34.3	
Observed speed	RPM :	2032	1744	1440	1129	807	
Observed power	KW :	7.7	6.5	5.3	4.2	2.9	
Air temperature	deg C :	29.0	28.0	27.0	28.0	27.0	
Barometric pressure	mBar :	1022.5	1022.5	1022.5	1022.5	1022.5	
Correction factor	:	0.989	0.987	0.986	0.987	0.986	
Corrected torque	NM :	35.9	35.0	34.8	35.1	33.8	
Corrected power	KW :	7.6	6.4	5.2	4.2	2.9	
Fuel consumed	gms :	31.6	29.1	28.4	30.7	31.3	
Measurement time	seconds :	29.970	34.790	41.990	53.550	74.780	
Fuel mass flow	gms/sec :	1.05	0.84	0.68	0.57	0.42	
B.S.F.C.	gms/KW/hr :	497.3	470.7	464.4	496.6	527.6	
Thermal efficiency	% :	18.7	19.8	20.1	18.8	17.7	
Fuel temperature	deg C :	32.0	33.0	32.0	32.0	32.0	
Pump delivery/stroke	mm ³ :	24.9	23.0	22.5	24.4	24.9	
	mgms :	20.8	19.2	18.8	20.3	20.7	
Start of injection deg.	max :	12.7	11.2	11.9	17.2	17.2	
	min :	12.3	11.1	11.1	16.5	16.3	
	mean :	12.4	11.2	11.7	16.9	16.6	
Start of combustion deg.	max :	1.2	2.1	3.8	9.3	10.9	
	min :	1.0	2.0	3.0	9.1	10.0	
	mean :	1.1	2.1	3.6	9.2	10.3	
Ignition delay	deg	max :	11.5	9.2	8.2	8.0	6.5
	min :	11.2	9.0	8.1	7.2	6.2	
	mean :	11.3	9.1	8.1	7.7	6.3	
Ignition delay	ms	max :	0.943	0.881	0.949	1.186	1.344
	min :	0.919	0.856	0.933	1.067	1.238	
	mean :	0.931	0.870	0.940	1.141	1.309	
Max. cylinder pressure	bar :	60.1	60.2	60.5	68.6	66.5	
Max. pressure rise	bar/deg :	7.6	6.1	6.9	9.8	9.4	
	bar/ms :	93.0	64.0	59.3	66.6	45.6	
Oil temperature	deg C :	85.0	86.0	85.0	84.0	82.0	
Water IN temperature	deg C :	38.0	37.0	40.0	43.0	52.0	
Water OUT temperature	deg C :	77.0	76.0	77.0	78.0	77.0	
Exhaust temperature	deg C :	186.0	167.0	149.0	139.0	131.0	

ENGINE TEST RESULTS

PAGE 44

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : TEGDN3.9
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 38.62

DATE : 10:05 85
 TEST ID : UNID014

DYNQ TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
IDLE CONDITION		20 deg BTDC
Observed load	N	0.34
Observed torque	NM	2.7
Observed speed	RPM	818
Observed power	KW	.2
Air temperature	deg C	27.0
Barometric pressure	mBar	1022.5
Correction factor		0.986
Corrected torque	NM	2.7
Corrected power	KW	.2
Fuel consumed	gms	15.5
Measurement time	seconds	73.610
Fuel mass flow	gms/sec	0.21
B.S.F.C.	gms/KW/hr	3316.0
Thermal efficiency	%	2.8
Fuel temperature	deg C	32.0
Pump delivery/stroke	mm ³	12.3
	mgms	10.3
Start of injection deg.	max	15.5
	min	14.6
	mean	15.0
Start of combustion deg.	max	9.2
	min	8.2
	mean	8.5
Ignition delay deg	max	7.2
	min	6.2
	mean	6.5
Ignition delay ms	max	1.458
	min	1.263
	mean	1.327
Max. cylinder pressure	bar	56.1
Max. pressure rise	bar/deg	7.1
	bar/ms	34.7
Oil temperature	deg C	80.0
Water IN temperature	deg C	51.0
Water OUT temperature	deg C	76.0
Exhaust temperature	deg C	93.0

ENGINE TEST RESULTS

PAGE 45

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDN3.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DATE : 10:05 85
TEST ID : UNID015

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	100 % LOAD (Nominal)		26 deg BTDC			
Observed load	N :	15.92	17.82	17.78	18.04	18.10
Observed torque	NM :	127.4	142.7	142.3	144.5	144.9
Observed speed	RPM :	2019	1732	1447	1119	814
Observed power	KW :	26.9	25.9	21.6	18.9	12.4
Air temperature	deg C :	29.0	29.0	29.0	30.0	28.0
Barometric pressure	mBar :	1022.5	1022.5	1022.5	1022.5	1022.5
Correction factor	:	0.989	0.989	0.989	0.991	0.987
Corrected torque	NM :	126.0	141.1	140.8	143.1	143.0
Corrected power	KW :	26.6	25.6	21.3	18.8	12.2
Fuel consumed	gms :	80.5	85.6	89.5	91.4	89.2
Measurement time	seconds :	30.190	34.990	41.790	53.990	73.990
Fuel mass flow	gms/sec :	2.67	2.45	2.14	1.69	1.21
B.S.F.C.	gms/KW/hr :	360.3	344.2	361.4	363.4	355.9
Thermal efficiency	% :	25.9	27.1	25.8	25.6	26.2
Fuel temperature	deg C :	31.0	31.0	31.0	32.0	31.0
Pump delivery/stroke	mm ³ :	63.3	67.7	70.9	72.6	71.0
	mgms :	52.8	56.5	59.2	60.5	59.2
Start of injection deg.	max :	24.7	26.4	27.3	28.0	22.6
	min :	24.5	26.3	27.1	27.2	21.7
	mean :	24.6	26.4	27.2	27.7	21.9
Start of combustion deg.	max :	12.0	14.7	15.4	16.4	14.6
	min :	11.8	13.6	14.5	16.3	14.5
	mean :	11.9	14.1	15.2	16.4	14.6
Ignition delay	deg max :	12.9	12.7	12.7	11.6	8.0
	min :	12.6	11.6	11.7	10.8	7.1
	mean :	12.7	12.3	12.0	11.3	7.4
Ignition delay	ms max :	1.065	1.226	1.457	1.733	1.640
	min :	1.044	1.120	1.348	1.615	1.462
	mean :	1.052	1.183	1.379	1.687	1.508
Max. cylinder pressure	bar :	97.4	100.7	101.7	101.7	95.0
Max. pressure rise	bar/deg :	19.4	20.3	20.2	21.7	12.2
	bar/ms :	234.7	210.6	175.5	145.9	59.4
Oil temperature	deg C :	83.0	87.0	88.0	88.0	87.0
Water IN temperature	deg C :	59.0	65.0	68.0	71.0	68.0
Water OUT temperature	deg C :	81.0	82.0	83.0	83.0	83.0
Exhaust temperature	deg C :	377.0	373.0	369.0	341.0	309.0

ENGINE TEST RESULTS

PAGE 46

DATE : 10/05/85
TEST ID : UNID015ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860FUEL
EMULSION : TEGDMS.9
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 38.62

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000		1700		1400		1100		800	
	67 % LOAD (Nominal)		26 deg BTDC							
Observed load	N	11.37	10.46	11.41	11.10	10.97				
Observed torque	NM	91.0	83.8	91.3	88.9	87.9				
Observed speed	RPM	2033	1738	1427	1139	808				
Observed power	KW	19.4	15.3	13.6	10.6	7.4				
Air temperature	deg C	29.0	29.0	28.0	28.0	28.0				
Barometric pressure	mBar	1022.5	1022.5	1022.5	1022.5	1022.5				
Correction factor		0.989	0.989	0.987	0.987	0.987				
Corrected torque	NM	90.0	82.8	90.2	87.7	86.7				
Corrected power	KW	19.2	15.1	13.5	10.5	7.3				
Fuel consumed	gms	52.9	48.9	52.2	51.7	51.1				
Measurement time	seconds	29.990	34.790	42.390	52.990	74.590				
Fuel mass flow	gms/sec	1.76	1.41	1.23	0.98	0.69				
B.S.F.C.	gms/KW/hr	331.3	335.5	329.1	335.6	335.9				
Thermal efficiency	%	28.1	27.8	28.3	27.8	27.8				
Fuel temperature	deg C	32.0	32.0	33.0	33.0	33.0				
Pump delivery/stroke	mm ³	41.6	38.8	41.5	41.1	40.7				
	mgms	34.7	32.3	34.5	34.3	33.9				
Start of injection deg.	max	21.0	22.0	23.5	24.5	22.6				
	min	20.9	21.0	22.7	23.8	21.8				
	mean	21.0	21.7	23.0	24.3	22.3				
Start of combustion deg.	max	9.1	10.1	12.8	14.7	14.6				
	min	8.3	9.9	12.0	13.6	13.7				
	mean	8.9	10.0	12.6	14.4	14.1				
Ignition delay	deg	max	12.7	12.1	10.8	10.7	8.8			
	min	11.8	10.8	9.9	9.2	7.5				
	mean	12.0	11.7	10.4	9.8	8.2				
Ignition delay	ms	max	1.042	1.155	1.263	1.571	1.819			
	min	0.969	1.038	1.159	1.344	1.542				
	mean	0.986	1.120	1.219	1.438	1.698				
Max. cylinder pressure	bar	82.2	83.2	85.4	85.3	81.3				
Max. pressure rise	bar/deg	12.6	12.6	14.5	15.5	11.1				
	bar/ms	154.0	131.4	123.9	105.7	53.9				
Oil temperature	deg C	90.0	90.0	90.0	88.0	87.0				
Water IN temperature	deg C	54.0	48.0	45.0	45.0	46.0				
Water OUT temperature	deg C	80.0	79.0	79.0	80.0	80.0				
Exhaust temperature	deg C	271.0	237.0	232.0	213.0	195.0				

ENGINE TEST RESULTS

PAGE 47

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
EMULSION : TEGDNS.9
DENSITY Kg/l : 0.949
CAL VALUE MJ/Kg : 38.62

DATE : 10:05:85
TEST ID : UNID015

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	900
	33 % LOAD (Nominal)		26 deg BTDC		
Observed load	N : 4.75	4.23	4.65	4.47	4.70
Observed torque	NM : 38.0	33.9	37.2	35.8	37.6
Observed speed	RPM : 2038	1732	1442	1130	821
Observed power	KW : 8.1	6.1	5.6	4.2	3.2
Air temperature	deg C : 27.0	27.0	27.0	27.0	27.0
Barometric pressure	mBar : 1022.5	1022.5	1022.5	1022.5	1022.5
Correction factor	: 0.986	0.986	0.986	0.986	0.986
Corrected torque	NM : 37.5	33.4	36.7	35.3	37.1
Corrected power	KW : 8.0	6.1	5.5	4.2	3.2
Fuel consumed	gms : 32.3	29.7	29.5	30.1	35.1
Measurement time	seconds : 29.790	34.990	41.990	53.590	73.380
Fuel mass flow	gms/sec : 1.08	0.85	0.70	0.56	0.48
B.S.F.C.	gms/KW/hr : 488.3	504.5	456.5	484.3	540.1
Thermal efficiency	% : 19.1	18.5	20.4	19.2	17.3
Fuel temperature	deg C : 32.0	33.0	32.0	32.0	32.0
Pump delivery/stroke	mm ³ : 25.5	23.5	23.4	23.9	28.0
	mgms : 21.3	19.6	19.5	19.9	23.3
Start of injection deg.	max : 18.3	17.5	18.2	22.6	22.6
	min : 17.8	16.5	17.3	21.9	22.5
	mean : 18.1	16.9	17.6	22.3	22.6
Start of combustion deg.	max : 5.7	6.6	9.3	12.9	14.6
	min : 5.6	6.4	8.2	11.9	13.7
	mean : 5.6	6.5	8.4	12.6	13.9
Ignition delay	deg max : 12.7	10.9	9.9	10.0	8.9
	min : 12.1	10.0	8.9	9.1	8.0
	mean : 12.5	10.4	9.2	9.7	8.7
Ignition delay	ms max : 1.036	1.053	1.141	1.474	1.806
	min : 0.997	0.965	1.029	1.336	1.621
	mean : 1.020	1.001	1.064	1.435	1.761
Max. cylinder pressure	bar : 67.9	66.3	65.8	70.2	71.4
Max. pressure rise	bar/deg : 8.6	8.6	8.9	10.0	10.8
	bar/ms : 105.6	89.5	76.7	67.9	53.3
Oil temperature	deg C : 87.0	87.0	87.0	85.0	84.0
Water IN temperature	deg C : 41.0	41.0	49.0	54.0	53.0
Water OUT temperature	deg C : 78.0	78.0	78.0	80.0	83.0
Exhaust temperature	deg C : 187.0	185.0	150.0	139.0	139.0

ENGINE TEST RESULTS

PAGE 48

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : TEGDN3.9
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 38.62

DATE : 10:05:85
 TEST ID : UNID015

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
	IDLE CONDITION	26 deg BTDC
Observed load	N :	0.37
Observed torque	NM :	3.0
Observed speed	RPM :	829
Observed power	KW :	.3
Air temperature	deg C :	26.0
Barometric pressure	mBar :	1022.6
Correction factor	:	0.984
Corrected torque	NM :	2.9
Corrected power	KW :	.3
Fuel consumed	gms :	15.8
Measurement time	seconds :	72.780
Fuel mass flow	gms/sec :	0.22
B.S.F.C.	gms/KW/hr :	3086.9
Thermal efficiency	% :	3.0
Fuel temperature	deg C :	31.0
Pump delivery/stroke	mm ³ :	12.5
	mgms :	10.5
Start of injection deg.	max :	20.9
	min :	20.2
	mean :	20.7
Start of combustion deg.	max :	12.8
	min :	11.9
	mean :	12.1
Ignition delay deg	max :	8.9
	min :	8.1
	mean :	8.6
Ignition delay ms	max :	1.784
	min :	1.624
	mean :	1.723
Max. cylinder pressure	bar :	57.2
Max. pressure rise	bar/deg :	6.4
	bar/ms :	31.9
Oil temperature	deg C :	79.0
Water IN temperature	deg C :	62.0
Water OUT temperature	deg C :	69.0
Exhaust temperature	deg C :	89.0

ENGINE TEST RESULTS

PAGE 49

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 14/6/85
TEST ID : UNID016

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800	
	100 % LOAD (Nominal)		18 deg BTDC			
Observed load	N :	18.89	20.11	19.93	19.42	19.40
Observed torque	NM :	151.2	161.0	159.6	155.5	155.3
Observed speed	RPM :	2038	1714	1452	1142	839
Observed power	KW :	32.3	28.9	24.3	18.6	13.6
Air temperature	deg C :	32.0	32.0	33.0	30.0	30.0
Barometric pressure	mBar :	1021.5	1021.5	1021.5	1021.5	1021.5
Correction factor	:	0.994	0.994	0.996	0.991	0.991
Corrected torque	NM :	150.4	160.1	159.0	154.1	153.9
Corrected power	KW :	32.1	28.7	24.2	18.4	13.5
Fuel consumed	gms :	82.3	86.6	89.1	92.5	91.5
Measurement time	seconds :	30.000	35.390	41.790	52.990	71.780
Fuel mass flow	gms/sec :	2.76	2.45	2.13	1.75	1.27
B.S.F.C.	gms/KW/hr :	309.6	306.5	317.7	340.9	339.2
Thermal efficiency	% :	27.2	27.5	26.5	24.7	24.8
Fuel temperature	deg C :	30.0	32.0	33.0	32.0	32.0
Pump delivery/stroke	mm+3 :	64.8	68.5	70.5	73.3	72.9
	µgms :	54.2	57.1	58.8	61.1	60.8
Start of injection deg.	max :	18.2	19.1	19.9	20.9	14.6
	min :	17.4	19.0	19.2	20.8	13.9
	mean :	17.7	19.1	19.8	20.8	14.4
Start of combustion deg.	max :	8.2	10.1	10.9	12.8	9.2
	min :	7.3	9.1	10.8	11.9	9.1
	mean :	7.7	9.6	10.8	12.6	9.1
Ignition delay	deg max :	10.9	10.0	9.1	8.9	5.5
	min :	9.3	9.0	8.4	8.1	4.8
	mean :	10.0	9.4	8.9	8.3	5.3
Ignition delay	ms max :	0.888	0.968	1.047	1.301	1.091
	min :	0.758	0.877	0.964	1.178	0.955
	mean :	0.818	0.916	1.025	1.208	1.052
Max. cylinder pressure	bar :	90.8	95.5	96.9	98.6	89.0
Max. pressure rise	bar/deg :	13.6	14.3	12.4	14.1	9.4
	bar/ms :	166.8	147.1	108.0	96.6	47.5
Oil temperature	deg C :	83.0	94.0	94.0	92.0	89.0
Water IN temperature	deg C :	55.0	68.0	69.0	68.0	67.0
Water OUT temperature	deg C :	85.0	87.0	87.0	86.0	86.0
Exhaust temperature	deg C :	420.0	412.0	400.0	360.0	322.0

ENGINE TEST RESULTS

PAGE 50

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 DISTILLATE : DIST 100
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 42.75

DATE : 14/6/85
 TEST ID : UNID016

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	67 % LOAD (Nominal)		18 deg BTDC		
Observed load	N : 10.82	10.86	11.49	10.39	11.59
Observed torque	NM : 86.7	86.9	92.0	83.2	92.8
Observed speed	RPM : 2044	1732	1438	1127	835
Observed power	KW : 18.6	15.8	13.8	9.8	8.1
Air temperature	deg C : 30.0	30.0	29.0	29.0	28.0
Barometric pressure	mBar : 1021.0	1021.0	1021.0	1021.0	1021.0
Correction factor	: 0.992	0.992	0.990	0.990	0.988
Corrected torque	NM : 85.9	86.2	91.0	82.4	91.7
Corrected power	KW : 18.4	15.6	13.7	9.7	8.0
Fuel consumed	gms : 45.1	44.0	45.5	41.9	43.5
Measurement time	seconds : 29.790	34.990	42.190	53.590	72.180
Fuel mass flow	gms/sec : 1.51	1.26	1.08	0.78	0.60
B.S.F.C.	gms/KW/hr : 296.3	289.6	283.2	289.5	270.7
Thermal efficiency	% : 28.4	29.1	29.7	29.1	31.1
Fuel temperature	deg C : 32.0	33.0	32.0	32.0	31.0
Pump delivery/stroke	mm ³ : 35.5	34.9	36.0	33.3	34.6
	mgms : 29.6	29.0	30.0	27.7	28.9
Start of injection deg.	max : 12.9	13.8	15.5	16.4	12.7
	min : 12.6	13.7	15.4	16.4	12.0
	mean : 12.8	13.7	15.5	16.4	12.6
Start of combustion deg.	max : 2.8	4.7	6.6	9.1	6.6
	min : 2.8	4.6	6.5	8.4	6.5
	mean : 2.8	4.6	6.5	9.0	6.5
Ignition delay	deg max : 10.1	9.2	9.0	7.9	6.2
	min : 9.8	9.0	8.8	7.2	5.5
	mean : 10.0	9.1	8.9	7.4	6.0
Ignition delay	ms max : 0.820	0.881	1.043	1.175	1.237
	min : 0.798	0.867	1.023	1.070	1.103
	mean : 0.814	0.876	1.035	1.099	1.203
Max. cylinder pressure	bar : 69.2	71.9	75.0	76.5	70.4
Max. pressure rise	bar/deg : 8.6	9.2	10.6	10.2	9.2
	bar/ms : 105.7	95.3	91.8	69.0	46.0
Oil temperature	deg C : 90.0	91.0	90.0	88.0	86.0
Water IN temperature	deg C : 52.0	45.0	40.0	40.0	39.0
Water OUT temperature	deg C : 83.0	82.0	81.0	81.0	81.0
Exhaust temperature	deg C : 269.0	239.0	226.0	196.0	185.0

ENGINE TEST RESULTS

PAGE 51

ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860

FUEL
DISTILLATE : DIST 100
DENSITY Kg/l : 0.849
CAL VALUE MJ/Kg : 42.75

DATE : 14/6/85
TEST ID : UNID016

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	33 % LOAD (Nominal)		18 deg BTDC				
Observed load	N :	4.44	4.55	4.77	4.56	4.51	
Observed torque	NM :	35.5	36.5	38.2	36.5	36.1	
Observed speed	RPM :	2033	1724	1427	1106	813	
Observed power	KW :	7.6	6.6	5.7	4.2	3.1	
Air temperature	deg C :	29.0	29.0	28.0	28.0	27.0	
Barometric pressure	mBar :	1021.0	1021.0	1021.0	1021.0	1021.0	
Correction factor	:	0.990	0.990	0.988	0.988	0.987	
Corrected torque	NM :	35.2	36.1	37.7	36.1	35.7	
Corrected power	KW :	7.5	6.5	5.6	4.2	3.0	
Fuel consumed	gms :	27.8	27.0	26.0	28.2	26.2	
Measurement time	seconds :	29.990	35.190	42.390	54.590	74.180	
Fuel mass flow	gms/sec :	0.93	0.77	0.61	0.52	0.35	
B.S.F.C.	gms/KW/hr :	445.9	423.9	391.8	444.8	419.0	
Thermal efficiency	% :	18.9	19.9	21.5	18.9	20.1	
Fuel temperature	deg C :	32.0	32.0	32.0	31.0	31.0	
Pump delivery/stroke	mm ³ :	21.9	21.4	20.6	22.4	20.8	
	mgms :	18.2	17.8	17.2	18.7	17.4	
Start of injection deg.	max :	9.5	10.1	12.1	15.4	11.9	
	min :	9.3	9.5	12.0	13.7	11.0	
	mean :	9.4	10.0	12.1	14.6	11.2	
Start of combustion deg.	max :	-1.0	.4	3.9	7.4	5.5	
	min :	-1.6	.1	3.0	6.5	5.5	
	mean :	-1.4	.3	3.4	6.9	5.5	
Ignition delay	deg	max :	11.1	9.9	9.1	8.0	6.4
	min :	10.4	9.1	8.2	7.2	5.5	
	mean :	10.8	9.7	8.7	7.7	5.7	
Ignition delay	ms	max :	0.907	0.962	1.062	1.210	1.313
	min :	0.855	0.881	0.955	1.091	1.123	
	mean :	0.887	0.940	1.016	1.160	1.167	
Max. cylinder pressure	bar :	55.5	57.9	60.5	65.4	59.9	
Max. pressure rise	bar/deg :	5.6	6.5	7.9	9.8	6.7	
	bar/ms :	68.4	67.6	67.8	64.7	32.8	
Oil temperature	deg C :	88.0	89.0	87.0	84.0	83.0	
Water IN temperature	deg C :	43.0	38.0	36.0	34.0	33.0	
Water OUT temperature	deg C :	81.0	79.0	79.0	79.0	78.0	
Exhaust temperature	deg C :	184.0	187.0	151.0	136.0	127.0	

ENGINE TEST RESULTS

PAGE 52

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 DISTILLATE : DIST 100
 DENSITY Kg/l : 0.849
 CAL VALUE MJ/Kg : 42.75

DATE : 14/6/85
 TEST ID : UNID016

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
	IDLE CONDITION	18 deg B10C
Observed load	N :	0.38
Observed torque	NM :	3.1
Observed speed	RPM :	814
Observed power	KW :	.3
Air temperature	deg C :	26.0
Barometric pressure	mBar :	1021.0
Correction factor	:	0.985
Corrected torque	NM :	3.0
Corrected power	KW :	.3
Fuel consumed	gms :	14.0
Measurement time	seconds :	74.010
Fuel mass flow	gms/sec :	0.19
B.S.F.C.	gms/KW/hr :	2642.6
Thermal efficiency	% :	3.2
Fuel temperature	deg C :	30.0
Pump delivery/stroke	mm ³ :	11.1
	mgms :	9.3
Start of injection deg.	max :	10.9
	min :	10.4
	mean :	10.6
Start of combustion deg.	max :	4.7
	min :	4.1
	mean :	4.5
Ignition delay deg	max :	6.3
	min :	5.9
	mean :	6.1
Ignition delay ms	max :	1.288
	min :	1.203
	mean :	1.239
Max. cylinder pressure	bar :	51.7
Max. pressure rise	bar/deg :	5.5
	bar/ms :	26.8
Oil temperature	deg C :	80.0
Water IN temperature	deg C :	38.0
Water OUT temperature	deg C :	76.0
Exhaust temperature	deg C :	93.0

ENGINE TEST RESULTS

PAGE 53

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E25/3.9TEGDN
 DENSITY Kg/l : 0.848
 CAL VALUE MJ/Kg : 37.66

DATE : 14/6/85
 TEST ID : UNID017

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	100 % LOAD (Nominal)		18 deg BTDC		
Observed load N :	17.73	18.77	19.39	18.77	18.55
Observed torque NM :	141.9	150.3	155.2	150.3	148.5
Observed speed RPM :	2040	1724	1439	1126	833
Observed power KW :	30.3	27.1	23.4	17.7	13.0
Air temperature deg C :	30.0	29.0	30.0	29.0	29.0
Barometric pressure mBar :	1020.0	1020.0	1020.0	1020.0	1020.0
Correction factor :	0.992	0.990	0.992	0.990	0.990
Corrected torque NM :	140.8	148.9	154.0	148.9	147.1
Corrected power KW :	30.1	26.9	23.2	17.6	12.8
Fuel consumed gms :	82.7	84.8	90.8	93.4	91.6
Measurement time seconds :	29.790	35.190	42.000	53.590	72.380
Fuel mass flow gms/sec :	2.78	2.41	2.16	1.74	1.27
B.S.F.C. gms/KW/hr :	332.2	322.9	335.4	357.4	355.1
Thermal efficiency % :	28.8	29.6	28.5	26.7	26.9
Fuel temperature deg C :	26.0	27.0	27.0	28.0	29.0
Pump delivery/stroke mm ³ :	64.9	66.8	71.8	74.0	72.7
mgms :	54.4	55.9	60.1	61.9	60.8
Start of injection deg. max :	17.4	18.3	20.0	21.0	15.5
min :	17.3	18.2	19.2	20.0	15.3
mean :	17.3	18.2	19.5	20.4	15.4
Start of combustion deg. max :	7.2	9.8	10.9	12.9	9.3
min :	7.2	9.1	10.1	11.8	9.2
mean :	7.2	9.3	10.7	12.1	9.2
Ignition delay deg. max :	10.1	9.1	9.9	9.1	6.3
min :	10.1	8.4	8.3	7.2	6.1
mean :	10.1	9.0	8.8	8.3	6.2
Ignition delay ms. max :	0.829	0.884	1.143	1.352	1.268
min :	0.823	0.817	0.965	1.065	1.220
mean :	0.826	0.868	1.020	1.228	1.245
Max. cylinder pressure bar :	89.3	93.3	94.6	97.1	89.1
Max. pressure rise bar/deg :	15.5	15.4	14.2	15.5	10.1
bar/ms :	189.7	159.3	122.6	104.9	50.7
Oil temperature deg C :	77.0	82.0	83.0	84.0	83.0
Water IN temperature deg C :	50.0	57.0	61.0	63.0	63.0
Water OUT temperature deg C :	82.0	82.0	82.0	83.0	83.0
Exhaust temperature deg C :	372.0	364.0	366.0	336.0	308.0

ENGINE TEST RESULTS

PAGE 54

DATE : 14/6/85
TEST ID : UNID017ENGINE
MAKE : FORD
MODEL : 3000
No CYL : 3
CAPACITY cc : 2860FUEL
EMULSION : E25/3.9TE6DN
DENSITY Kg/l : 0.848
CAL VALUE MJ/Kg : 37.66

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800		
	67 % LOAD (Nominal)		18 deg BTDC				
Observed load	N :	11.23	11.00	11.13	11.45	11.10	
Observed torque	NM :	89.9	88.1	89.1	91.7	88.9	
Observed speed	RPM :	2025	1732	1428	1141	814	
Observed power	KW :	19.1	16.0	13.3	11.0	7.6	
Air temperature	deg C :	29.0	28.0	28.0	28.0	27.0	
Barometric pressure	mBar :	1020.0	1020.0	1020.0	1020.0	1020.0	
Correction factor	:	0.990	0.989	0.989	0.989	0.987	
Corrected torque	NM :	89.0	87.1	88.1	90.7	87.7	
Corrected power	KW :	18.9	15.8	13.2	10.8	7.5	
Fuel consumed	gms :	52.4	50.3	50.1	49.8	53.9	
Measurement time	seconds :	29.990	34.990	42.390	52.990	74.180	
Fuel mass flow	gms/sec :	1.75	1.44	1.18	0.94	0.73	
B.S.F.C.	gms/KW/hr :	333.2	327.6	323.0	312.2	350.0	
Thermal efficiency	% :	28.7	29.2	29.6	30.6	27.3	
Fuel temperature	deg C :	29.0	30.0	30.0	30.0	30.0	
Pump delivery/stroke	mm ³ :	41.3	39.8	39.7	39.5	42.8	
	mgms :	34.5	33.2	33.1	32.9	35.7	
Start of injection deg.	max :	13.7	13.8	15.4	17.1	13.7	
	min :	13.0	13.7	14.8	16.4	12.8	
	mean :	13.4	13.8	15.1	16.6	13.2	
Start of combust on deg.	max :	2.9	4.7	7.3	9.3	8.2	
	min :	2.8	4.6	6.4	8.4	7.4	
	mean :	2.8	4.6	6.7	9.1	7.6	
Ignition delay	deg	max :	10.8	9.2	8.9	8.0	6.2
	min :	10.2	9.0	7.6	7.3	4.7	
	mean :	10.6	9.1	8.5	7.6	5.6	
Ignition delay	ms	max :	0.892	0.884	1.043	1.167	1.276
	min :	0.838	0.869	0.885	1.064	0.957	
	mean :	0.870	0.877	0.988	1.108	1.138	
Max. cylinder pressure	bar :	72.1	73.7	76.0	77.7	74.9	
Max. pressure rise	bar/deg :	11.2	9.5	11.0	10.0	9.0	
	bar/ms :	136.3	98.2	94.1	69.7	43.9	
Oil temperature	deg C :	85.0	87.0	87.0	85.0	84.0	
Water IN temperature	deg C :	51.0	45.0	43.0	42.0	42.0	
Water OUT temperature	deg C :	81.0	80.0	79.0	79.0	79.0	
Exhaust temperature	deg C :	270.0	236.0	221.0	201.0	190.0	

ENGINE TEST RESULTS

PAGE 55

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2860

FUEL
 EMULSION : E25/3.9TEGDN
 DENSITY Kg/l : 0.848
 CAL VALUE MJ/Kg : 37.66

DATE : 14/6/85
 TEST ID : UNID017

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)	2000	1700	1400	1100	800
	33 % LOAD (Nominal)		18 deg BTDC		
Observed load N :	4.59	4.50	4.29	4.72	4.77
Observed torque NM :	36.7	36.0	34.3	37.9	38.2
Observed speed RPM :	2062	1734	1424	1125	807
Observed power KW :	7.9	6.5	5.1	4.4	3.2
Air temperature deg C :	28.0	28.0	27.0	27.0	26.0
Barometric pressure mBar :	1020.0	1020.0	1020.0	1020.0	1020.0
Correction factor :	0.989	0.989	0.987	0.987	0.986
Corrected torque NM :	36.3	35.6	33.9	37.3	37.6
Corrected power KW :	7.8	6.5	5.1	4.4	3.2
Fuel consumed gms :	31.8	30.2	28.1	32.3	28.2
Measurement time seconds :	29.390	34.990	42.590	53.590	74.780
Fuel mass flow gms/sec :	1.08	0.86	0.66	0.60	0.38
B.S.F.C. gms/KW/hr :	496.7	480.6	469.6	494.1	427.1
Thermal efficiency % :	19.2	19.9	20.4	19.3	22.4
Fuel temperature deg C :	31.0	30.0	30.0	30.0	29.0
Pump delivery/stroke mm+3 :	25.2	23.9	22.2	25.7	22.4
mgms :	21.0	19.9	18.5	21.4	18.7
Start of injection deg. max :	9.3	10.1	10.1	15.5	12.8
min :	9.2	9.3	10.1	14.6	12.1
mean :	9.3	9.8	10.1	14.9	12.5
Start of combustion deg. max :	-1.4	.3	2.0	7.4	7.3
min :	-1.7	.2	1.1	7.3	6.5
mean :	-1.6	.2	1.8	7.4	6.8
Ignition delay deg max :	11.0	10.0	8.9	8.1	6.3
min :	10.6	9.0	8.0	7.3	4.8
mean :	10.8	9.6	8.3	7.5	5.7
Ignition delay ms max :	0.887	0.960	1.045	1.203	1.295
min :	0.859	0.868	0.937	1.076	0.936
mean :	0.875	0.924	0.968	1.110	1.177
Max. cylinder pressure bar :	57.1	58.2	59.9	65.8	62.0
Max. pressure rise bar/deg :	6.3	6.0	7.2	9.5	9.7
bar/ms :	78.0	62.8	61.8	64.0	47.1
Oil temperature deg C :	85.0	86.0	85.0	83.0	81.0
Water IN temperature deg C :	42.0	33.0	30.0	29.0	30.0
Water OUT temperature deg C :	79.0	78.0	78.0	78.0	77.0
Exhaust temperature deg C :	185.0	164.0	145.0	139.0	122.0

ENGINE TEST RESULTS

PAGE 56

ENGINE
 MAKE : FORD
 MODEL : 3000
 No CYL : 3
 CAPACITY cc : 2960

FUEL
 EMULSION : E25/3.9TEGDN
 DENSITY Kg/l : 0.848
 CAL VALUE MJ/Kg : 37.66

DATE : 14/6/85
 TEST ID : UNID017

DYNO TORQUE FACTOR : 35.61

ENGINE SPEED (NOMINAL)		800
	IDLE CONDITION	18 deg BTDC
Observed load	N :	0.34
Observed torque	NM :	2.7
Observed speed	RPM :	809
Observed power	KW :	.2
Air temperature	deg C :	26.0
Barometric pressure	mBar :	1020.0
Correction factor	:	0.986
Corrected torque	NM :	2.7
Corrected power	KW :	.2
Fuel consumed	gms :	15.6
Measurement time	seconds :	74.420
Fuel mass flow	gms/sec :	0.21
B.S.F.C.	gms/KW/hr :	3355.3
Thermal efficiency	% :	2.8
Fuel temperature	deg C :	30.0
Pump delivery/stroke	mm ³ :	12.4
	mgms :	10.4
Start of injection deg.	max :	11.1
	min :	10.9
	mean :	11.0
Start of combustion deg.	max :	5.6
	min :	4.8
	mean :	5.3
Ignition delay	deg max :	6.1
	min :	5.4
	mean :	5.7
Ignition delay	ms max :	1.266
	min :	1.115
	mean :	1.176
Max. cylinder pressure	bar :	53.6
Max. pressure rise	bar/deg :	6.1
	bar/ms :	29.7
Oil temperature	deg C :	79.0
Water IN temperature	deg C :	33.0
Water OUT temperature	deg C :	76.0
Exhaust temperature	deg C :	92.0